




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission.
本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的销售、销售及采购。

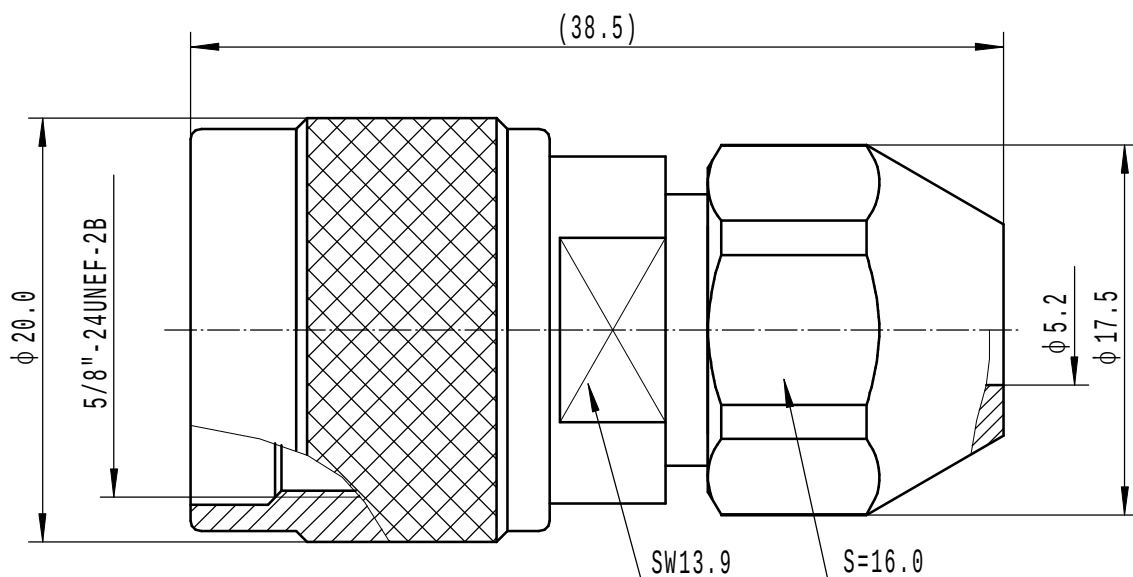

Key performance:


1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~11GHz
3. Contact resistance
Center conductor: $\leq 1.0\ m\Omega$
Outer conductor: $\leq 0.2\ m\Omega$
4. Insulation resistance: $\geq 5000M\Omega$
5. Dielectric withstand voltage: 1500V
6. Durability: 500cycles

Applicable standard: MIL-C-39012

Material&Plating

1. Center contact : brass, gold plated
2. Bodies: brass, nickel plated
3. Insulators: PTFE

Cable Code: RG142

FIRST ANGLE PROJECTION		SCALE	N-J5A	UNITS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES
---------------------------	---	-------	-------	-------	---