



MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 326-4 (SMOOTH BORE)
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	DSCC 94007 & 94008 REF.
FORCE TO ENGAGE	2.0 LBS. MAX.
FORCE TO DISENGAGE	0.5 LBS. MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	3.0 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	3.0 LBS. MIN.
CABLE RETENTION	CABLE DEPENDENT
DURABILITY	1000 CYCLES MIN.
MASS	MASS = 0.78 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	26.5 GHz
VSWR DC - 20 GHz	1.15:1 MAX.
20 - 26.5 GHz	1.20:1 MAX.
INSERTION LOSS	0.04 √F (GHz)dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	500 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 3 GHz	-80 dB MIN.
3 - 26.5 GHz	-65 dB MIN.
CORONA	130 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL (5 MHz)	325 Vrms MIN.
CONTACT RESISTANCE (INNER)	6.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-65°C TO 165°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, EXCEPT STEP 7B
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
BODY, SHROUD	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATED PER ASTM-A-967
REAR BODY, CONTACT	BERYLLIUM COPPER, PER ASTM-B-196, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
INSULATOR(S)	POLYPHENYLENE SULFIDE (PPS), PER ASTM-D-6358
APPLICATION	
CABLE(S)	UGF070D
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

NOTE:

- INDICATED DIMENSIONS APPLY WITH REQUIRED PANEL THICKNESS.
- MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	6/14/07	MPK	RS
A1	ECO 105240	3/29/2010	MJM	RS

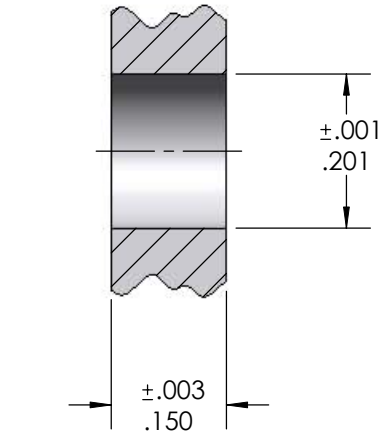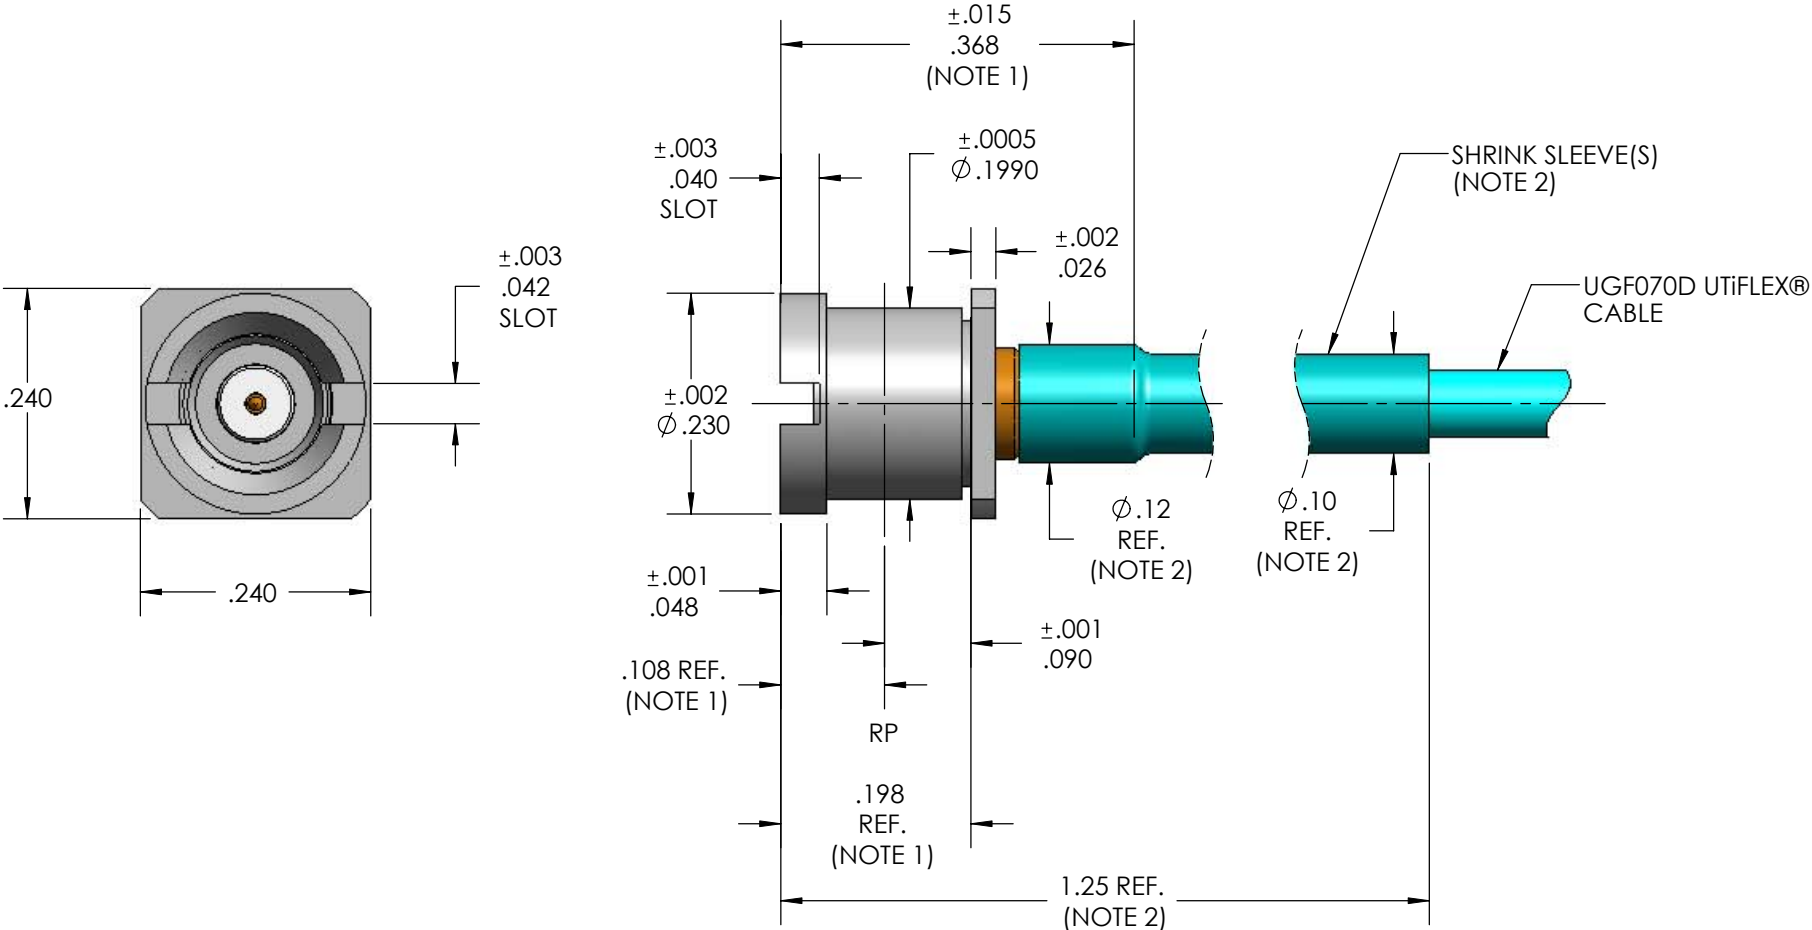

REQUIRED PANEL THICKNESS

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		<div>MICRO-COAX<sup>®</sup></div> <div>Leading the way in transmission line solutions.</div> <div>Copyright Micro-Coax, Inc.</div>								
		DWN.	JMK	10/27/05										
		CHKD.	MJR	4/8/10										
		APPVD.												
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE								SMP PIN, BULKHEAD, SMOOTH BORE, UGF070D				
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.				FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV			
.XXX	± .005					64639	B	5:1	1 OF 1	SD904185	A1			
.XXXX	± .0010													
ANGLES	± 2°													