


Ceramic

Frequency Mixer WIDE BAND

Level 7 (LO Power+7 dBm) 1600 to 6000 MHz

MCA1T-60+



CASE STYLE: DZ885-2

PRICE: \$6.45 ea. QTY (10-49)

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -40°C to 85°C

RF Power 50 mW

IF Current 40 mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO 10

RF 5

IF 3

GROUND 1,2,4,6,7,8,9

Features

- wide bandwidth, 1600 to 6000 MHz
- useable to 8000 MHz
- IF, DC to 2000 MHz
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.095"
- protected by US Patent 7,027,795 & 8,749,989


Applications

- PCN
- defense & weather radar
- WCDMA
- defense communications

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

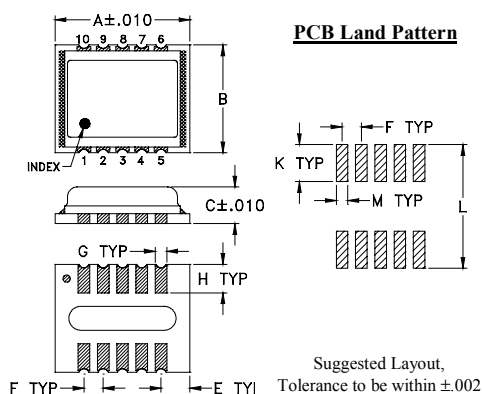


Outline Dimensions (inch)

A	B	C	E	F	G
.350	.280	.095	.075	.050	.030
8.89	7.11	2.41	1.91	1.27	0.76
H	K	L	M	wt	
.074	.096	.321	.030	grams	
1.88	2.44	8.15	0.76	0.21	

Demo Board MCL P/N: TB-493+

Suggested PCB Layout (PL-288)

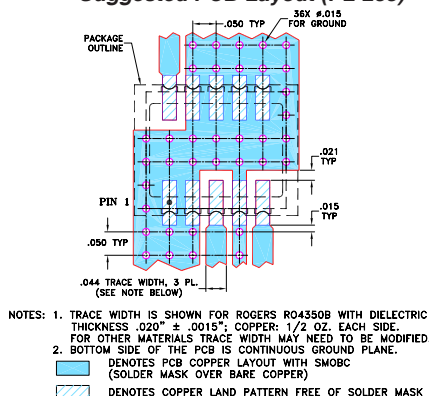

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Electrical Specifications (T_{AMB}=-40°C to 85°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f _L -f _U	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
1600-4400	DC-2000	6.3	0.2	8.3*	32	20	17	—	9
4400-6000	DC-2000	6.2	0.3	8.5*	23	17	18	—	8


1 dB COMPR. +1 dBm typ.

*Conversion loss at 30 MHz IF, increases with IF frequency. See Graphs









Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1600.00	1630.00	5.85	33.44	18.92	3.21	2.77
1800.00	1830.00	5.57	43.23	20.13	2.72	3.06
2000.00	2030.00	5.67	35.50	19.59	1.52	3.18
2300.00	2330.00	5.57	30.85	17.13	2.55	2.32
2500.00	2530.00	5.67	31.53	16.64	3.70	1.12
3000.00	3030.00	6.65	33.86	17.37	6.40	4.50
3300.00	3330.00	6.51	33.27	17.79	2.35	4.42
3500.00	3530.00	6.26	32.26	16.02	2.17	2.74
3800.00	3830.00	5.85	33.61	14.80	2.21	4.29
4000.00	4030.00	6.13	34.90	16.01	2.03	3.49
4300.00	4330.00	6.05	33.36	17.95	1.97	3.60
4500.00	4530.00	5.95	29.83	18.64	2.31	2.60
4700.00	4730.00	6.02	28.69	19.14	1.78	2.51
4900.00	4930.00	6.11	25.78	19.89	1.91	2.02
5000.00	5030.00	5.99	24.51	20.40	1.50	1.54
5200.00	5230.00	5.88	23.40	21.37	1.53	1.71
5300.00	5330.00	6.06	22.68	21.68	2.25	2.45
5500.00	5530.00	6.00	22.63	19.20	3.70	3.96
5700.00	5730.00	6.14	23.13	15.10	5.34	6.43
6000.00	6030.00	6.61	24.37	13.33	1.73	2.81

Electrical Schematic

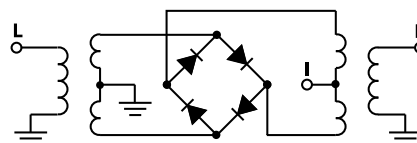

REV. OR
M124558
MCA1T-60+
DJ/RS/CP
140626

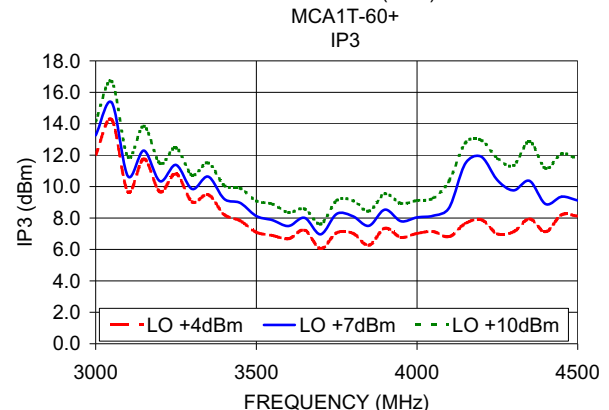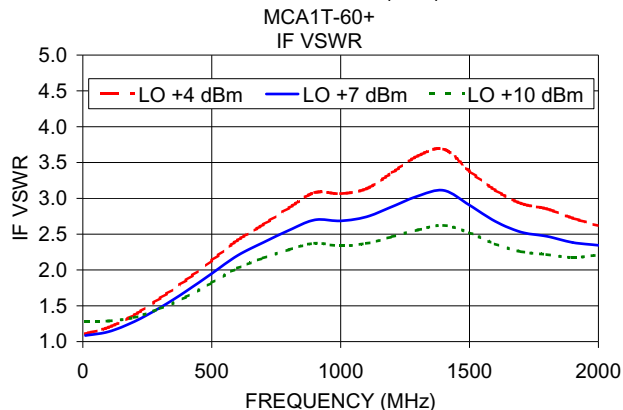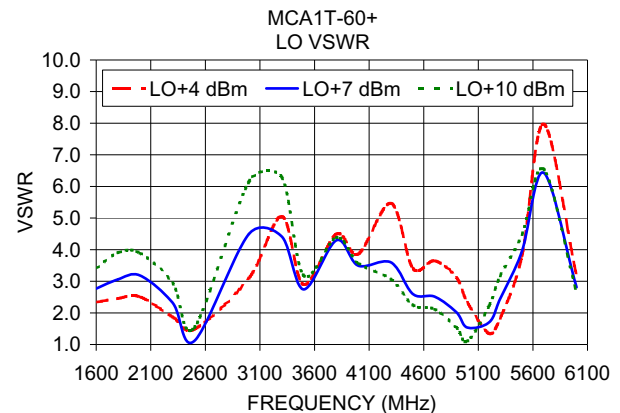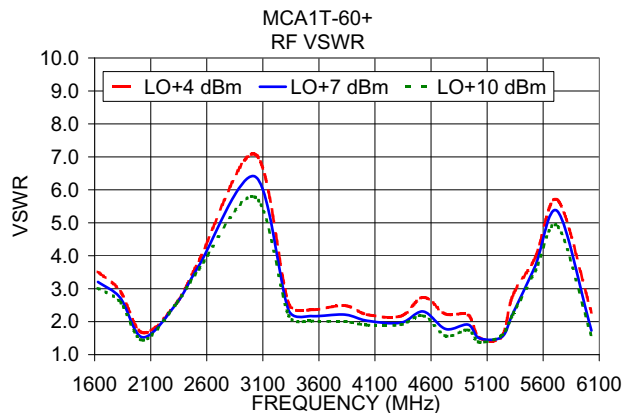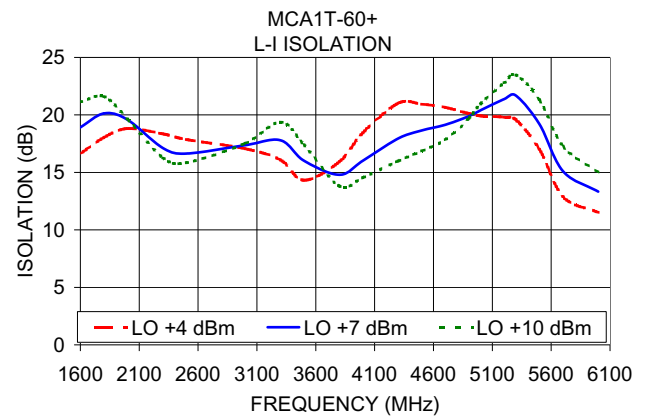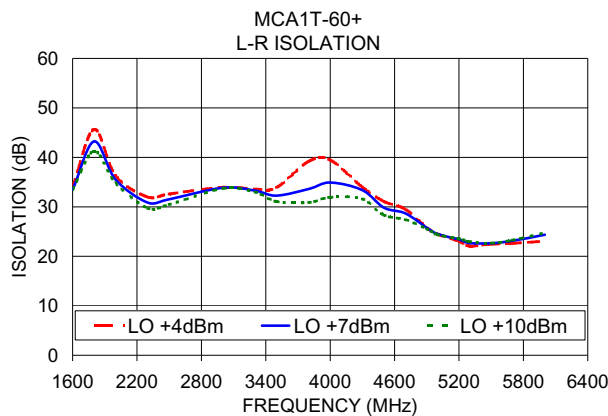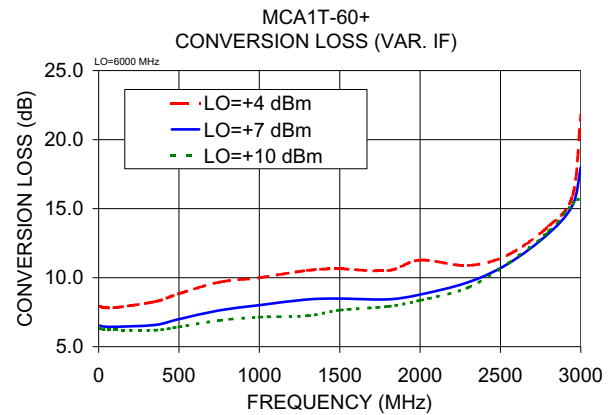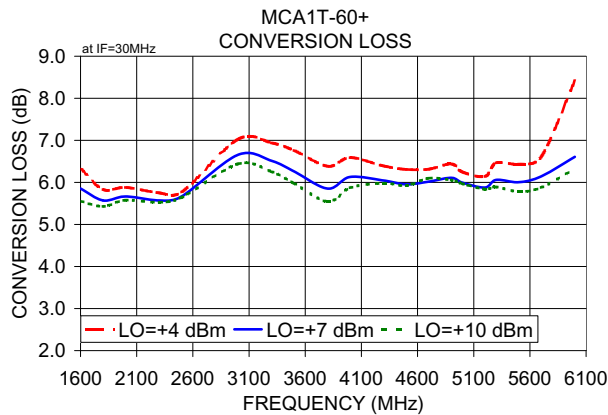

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp

