



MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 323.1
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	IEEE P287/D3
RECOMMENDED MATING TORQUE	9 IN-LBS. NOM.
COUPLING PROOF TORQUE	15 IN-LBS MIN.
COUPLING NUT RETENTION	60 LBS. MIN.
FORCE TO ENGAGE	2 LBS. MAX.
FORCE TO DISENGAGE	2 LBS. MAX.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MIN.
CABLE RETENTION	15 LBS. MIN.
MASS	6.99 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	40 GHz
VSWR DC - 18 GHz	1.16:1 MAX.
18 - 40GHz	1.20:1 MAX
INSERTION LOSS	0.03 √F (GHz)dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	975 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
CORONA	250 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	650 Vrms MIN.
CONTACT RESISTANCE (INNER)	3.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-55 °C TO 150 °C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
BODY, COUPLING NUT, & CLAMP NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATED PER ASTM-A-967
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
CONTACT	BERYLLIUM COPPER, ASTM-B-196 GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
DIELECTRIC STOP	POLYETHERIMIDE THERMOPLASTIC, PER ASTM-D-5205
APPLICATION	
CABLE(S)	142/147 SERIES CABLE
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

REV	DESCRIPTION	DATE	BY	APPVD	CHKD
1	PRELIMINARY RELEASE	9/23/2013	CCF	RS	RS

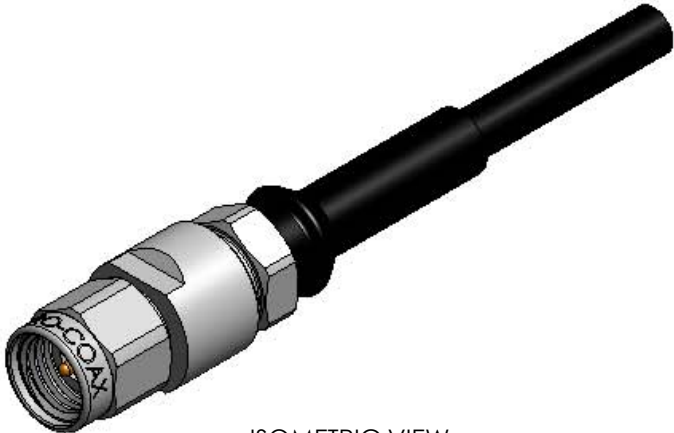

ISOMETRIC VIEW  
SCALE 2:1

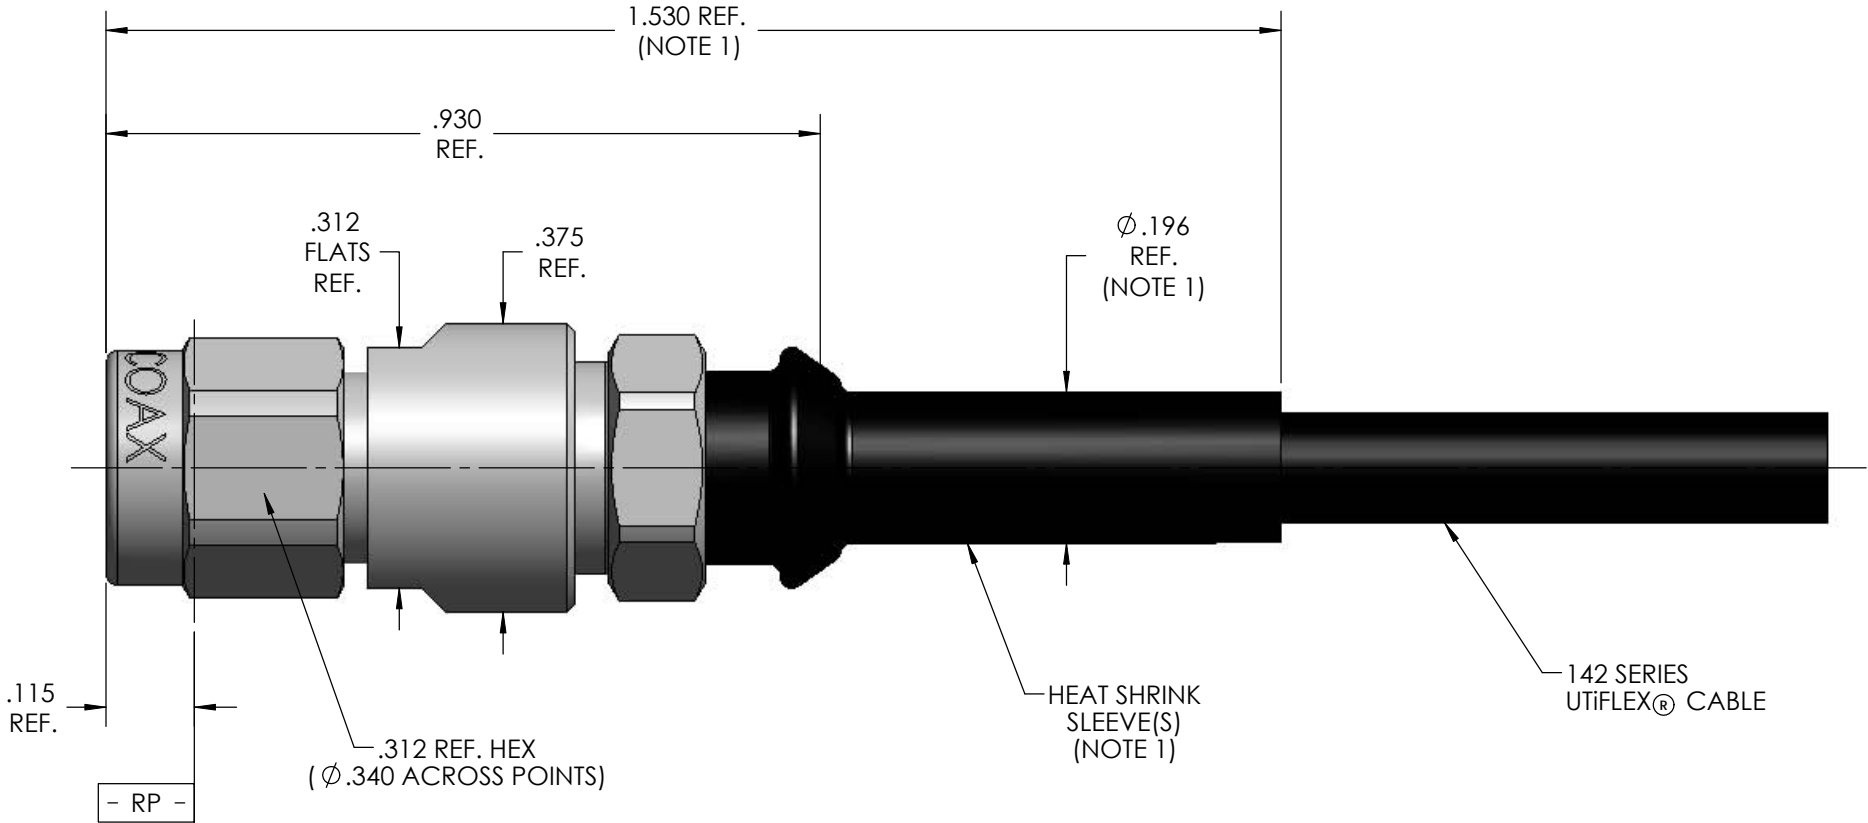

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.	INITIALS		DATE		<div>MICRO-COAX®</div> <div>Leading the way in transmission line solutions.</div> <div>Copyright Micro-Coax, Inc.</div>						
	DWN.	CCF	9/23/13								
	CHKD.										
	APPVD.										
TOLERANCES UNLESS OTHERWISE SPECIFIED			TITLE								
			2.92MM PLUG, 142 SERIES CABLE								
.XX	± .02		ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.			FSCM NO. 64639	SIZE B	SCALE 4:1	SHEET NO. 1 OF 1	DRAWING NO. SD903242	REV 1
.XXX	± .005										
.XXXX	± .0010										
ANGLES		±2°									

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.