

# Surface Mount RF Transformer

## TTCM4-4+

50Ω

0.5 to 400 MHz



### Maximum Ratings


Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

PRIMARY DOT	4
PRIMARY	6
PRIMARY CT	5
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2

### Outline Drawing

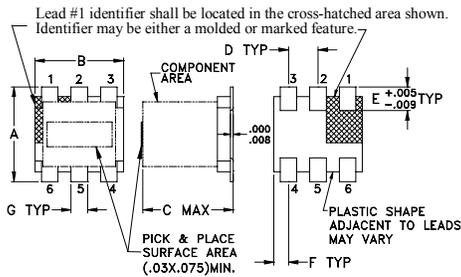


### PCB Land Pattern



### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

### Config. B

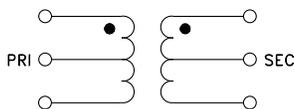

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- wideband, 0.5 to 400 MHz
- excellent amplitude (0.1 dB typ.) and phase unbalance (1° typ.)
- plastic base with solder plated leads
- aqueous washable

### Applications

- impedance matching

CASE STYLE: DB714

PRICE: \$2.29 ea. QTY (20)  
\$1.29 ea. QTY (100)

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

### Transformer Electrical Specifications


Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
4	0.5-400	0.5-400	1.3-160	5-100	1	1	0.1	0.1

\* Insertion Loss is referenced to mid-band loss, 0.65 dB typ.

### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
0.50	1.27	15.05	0.02	0.21
1.00	1.02	16.86	0.02	0.16
1.50	0.90	17.24	0.02	0.11
2.00	0.82	17.30	0.03	0.04
16.00	0.64	16.47	0.04	0.12
100.00	0.82	16.33	0.01	0.43
160.00	0.82	16.19	0.10	0.50
200.00	1.05	14.91	0.16	0.34
300.00	1.46	12.61	0.38	0.93
400.00	1.90	10.01	0.61	4.56

TTCM4-4+  
INSERTION LOSS

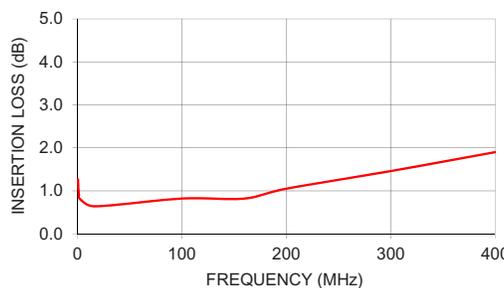

TTCM4-4+  
INPUT RETURN LOSS

