


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

2X TYPE SMA FEMALE
PER MIL-C-39012

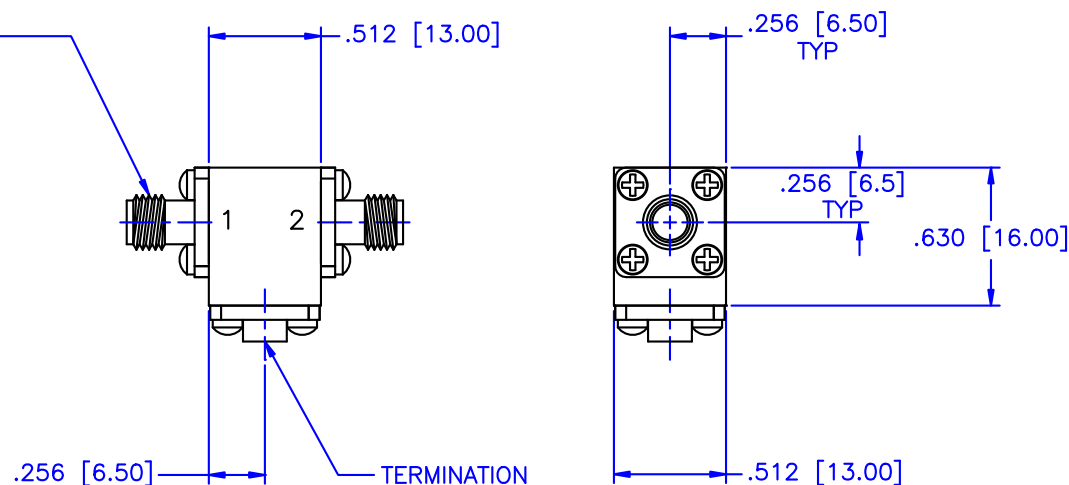

SPECIFICATIONS:

Frequency Range: 22.5–24.5 GHz

Isolation: 20dB Min.

Insertion loss: 0.80dB Max.

VSWR: 1.50:1 Max.

Operating Temperature: –54°C to +85°C

Circulator Power:

Average: 25 Watts

Peak: 250 Watts

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-17-2009		DRAWING TITLE: COAXIAL ISOLATOR
APPROVED: T. Nguyen		DATE: 03-17-2009		PART NO. IS-98
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: 0D2L5	SIZE: N/A	REV: N/A
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		DWG. NO. 84319