



12 dB Fixed Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts Up To 12.4 GHz

TECHNICAL DATA SHEET

PE7047-12

12 dB Fixed Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts Up To 12.4 GHz

Configuration

Design Fixed, Bidirectional Attenuator

Connector 1 N Male
Connector 2 N Female

Body Material and Plating Passivated Stainless Steel

Electrical Specifications

Frequency Range, GHz
Impedance, Ohms
50
Attenuation Value, dB
Maximum Input Power, Watts
2
DC to 12.4
Impedance, Ohms
50
12

Frequency 1

Range, GHz DC to 4
VSWR 1.15:1
Attenuation Accuracy, dB ± 0.5

Frequency 2

 Range, GHz
 4 to 8

 VSWR
 1.2:1

 Attenuation Accuracy, dB
 ± 0.5

Frequency 3

 Range, GHz
 8 to 12.4

 VSWR
 1.25:1

 Attenuation Accuracy, dB
 ± 0.5

Mechanical Specifications

Temperature

Operating Range, deg C -65 to +125

Size

 Length, in [mm]
 1.765 [44.83]

 Width, in [mm]
 0.8 [20.32]

Connector 1

Type N Male
Connector Specification MIL-STD-348
Contact Material and Plating Beryllium Copper, Gold
Coupling Nut Material and Plating Brass, Nickel
Body Material and Plating Passivated Stainless Steel

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 12 dB Fixed Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts Up To 12.4 GHz PE7047-12

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.







12 dB Fixed Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts Up To 12.4 GHz

TECHNICAL DATA SHEET

PE7047-12

Connector 2

Type Connector Specification Contact Material and Plating Body Material and Plating N Female MIL-STD-348 Beryllium Copper, Gold Passivated Stainless Steel

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant
Yes

Plotted and Other Data

Notes: Values at 25 °C, sea level

12 dB Fixed Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts Up To 12.4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 12 dB Fixed Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts Up To 12.4 GHz PE7047-12

URL: http://www.pasternack.com/12db-fixed-n-male-n-female-2-watts-attenuator-pe7047-12-p.aspx


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.




ISO 9001: 2008 Registered

PE7047-12 CAD Drawing

12 dB Fixed Attenuator, N Male To N Female Passivated Stainless Steel Body Rated To 2 Watts Up To 12.4 GHz

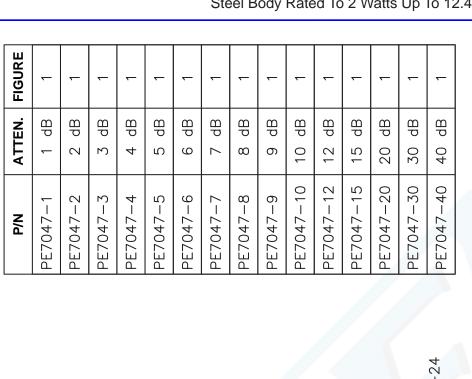

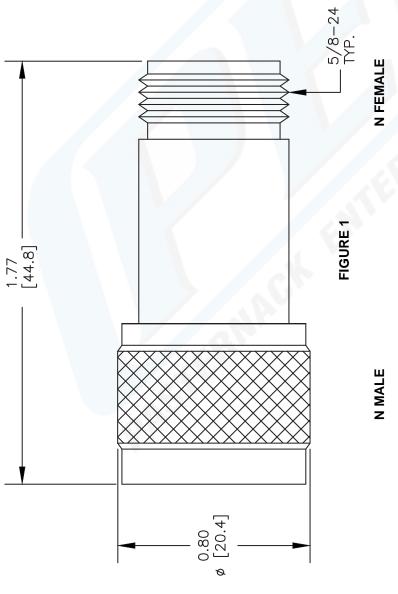

DWG TITLE DWG TITLE 1 IN ESS	PE7047 2. ALL SPEC	FSCM NO. 53919 CAD FILE
NOTES: 1. UNESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].		.E 030513
		SCALE N/A
		SIZE A
ANY TIME.		XXXX