


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

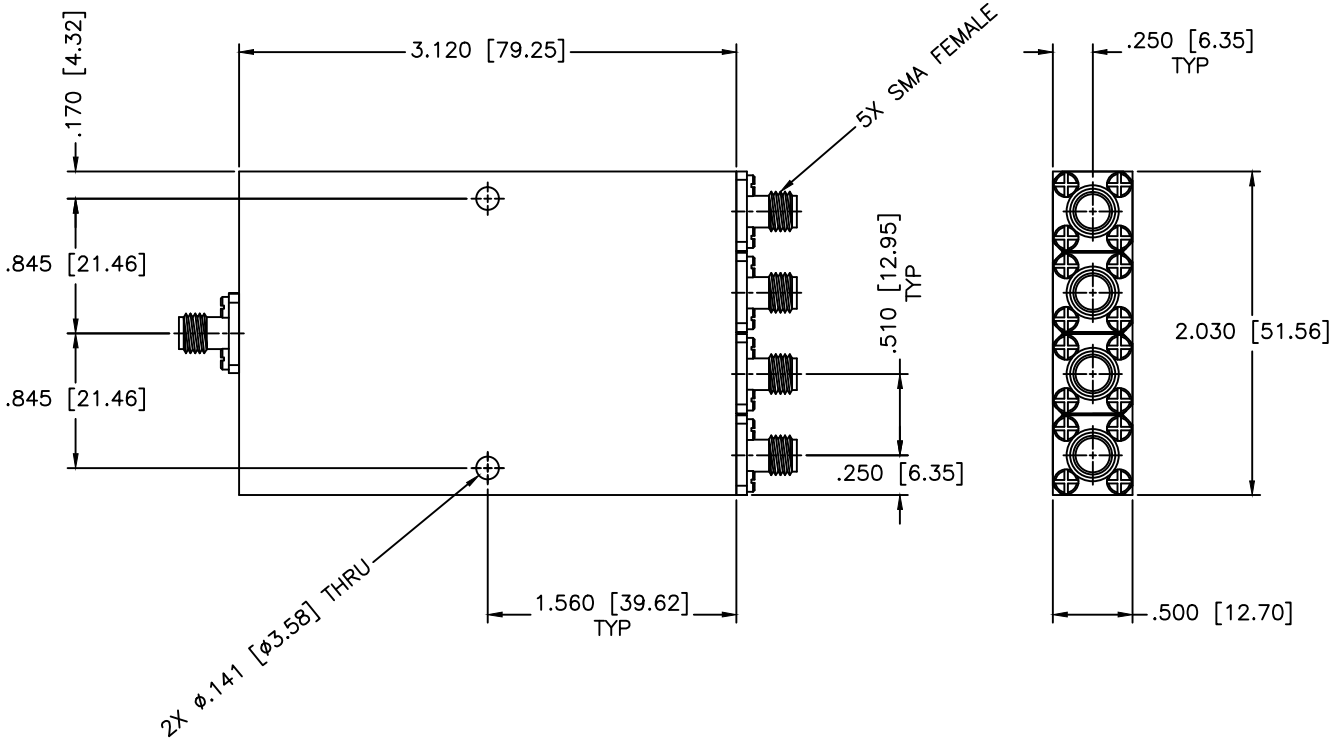

SPECIFICATIONS

Frequency Range: 2–26.5 GHz
 Insertion Loss: 2.7dB Max.
 Isolation: 17dB Min.
 VSWR: 1.55:1 Max.
 Amplitude Balance: ±0.6dB Max.
 Phase Balance: ±7 Deg. Max.
 Power Average: 10 Watts
 Operating Temperature: –32°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 06-14-2010
APPROVED: T. Nguyen	DATE: 06-14-2010



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
4-WAY POWER DIVIDER

PART NO.
PS4-15

CAGE CODE:	SIZE:	REV:	DWG. NO.
OD2L5	N/A	B	84910



DO NOT SCALE THE DRAWING