


剥线尺寸
stripping dimension

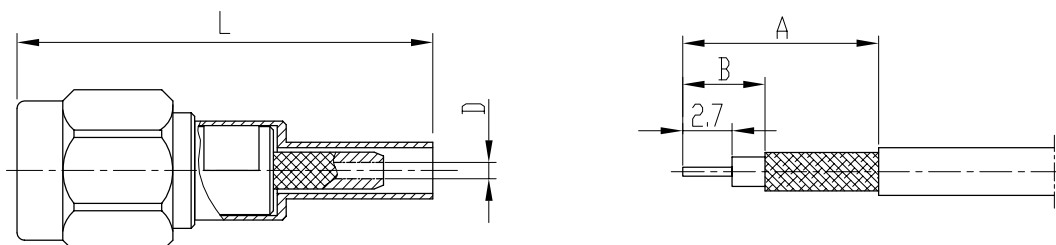

产品型号 type	电缆型号 type cable	D	L	A	B	线夹 crimp ferrule
SMA-J2	SFF-50-1、RG178/U	ø0.9	22.7	10.7	4.5	
SMA-J3B	SFF-50-1.5-1、RG316/U	ø1.6	23.5	10.7	4.5	
SMA-J4A	SFF-50-2-2	ø2.3	25	10.7	4.5	gold plated 镀金
SMA-J4B						
SMA-J5C	SFF-50-3-1、SYV-50-3	ø3.1	27.5	12.7	4.78	

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
 - Center conductor: ≤3.0 mΩ
 - Out conductor: ≤2.0 mΩ
- Insulation resistance: ≥5000MΩ
- Insulator withstanding: 1000V
- VSWR: ≤1.4
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
 - 中心导体: ≤3.0 mΩ
 - 外导体: ≤2.0 mΩ
- 绝缘电阻: ≥5000MΩ
- 介质耐压: 1000V
- 电压驻波比: ≤1.4
- 插拔次数: 500次

Application: MIL-C-39012/55D


执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
 - Male: brass, gold plated
- Body: brass, gold plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
 - 插针: 黄铜, 镀金
- 壳体: 黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

	SCALE		SMA-J2 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	2.5:1			
NAME	DATE			
DRAWN				
CHECKED				
APPROVED				

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.