


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

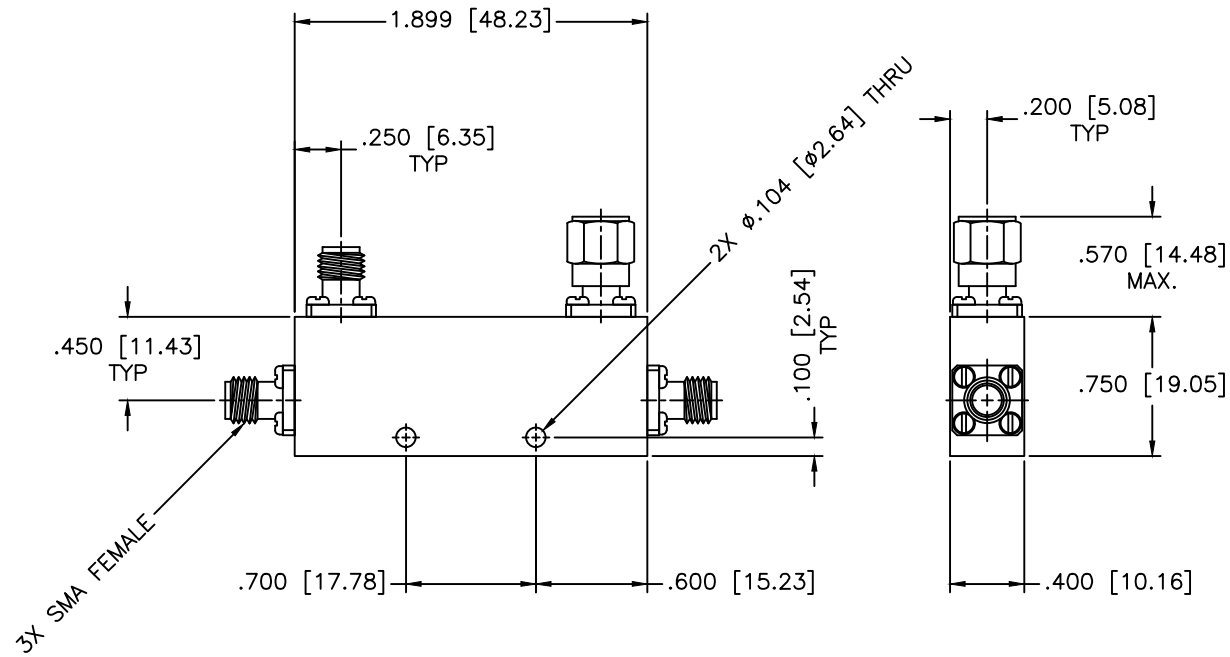

SPECIFICATIONS

Frequency Range: 1–2 GHz
Coupling: 20 ± 1.25 dB
Frequency Sensitivity: ± 0.75 dB
Insertion Loss: 0.2 dB Max.
Directivity: 25 dB Min.
VSWR: 1.10:1 Max.
Power Incident, Reflected: 50W, 5W, 3kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luethamhan		DRAWING TITLE: DIRECTIONAL COUPLER		
DATE: 04-16-1998		PART NO. C2-20		
APPROVED: T. Nguyen		DATE: 04-16-1998		
CAGE CODE: OD2L5		SIZE: A REV: N/A DWG NO. 80376		
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		