





This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

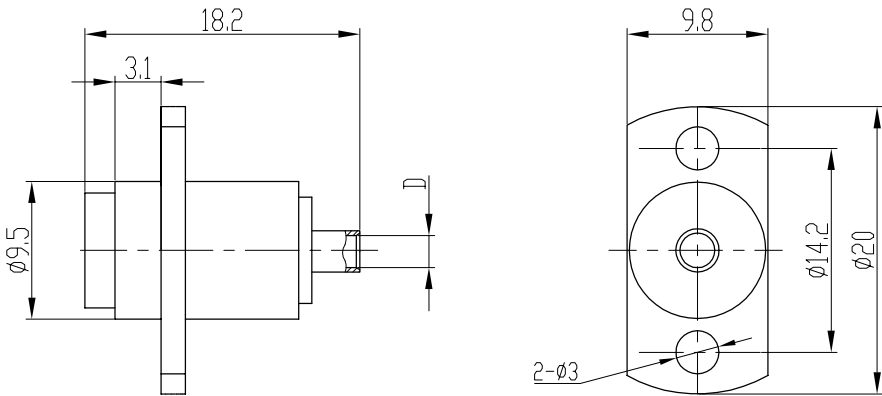

剥线尺寸
stripping dimension



产品型号 type	D	配接电缆 cable type	备注 remark
BMA-KFB2	Ø2.2	SFT-50-2-1、RG405/U	
BMA-KFB3	Ø3.6	SFT-50-3-1、RG402/U	法兰体为不锈钢 flanged body is stainless steel
BMA-KFB3G	Ø3.6		

Electrical Characteristics:

- 1.Characteristic Impedance: 50 Ω
- 2.Frequency range: DC~4Ghz
- 3.Contact resistance
Center conductor: ≤3.0 mΩ
Out conductor: ≤2.0 mΩ
4. Insulation resistance: ≥5000MΩ
5. Insulator withstanding: 750V
6. VSWR: ≤1.35
- 7.Durability: 1000cycles

Application: IEC 61169-33

Material&Finishing

- 1.Center contact :
Female:beryllium copper, gold plated
- 2.Bodies:brass, gold plated
3. Insulators:PTFE


主要性能指标:

- 1.特性阻抗: 50 Ω
2. 频率范围: DC~4Ghz
3. 接触电阻:
中心导体: ≤3.0 mΩ
外导体: ≤2.0 mΩ
4. 绝缘电阻: ≥5000MΩ
5. 介质耐压: 750V
6. 电压驻波比: ≤1.35
7. 插拔次数: 1000次

执行标准: IEC 61169-33

材料和镀层

1. 中心接触件:
插孔: 铍青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

		SCALE		BMA-KFB2 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table><tr><td>FRACTIONS</td><td>DECIMALS</td><td>ANGLES</td></tr><tr><td>.X± .15</td><td></td><td>±1°</td></tr><tr><td>.XX± .05</td><td></td><td></td></tr><tr><td>.XXX±</td><td></td><td></td></tr></table>	FRACTIONS	DECIMALS	ANGLES	.X± .15		±1°	.XX± .05			.XXX±		
		FRACTIONS	DECIMALS			ANGLES											
.X± .15		±1°															
.XX± .05																	
.XXX±																	
2.5:1																	
	NAME	DATE															
DRAWN																	
CHECKED																	
APPROVED																	

西安富士达科技股份有限公司

XI'AN FORSTAR S&T CO.,LTD.

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.