


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

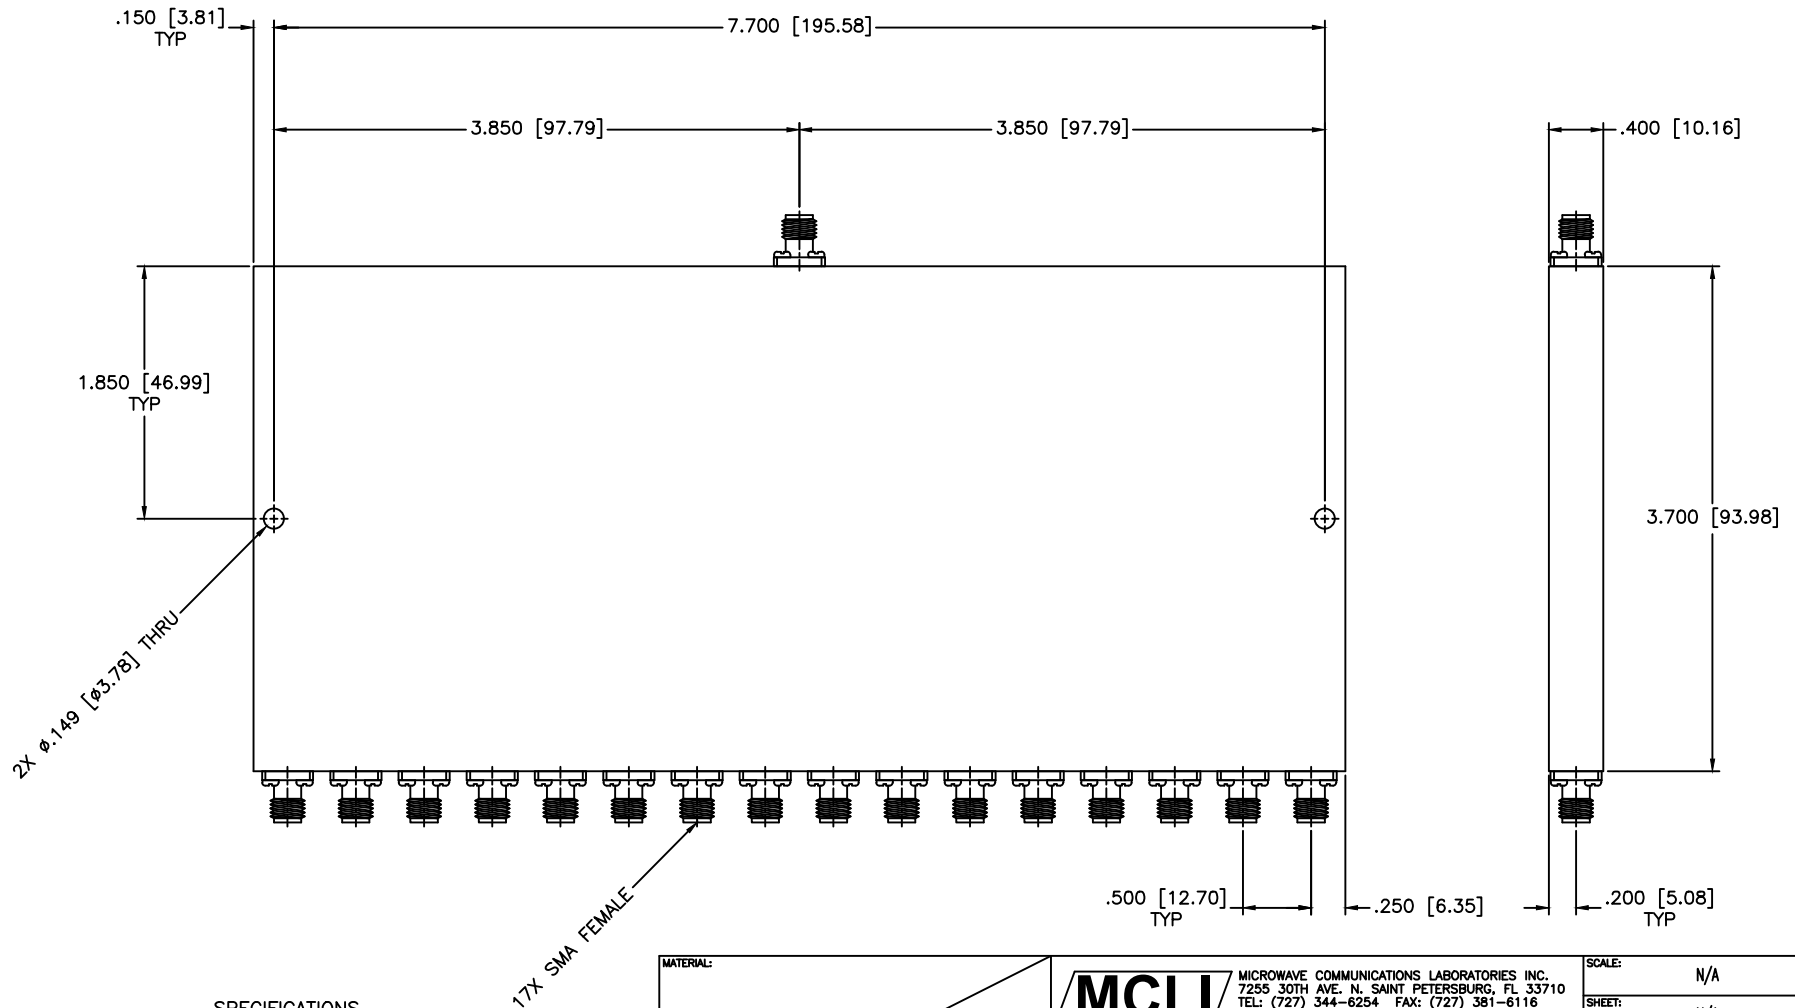

SPECIFICATIONS

Frequency Range: 6–18 GHz
 VSWR: 1.65:1 Max.
 Amplitude Balance: ± 1.0 dB Max.
 Phase Balance: ± 5 Deg. Max.
 Insertion Loss: 5.8dB Max.
 Isolation: 14dB Min.
 Power: 10W (Load vswr @ 1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		16-WAY POWER DIVIDER			
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.			
		PS16-16			
DRAWN:	DATE:	CAGE CODE:	SIZE:	REV:	DWG NO.
Paiboon Luekhamhan	08-10-2010	OD2L5	A	N/A	85035
APPROVED:	DATE:	DO NOT SCALE THE DRAWING			
T. Nguyen	08-10-2010				

