



ULTRA WIDE BAND 1630-2630MHz CIRCULATOR RFLC301G16G26

1.0	Mechanical Specifications	
1.1	Coaxial Connector	SMA-F or N-F
1.2	External Body Finish	Nickle Plated
1.3	Rotation	Clockwise / Counter-clockwise

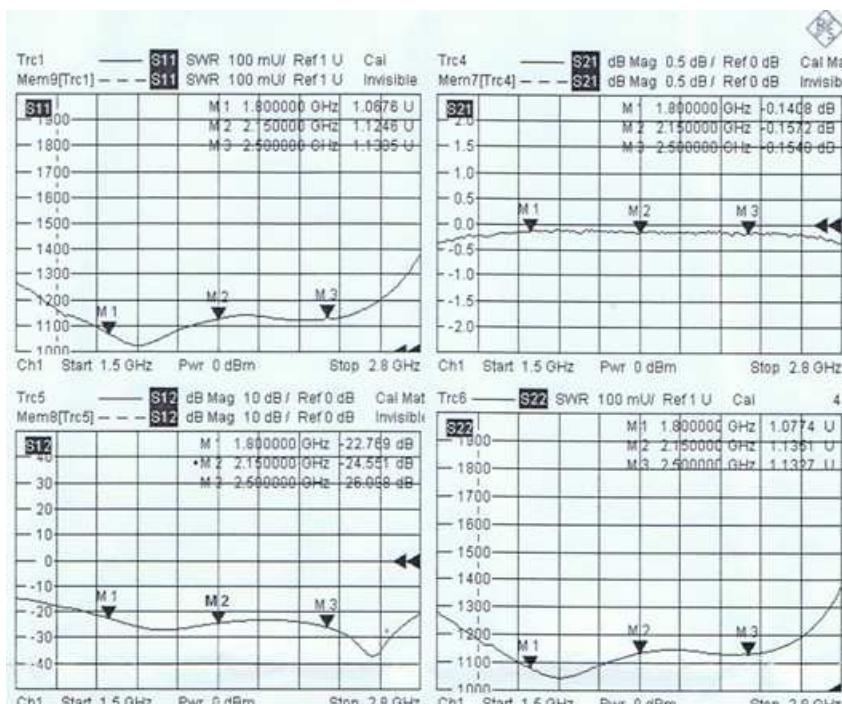

PN	Frequency (MHz)	Insertion loss (dB)	Isolation (dB) min	VSWR (max)	Forward Power (CW)	Reverse Power (CW)
RFLC301G16G26	1630-2630	0.4	20	1.25	100	n/a

* All spec. above in 25C degree only.

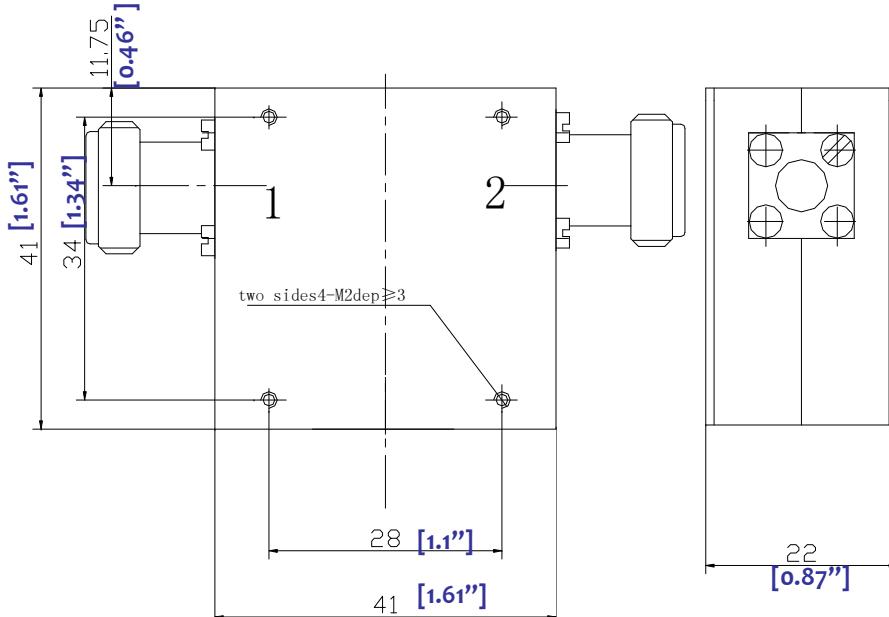

2.0	Environment specifications	
2.1	Opt. Temp.	-10°C~+80°C
2.2	Storage Temp.	-40°C~+85°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE 1 OF 1	DATE JAN 8 th 2003
	DESIGN

PROPRIETARY INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE
PROPERTY OF WRUTUBG B.V. AND IS EXPRESSLY
AUTHORIZED IN WRUTUBG B.V. RF-LAMBDA. THE HOLDER OF
THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED
HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE
WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION
OF ALL THIRD PARTIES AND SHALL USE SAME FOR
OPERATING AND MAINTENANCE PURPOSES ONLY.

RFLC301G16G26
ULTRA WIDE BAND
CIRCULATOR

www.rflambda.com

www.mambda.com		Do2-12	
RF-LAMBDA	SIZE LT	SHEETS 1	OF 1
N	P	Q	R