REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

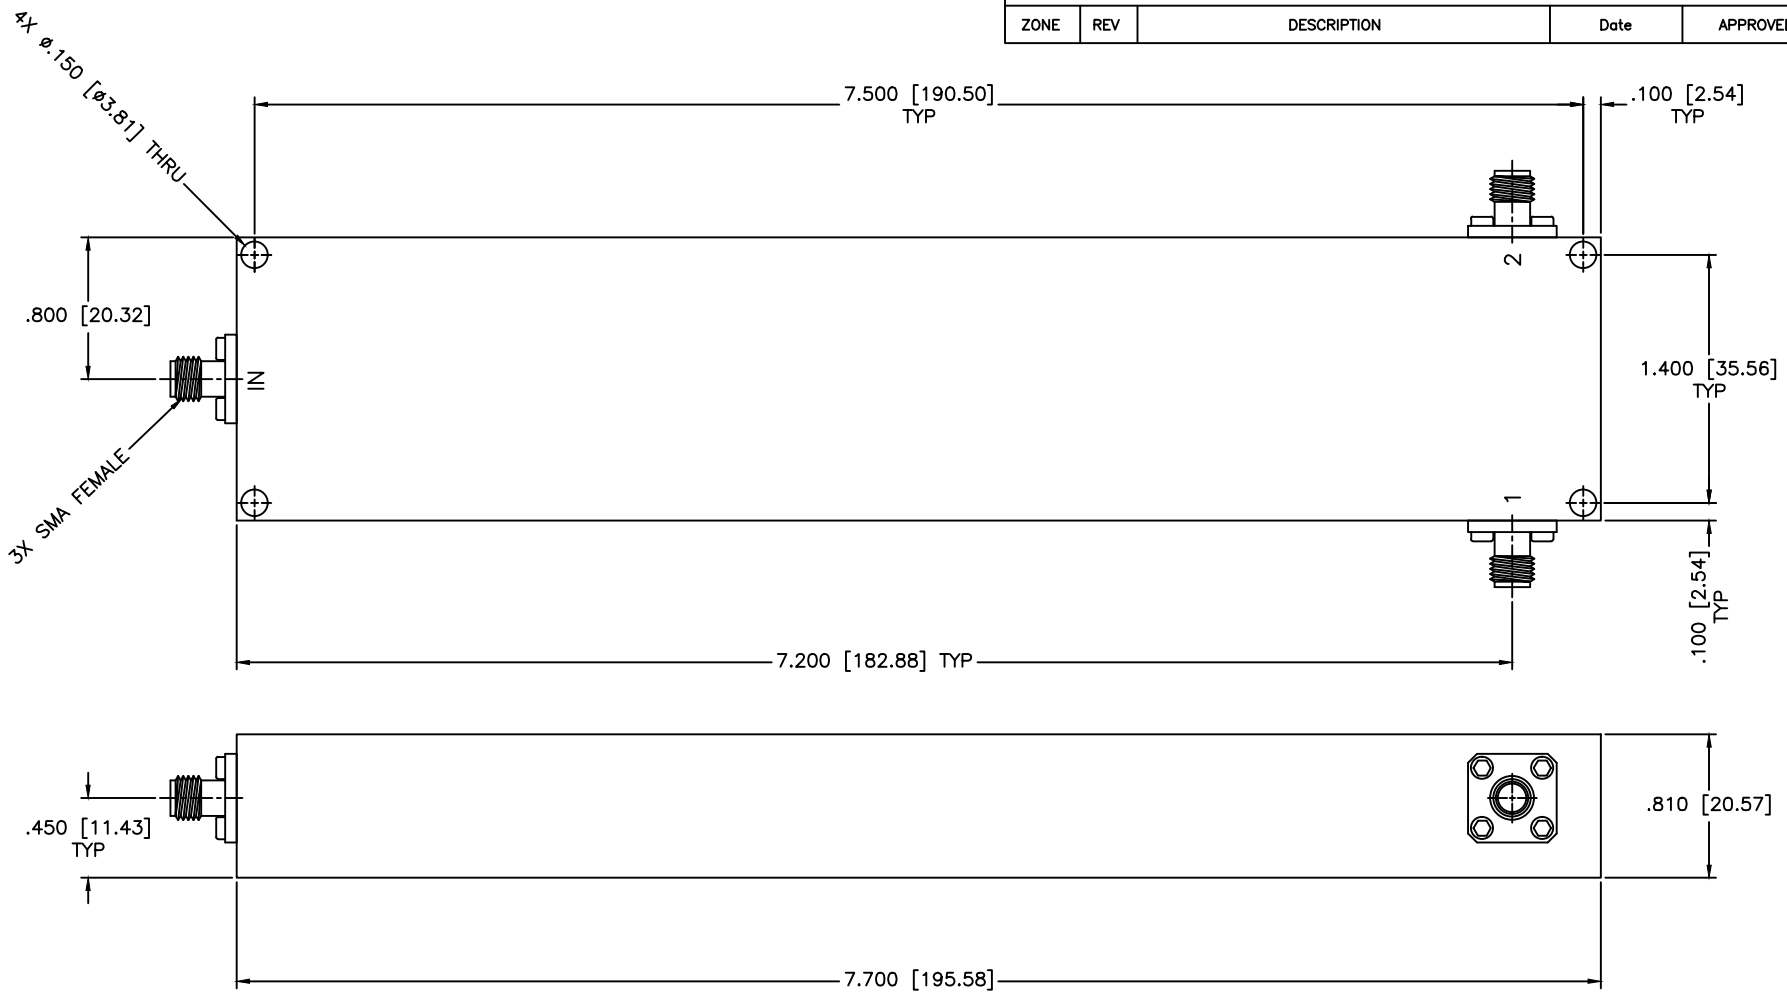

SPECIFICATIONS

Frequency Range:	200–2500 MHz
Insertion Loss:	0.65dB Max.
Isolation:	15dB Min.
Phase Balance:	±5 Deg. Max.
Amplitude Balance:	±0.2dB Max.
VSWR:	1.40:1 Max.
Input Power:	200 W CW

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE: 2-WAY POWER DIVIDER

PART NO. PLH2-40

DRAWN: Paiboon Luekhamhan — DATE: 02-01-2011

APPROVED: T. Nguyen — DATE: 02-01-2011

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

CAGE CODE: 0D2L5 | SIZE: A | REV: N/A | DWG NO. 85301

DO NOT SCALE THE DRAWING