

SMB PLUG RG174 RG188 RG316

SC8841

SPECIFICATIONS




ELECTRICAL
FREQUENCY: 0-3 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.4:1 MAX @ 3GHZ

MECHANICAL
MATERIAL BODY: BRASS, Au PLATED, 3μ" MIN
CONTACTS: BeCu
CONTACT PLATING: Au 30μ" MIN
INSULATOR: TEFLON


INTERFACE: MIL-STD-348A

ROHS COMPLIANT

CRIMP SIZE REQUIRED: .138"(3.5) HEX CRIMP TOOL

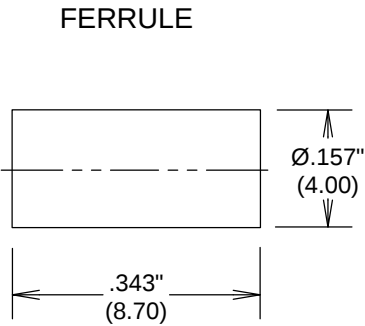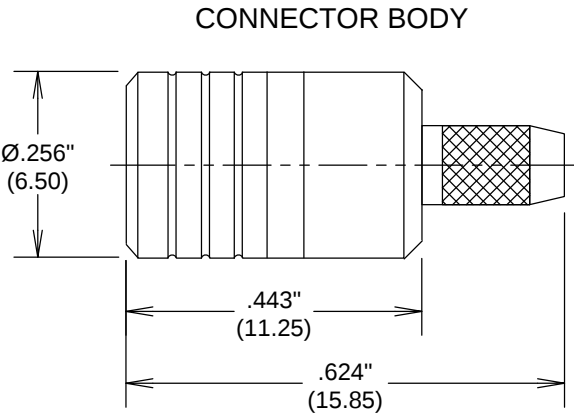

STRIPPING DIMENSIONS

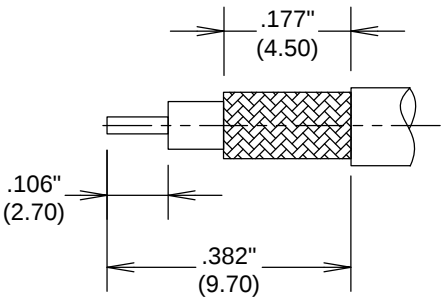

FAIRVIEW MICROWAVE INC.
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE			
SMB PLUG RG174 RG188 RG316			
SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC8841	
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical