


Frequency Synthesizer

SSN-2685A-119+

50Ω 2495 to 2690 MHz

The Big Deal

- Fractional N synthesizer
- Low phase noise and spurious
- Robust design and construction
- Very small size 0.60" x 0.60" x 0.138"



CASE STYLE: KJ1367

Product Overview

The SSN-2685A-119+ is a Frequency Synthesizer, designed to operate from 2495 to 2690 MHz for WiMAX application. The SSN-2685A-119+ is packaged in a metal case (size of 0.60" x 0.60" x 0.138") to shield against unwanted signals and noise.

Key Features

| Feature | Advantages |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low phase noise and spurious: <ul style="list-style-type: none">• Phase Noise: -97 dBc/Hz typ. @ 10 kHz offset• Step Size Spurious: -92 dBc typ.• Comparison Spurious: -99 dBc typ.• Reference Spurious: -92 dBc typ. | Low phase noise and spurious improve system EVM (Error Vector Magnitude). |
| Robust design and construction | To enhance the robustness of SSN-2685A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer. |
| Small size, 0.60" x 0.60" x 0.138" | The small size enables the SSN-2685A-119+ to be used in compact designs. |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 2495 to 2690 MHz

Features


- Fractional N synthesizer
- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+4.85V, VCC PLL=+3.2V)
- Small size 0.60" x 0.60" x 0.138"

Applications

- WiMAX

General Description

The SSN-2685A-119+ is a Frequency Synthesizer, designed to operate from 2495 to 2690 MHz for WiMAX application. The SSN-2685A-119+ is packaged in a metal case (size of 0.60" x 0.60" x 0.138") to shield against unwanted signals and noise. To enhance the robustness of SSN-2685A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.



CASE STYLE: KJ1367

PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Simplified Schematic



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M129764
EDR-8858/3F1
SSN-2685A-119+
Category-A2
RAV
101206
Page 2 of 13

Electrical Specifications (over operating temperature -40°C to +85°C)

| Parameters | Test Conditions | Min. | Typ. | Max. | Units |
|-------------------------------------|----------------------------|-------------------------|-----------------------------------|-------|------------------|
| Frequency Range | - | 2495 | - | 2690 | MHz |
| Step Size | - | - | 250 | - | kHz |
| Comparison Frequency | - | - | 26 | - | MHz |
| Settling Time | Within ± 1 kHz | - | 25 | 50 | mSec |
| Output Power | - | 0 | +3 | +6 | dBm |
| SSB Phase Noise | @ 100 Hz offset | - | -80 | - | dBc/Hz |
| | @ 1 kHz offset | - | -88 | -84 | |
| | @ 10 kHz offset | - | -96 | -91 | |
| | @ 100 kHz offset | - | -123 | -118 | |
| | @ 1 MHz offset | - | -143 | -138 | |
| Integrated SSB Phase Noise | @ 1kHz to 10MHz | - | -50 | - | dBc |
| Step Size Spurious Suppression | Step Size 250 kHz | - | -80 | -68 | dBc |
| 0.5 Step Size Spurious Suppression | 0.5 Step Size 125 kHz | - | -75 | -67 | |
| Reference Spurious Suppression | Ref. Freq. 52 MHz | - | -85 | -73 | |
| Comparison Spurious Suppression | Comp. Freq. 26 MHz | - | -94 | -87 | |
| Non - Harmonic Spurious Suppression | - | - | -90 | - | |
| Harmonic Suppression | - | - | -33 | -26 | V |
| VCO Supply Voltage | +4.85 | +4.75 | +4.85 | +5.25 | |
| PLL Supply Voltage | +3.20 | +3.10 | +3.20 | +3.30 | mA |
| VCO Supply Current | - | - | 45 | 52 | |
| PLL Supply Current | - | - | 18 | 24 | |
| Reference Input (External) | Frequency | 52 (square wave) | - | 52 | MHz |
| | Amplitude | 1 | - | 1 | V _{P-P} |
| | Input impedance | - | - | 100 | K Ω |
| | Phase Noise @ 1 kHz offset | - | - | -135 | dBc/Hz |
| RF Output port Impedance | - | - | 50 | - | Ω |
| Input Logic Level | Input high voltage | - | 2.65 | - | V |
| | Input low voltage | - | - | 0.60 | V |
| Digital Lock Detect | Locked | - | 2.70 | - | V |
| | Unlocked | - | - | 0.40 | V |
| Frequency Synthesizer PLL | - | ADF4153 | | | |
| PLL Programming | - | 3-wire serial 3.2V CMOS | | | |
| Register Map @ 2690 MHz | R0_Register | - | (MSB) 110011100000011000000 (LSB) | | |
| | R1_Register | - | (MSB) 101001000000110100001 (LSB) | | |
| | R2_Register | - | (MSB) 111100010 (LSB) | | |
| | R3_Register | - | (MSB) 1111000111 (LSB) | | |

Absolute Maximum Ratings

| Parameters | Ratings |
|------------------------------------------|----------------------------|
| VCO Supply Voltage | 5.8V |
| PLL Supply Voltage | 4.0V |
| VCO Supply Voltage to PLL Supply Voltage | -0.3V to +5.8V |
| Reference Frequency Voltage | -0.3Vmin, VCC PLL +0.3Vmax |
| Data, Clock, LE Levels | -0.3Vmin, VCC PLL +0.3Vmax |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +100°C |

Permanent damage may occur if any of these limits are exceeded



Typical Performance Data

| FREQUENCY (MHz) | POWER OUTPUT (dBm) | | | VCO CURRENT (mA) | | | PLL CURENT (mA) | | |
|--------------------|-----------------------|-------|-------|---------------------|-------|-------|--------------------|-------|-------|
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| 2495.0 | 3.12 | 2.48 | 1.95 | 44.54 | 46.02 | 46.88 | 14.73 | 16.09 | 18.68 |
| 2506.5 | 3.45 | 2.76 | 2.23 | 44.55 | 46.06 | 46.90 | 15.34 | 16.73 | 19.33 |
| 2528.0 | 3.73 | 3.37 | 2.60 | 44.62 | 46.09 | 46.96 | 15.02 | 16.40 | 18.98 |
| 2549.5 | 3.79 | 3.24 | 2.73 | 44.73 | 46.17 | 47.07 | 14.75 | 16.14 | 18.69 |
| 2571.0 | 3.82 | 3.27 | 2.75 | 44.78 | 46.21 | 47.10 | 14.95 | 16.34 | 18.90 |
| 2592.5 | 3.86 | 3.31 | 2.55 | 44.74 | 46.21 | 47.07 | 15.19 | 16.58 | 19.16 |
| 2614.0 | 4.08 | 3.49 | 2.60 | 44.72 | 46.11 | 47.07 | 15.29 | 16.69 | 19.26 |
| 2635.5 | 4.31 | 3.64 | 2.81 | 44.63 | 46.02 | 47.02 | 15.27 | 16.68 | 19.24 |
| 2657.0 | 4.03 | 3.30 | 2.66 | 44.49 | 45.95 | 46.96 | 15.08 | 16.49 | 19.05 |
| 2678.5 | 3.64 | 3.02 | 2.41 | 44.33 | 45.84 | 46.90 | 14.63 | 16.02 | 18.55 |
| 2690.0 | 3.46 | 2.84 | 2.26 | 44.22 | 45.76 | 46.87 | 15.29 | 16.70 | 19.27 |

| FREQUENCY (MHz) | HARMONICS (dBc) | | | | | |
|--------------------|-----------------|--------|--------|--------|--------|--------|
| | F2 | | | F3 | | |
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| 2495.0 | -33.01 | -35.24 | -35.13 | -54.74 | -51.63 | -45.19 |
| 2506.5 | -36.30 | -34.24 | -36.68 | -53.29 | -52.22 | -46.07 |
| 2528.0 | -36.32 | -38.74 | -37.14 | -53.11 | -55.78 | -46.34 |
| 2549.5 | -36.48 | -36.95 | -38.19 | -50.05 | -54.38 | -49.38 |
| 2571.0 | -37.33 | -37.11 | -38.53 | -52.43 | -54.39 | -53.01 |
| 2592.5 | -44.03 | -41.04 | -41.10 | -53.38 | -50.14 | -52.53 |
| 2614.0 | -42.78 | -43.04 | -41.39 | -52.33 | -49.07 | -54.08 |
| 2635.5 | -43.08 | -41.41 | -44.16 | -49.71 | -46.19 | -51.02 |
| 2657.0 | -44.71 | -42.25 | -43.44 | -46.84 | -43.96 | -48.66 |
| 2678.5 | -42.03 | -41.12 | -43.61 | -43.99 | -43.01 | -46.82 |
| 2690.0 | -42.19 | -41.03 | -43.36 | -42.14 | -42.44 | -45.05 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS | | | | |
|--------------------|--------------------------------|--------|--------|---------|---------|
| | +25°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 2495.0 | -84.58 | -90.07 | -99.74 | -126.24 | -146.60 |
| 2506.5 | -86.75 | -91.04 | -98.30 | -125.61 | -145.83 |
| 2528.0 | -86.15 | -88.69 | -98.36 | -125.77 | -146.54 |
| 2549.5 | -86.80 | -91.21 | -98.16 | -125.73 | -146.02 |
| 2571.0 | -84.13 | -92.22 | -97.76 | -126.37 | -146.66 |
| 2592.5 | -89.22 | -88.97 | -97.24 | -125.97 | -145.92 |
| 2614.0 | -84.12 | -90.43 | -96.62 | -125.08 | -145.85 |
| 2635.5 | -85.67 | -91.71 | -96.69 | -124.70 | -145.40 |
| 2657.0 | -86.43 | -88.63 | -97.24 | -124.71 | -145.19 |
| 2678.5 | -86.15 | -90.44 | -96.19 | -124.29 | -143.50 |
| 2690.0 | -88.16 | -89.40 | -97.49 | -123.97 | -144.35 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS | | | | |
|--------------------|--------------------------------|--------|--------|---------|---------|
| | -45°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 2495.0 | -86.61 | -93.31 | -99.39 | -127.74 | -148.34 |
| 2506.5 | -86.48 | -92.40 | -98.59 | -126.33 | -147.54 |
| 2528.0 | -87.00 | -89.96 | -97.95 | -126.84 | -147.88 |
| 2549.5 | -86.74 | -90.78 | -97.70 | -127.16 | -147.99 |
| 2571.0 | -86.10 | -89.58 | -97.81 | -127.38 | -148.28 |
| 2592.5 | -90.61 | -92.05 | -97.54 | -126.77 | -148.47 |
| 2614.0 | -86.33 | -91.12 | -97.75 | -127.13 | -148.41 |
| 2635.5 | -84.64 | -90.68 | -97.41 | -126.96 | -148.03 |
| 2657.0 | -84.91 | -89.85 | -97.86 | -126.10 | -147.26 |
| 2678.5 | -85.92 | -90.57 | -97.70 | -125.93 | -146.89 |
| 2690.0 | -87.61 | -89.26 | -97.56 | -125.63 | -146.39 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS | | | | |
|--------------------|--------------------------------|--------|--------|---------|---------|
| | +85°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 2495.0 | -87.68 | -90.49 | -97.74 | -123.90 | -144.08 |
| 2506.5 | -87.54 | -90.47 | -97.51 | -123.54 | -142.96 |
| 2528.0 | -82.71 | -91.45 | -97.26 | -123.26 | -143.49 |
| 2549.5 | -84.32 | -88.58 | -96.95 | -123.82 | -143.86 |
| 2571.0 | -83.73 | -90.41 | -96.75 | -123.64 | -144.26 |
| 2592.5 | -84.62 | -89.88 | -96.47 | -123.14 | -143.89 |
| 2614.0 | -84.59 | -90.60 | -96.68 | -123.22 | -143.93 |
| 2635.5 | -84.51 | -90.88 | -96.04 | -123.23 | -143.26 |
| 2657.0 | -83.63 | -89.50 | -95.69 | -122.36 | -142.95 |
| 2678.5 | -82.76 | -88.25 | -95.50 | -122.06 | -142.37 |
| 2690.0 | -84.16 | -89.32 | -95.24 | -121.79 | -142.07 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

| COMPARISON SPURIOUS ORDER | COMPARISON SPURIOUS @ Fcarrier 2495MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @ Fcarrier 2593MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @ Fcarrier 2690MHz+(n*Fcomparison) (dBc) note 1 | | |
|---------------------------------|------------------------------------------------------------------------------|---------|---------|------------------------------------------------------------------------------|---------|---------|------------------------------------------------------------------------------|---------|---------|
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| -5 | -101.79 | -96.67 | -104.53 | -97.01 | -99.42 | -100.09 | -96.70 | -95.97 | -101.79 |
| -4 | -95.21 | -105.06 | -98.29 | -97.72 | -96.62 | -97.93 | -95.83 | -97.62 | -94.29 |
| -3 | -96.24 | -99.00 | -100.13 | -95.41 | -98.11 | -99.01 | -95.64 | -95.22 | -101.83 |
| -2 | -102.14 | -106.94 | -115.60 | -105.14 | -108.39 | -98.19 | -103.57 | -103.30 | -99.78 |
| -1 | -95.54 | -98.39 | -102.61 | -98.27 | -103.57 | -98.37 | -97.88 | -95.64 | -101.53 |
| 0 note 2 | - | - | - | - | - | - | - | - | - |
| +1 | -97.46 | -100.91 | -100.21 | -109.13 | -99.95 | -100.74 | -100.49 | -103.40 | -103.22 |
| +2 | -102.70 | -103.46 | -103.21 | -102.19 | -103.96 | -101.88 | -104.88 | -99.05 | -101.18 |
| +3 | -100.59 | -97.26 | -98.30 | -100.24 | -97.48 | -101.21 | -100.47 | -102.32 | -102.86 |
| +4 | -97.66 | -99.49 | -96.79 | -97.46 | -96.11 | -96.39 | -97.28 | -96.42 | -95.78 |
| +5 | -100.04 | -96.28 | -100.31 | -99.00 | -98.11 | -102.82 | -100.55 | -104.35 | -110.31 |

Note 1: Comparison frequency 26 MHz

Note 2: All spurs are referenced to carrier signal (n=0).

| REFERENCE SPURIOUS ORDER | REFERENCE SPURIOUS @ Fcarrier 2495MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @ Fcarrier 2593MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @ Fcarrier 2690MHz+(n*Freference) (dBc) note 3 | | |
|--------------------------------|----------------------------------------------------------------------------|---------|---------|----------------------------------------------------------------------------|---------|---------|----------------------------------------------------------------------------|---------|---------|
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| -5 | -107.10 | -108.44 | -101.70 | -98.22 | -105.35 | -107.73 | -113.33 | -103.42 | -99.50 |
| -4 | -111.16 | -96.93 | -100.54 | -95.75 | -95.36 | -90.94 | -97.42 | -97.20 | -92.73 |
| -3 | -84.78 | -88.69 | -92.05 | -95.59 | -94.70 | -95.96 | -93.64 | -96.29 | -95.52 |
| -2 | -94.62 | -105.23 | -98.73 | -97.53 | -96.54 | -97.76 | -95.83 | -97.19 | -94.36 |
| -1 | -101.72 | -106.93 | -118.89 | -104.49 | -106.00 | -98.82 | -103.88 | -102.65 | -99.22 |
| 0 note 4 | - | - | - | - | - | - | - | - | - |
| +1 | -102.86 | -103.65 | -102.76 | -102.55 | -102.80 | -100.78 | -106.02 | -98.95 | -100.89 |
| +2 | -97.37 | -99.65 | -96.67 | -97.22 | -96.41 | -96.03 | -97.31 | -96.62 | -95.71 |
| +3 | -83.69 | -87.15 | -91.39 | -93.02 | -94.80 | -95.97 | -96.38 | -95.72 | -97.83 |
| +4 | -101.88 | -100.96 | -105.76 | -94.48 | -93.26 | -91.40 | -103.65 | -99.46 | -95.49 |
| +5 | -106.86 | -103.24 | -121.25 | -106.95 | -111.32 | -105.75 | -103.89 | -102.20 | -99.62 |

Note 3: Reference frequency 52 MHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

| STEP SIZE SPURIOUS ORDER | 0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 2495MHz+(n*Fstep size) (dBc) note 5 | | | 0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 2593MHz+(n*Fstep size) (dBc) note 5 | | | 0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 2690MHz+(n*Fstep size) (dBc) note 5 | | |
|--------------------------------|-------------------------------------------------------------------------------------------|---------|---------|-------------------------------------------------------------------------------------------|---------|---------|-------------------------------------------------------------------------------------------|---------|---------|
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| -5.0 | -111.71 | -111.83 | -113.01 | -116.30 | -110.24 | -110.57 | -110.84 | -114.67 | -113.87 |
| -4.5 | -110.39 | -109.71 | -114.51 | -116.08 | -117.31 | -113.72 | -109.64 | -111.37 | -117.30 |
| -4.0 | -82.62 | -82.84 | -92.45 | -119.69 | -115.18 | -109.65 | -115.07 | -118.53 | -114.31 |
| -3.5 | -112.08 | -114.68 | -116.07 | -115.76 | -110.31 | -109.05 | -113.39 | -112.65 | -112.92 |
| -3.0 | -111.69 | -114.36 | -114.50 | -114.15 | -106.35 | -110.76 | -106.70 | -115.93 | -109.46 |
| -2.5 | -102.91 | -110.19 | -104.92 | -111.53 | -111.64 | -104.71 | -110.93 | -108.43 | -106.29 |
| -2.0 | -101.75 | -106.18 | -110.58 | -107.75 | -109.72 | -110.74 | -110.09 | -107.54 | -107.74 |
| -1.5 | -104.25 | -108.09 | -102.65 | -103.66 | -104.75 | -104.50 | -100.43 | -95.54 | -105.57 |
| -1.0 | -97.72 | -98.40 | -99.18 | -90.80 | -94.71 | -94.10 | -88.38 | -85.03 | -94.35 |
| -0.5 | -88.02 | -90.44 | -87.36 | -80.89 | -78.09 | -81.69 | -72.84 | -77.43 | -87.38 |
| 0 ^{note 6} | - | - | - | - | - | - | - | - | - |
| +0.5 | -87.41 | -87.89 | -88.58 | -79.61 | -79.74 | -81.25 | -72.82 | -76.95 | -84.97 |
| +1.0 | -101.35 | -100.96 | -99.49 | -90.30 | -96.82 | -98.38 | -88.43 | -84.01 | -94.10 |
| +1.5 | -103.11 | -108.48 | -102.75 | -105.44 | -104.66 | -106.01 | -101.41 | -94.99 | -105.50 |
| +2.0 | -103.54 | -103.40 | -111.92 | -107.11 | -106.18 | -111.90 | -107.95 | -108.75 | -108.49 |
| +2.5 | -100.99 | -106.39 | -103.70 | -112.66 | -110.92 | -104.93 | -110.67 | -110.68 | -104.98 |
| +3.0 | -111.21 | -113.36 | -116.98 | -111.72 | -108.15 | -113.78 | -111.61 | -113.27 | -110.15 |
| +3.5 | -112.28 | -117.17 | -116.60 | -112.07 | -109.24 | -111.50 | -114.92 | -113.51 | -114.72 |
| +4.0 | -82.84 | -83.35 | -92.18 | -116.37 | -114.32 | -113.20 | -115.73 | -115.12 | -111.68 |
| +4.5 | -108.60 | -114.25 | -118.34 | -118.72 | -112.99 | -117.81 | -113.32 | -115.06 | -114.84 |
| +5.0 | -106.76 | -111.47 | -114.60 | -118.09 | -111.30 | -115.80 | -111.29 | -111.35 | -115.36 |

Note 5: Step size 250 kHz

Note 6: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661






The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Curves

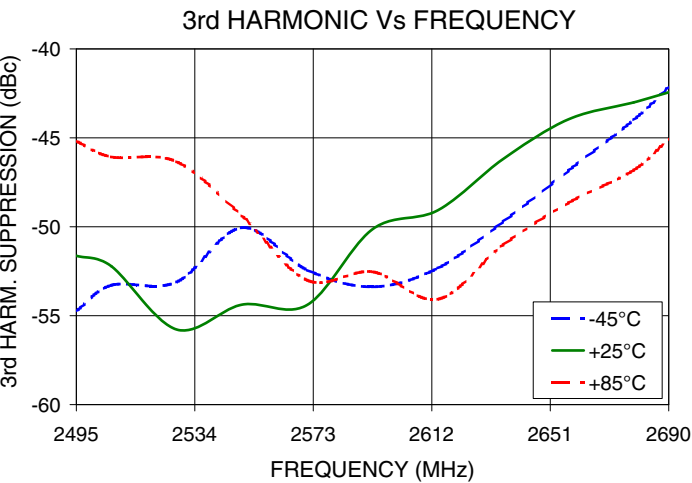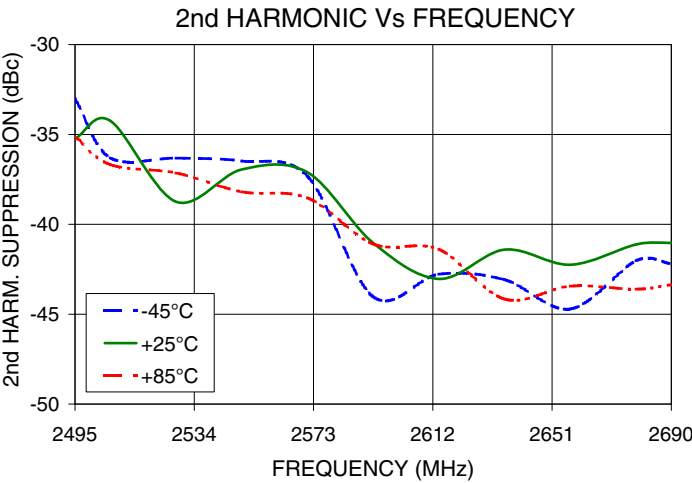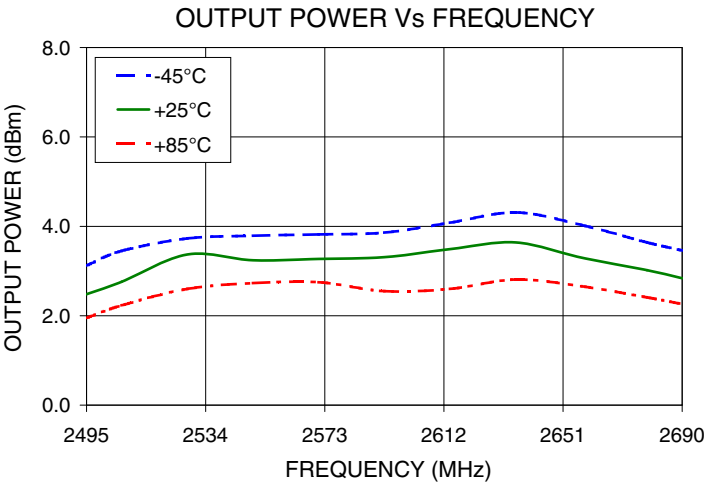

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.


PHASE NOISE @ 100Hz offset

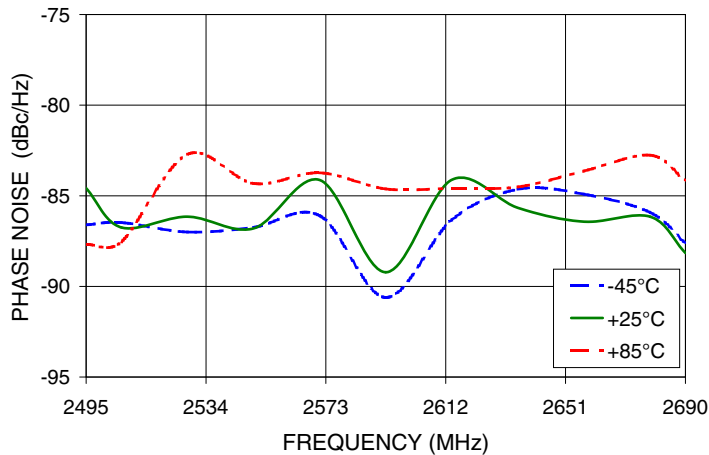


PHASE NOISE @ 1kHz offset

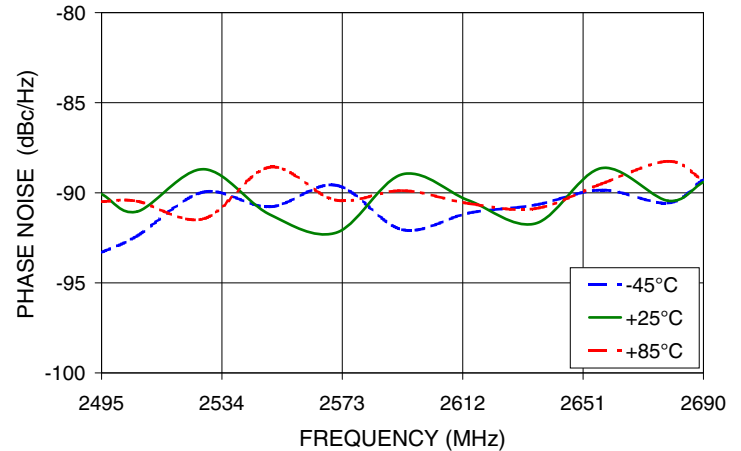


PHASE NOISE @ 10kHz offset

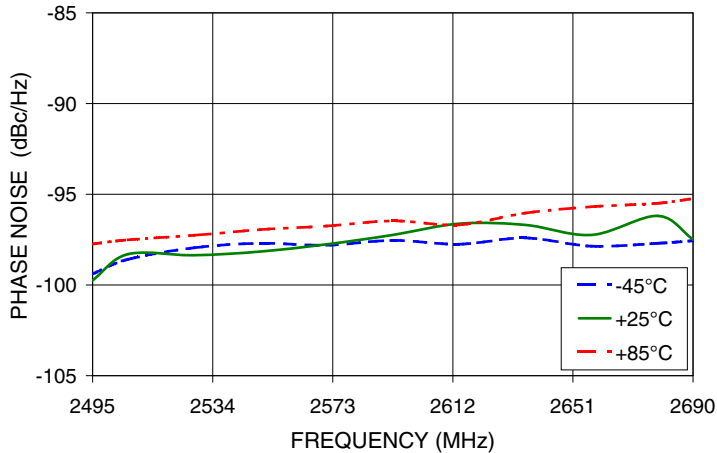

PHASE NOISE @ 100kHz offset

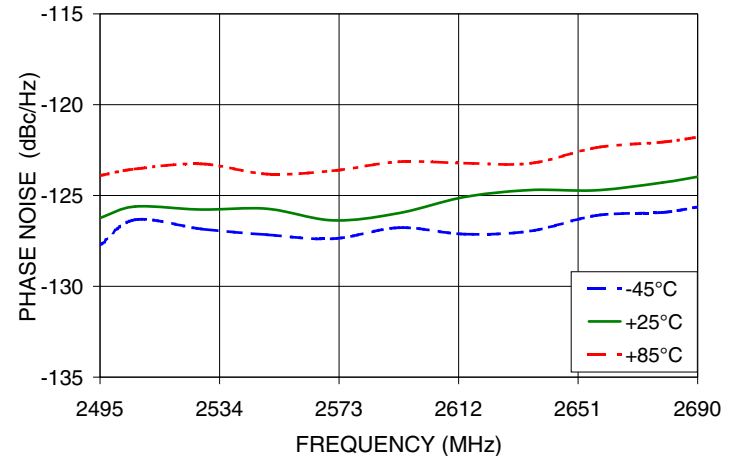

PHASE NOISE @ 1MHz offset

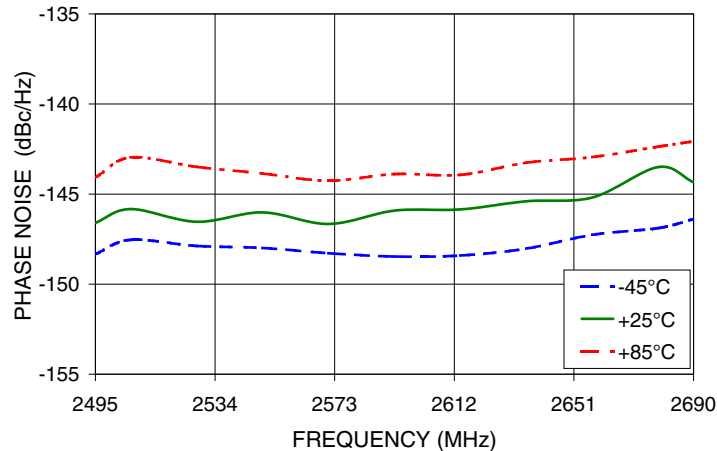







IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661






The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

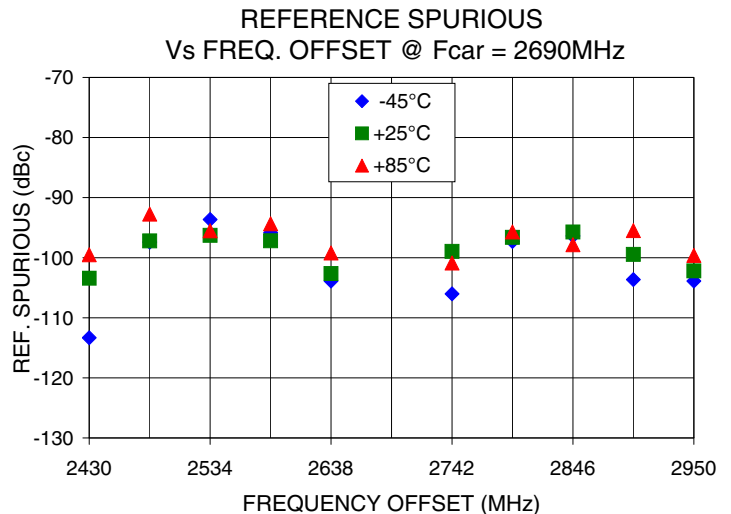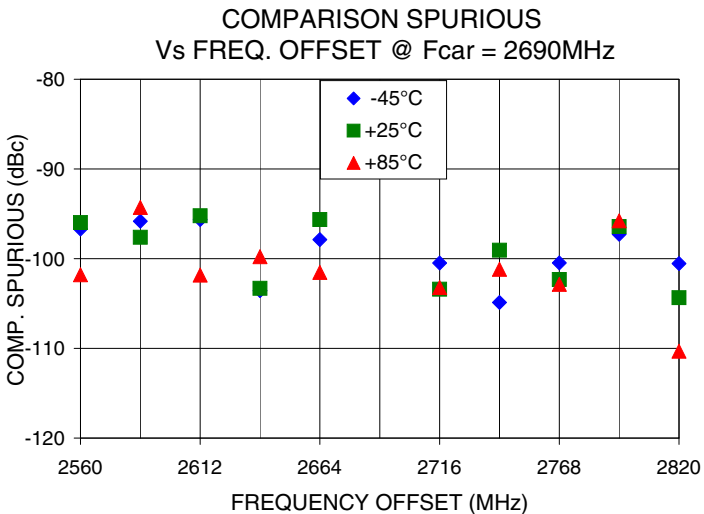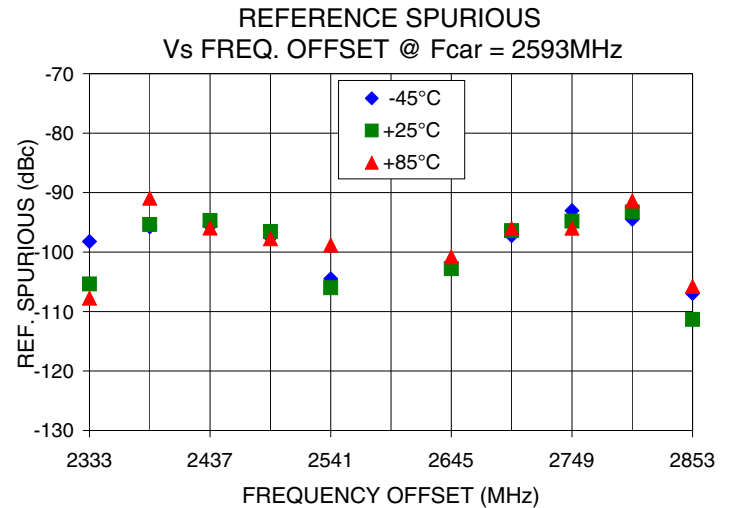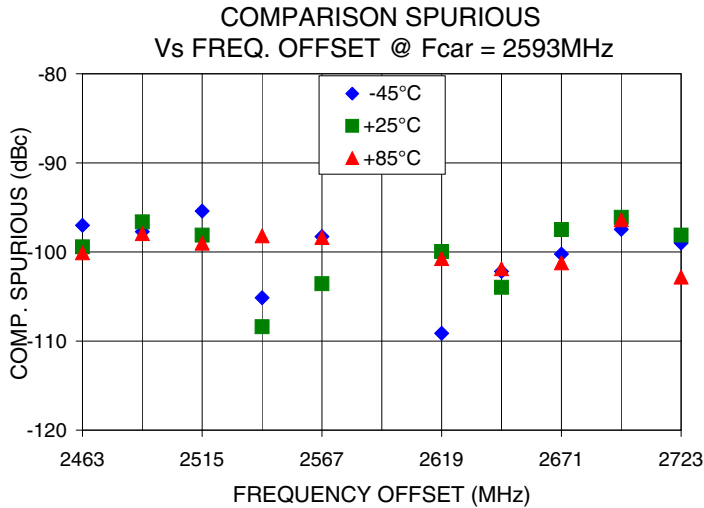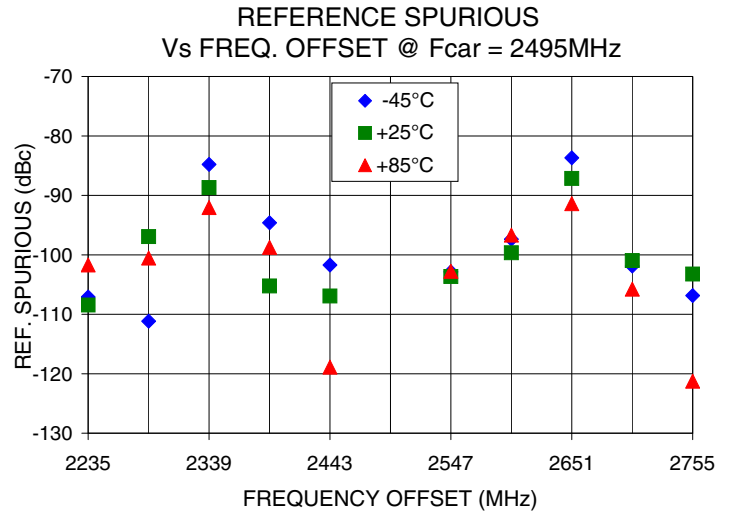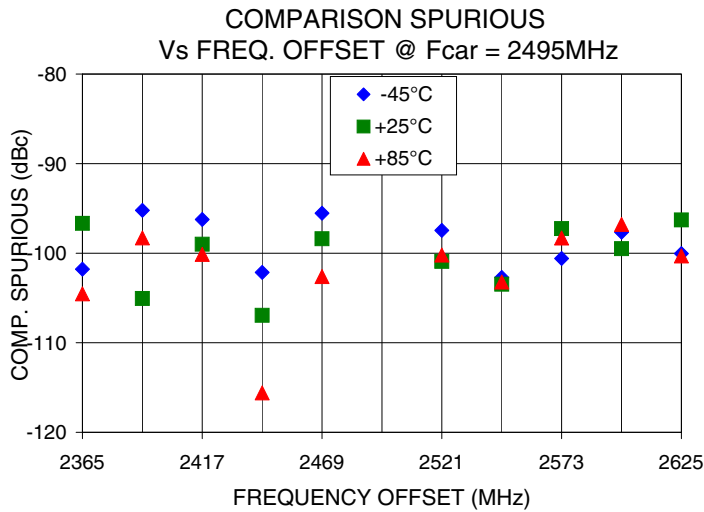

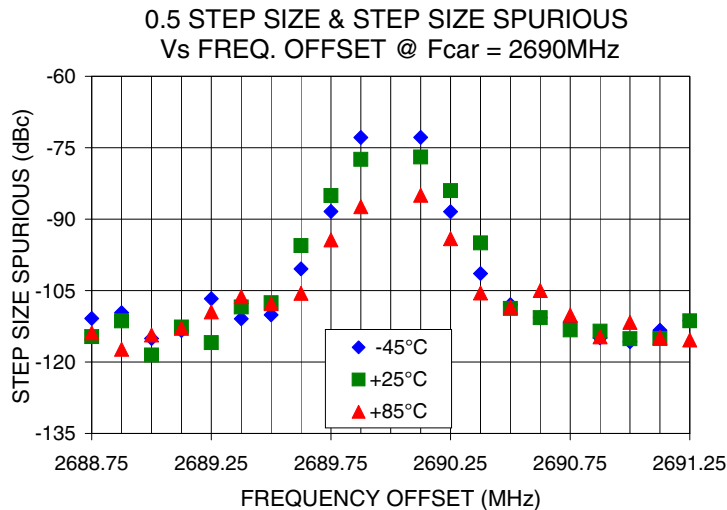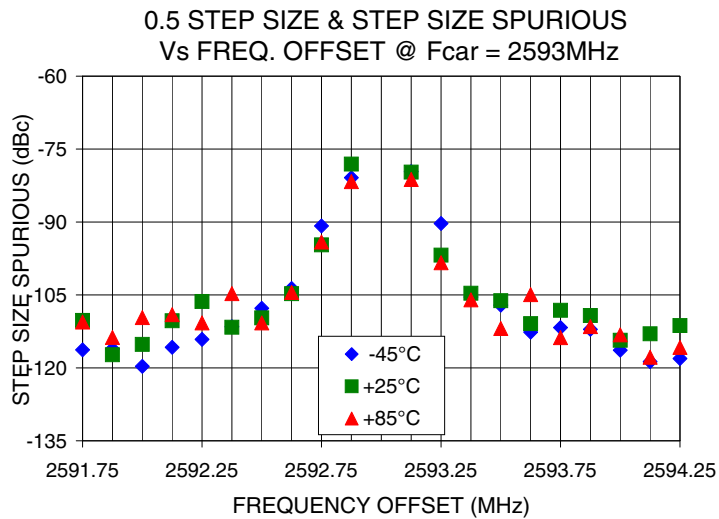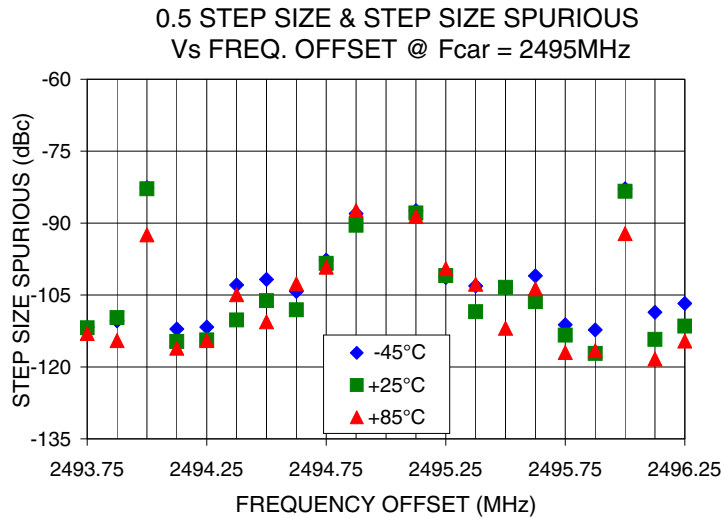

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Pin Configuration

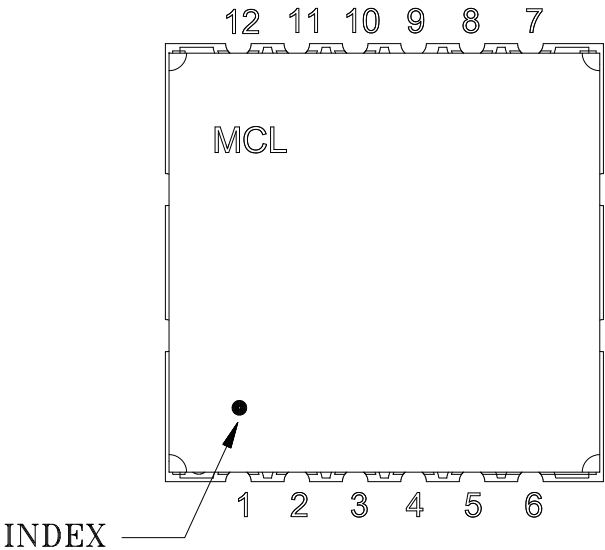


Pin Connection


| Pin Number | Function |
|------------|----------|
| 1 | CLOCK |
| 2 | DATA |
| 3 | LE |
| 4 | REF IN |
| 5 | GND |
| 6 | GND |
| 7 | VCC VCO |
| 8 | GND |
| 9 | RF OUT |
| 10 | GND |
| 11 | LOCK DET |
| 12 | VCC PLL |

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

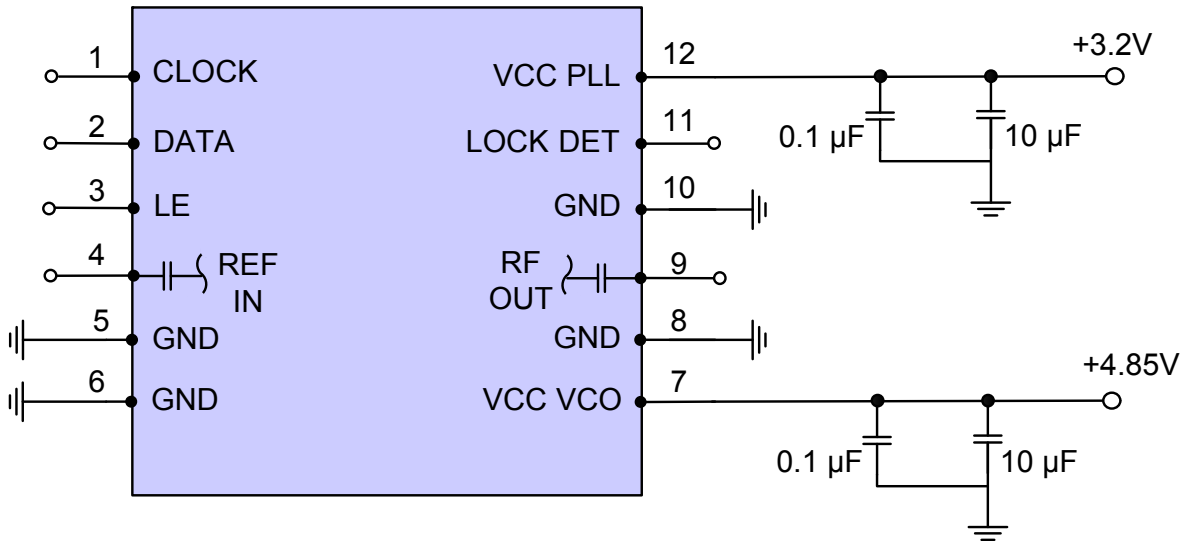

Device Marking

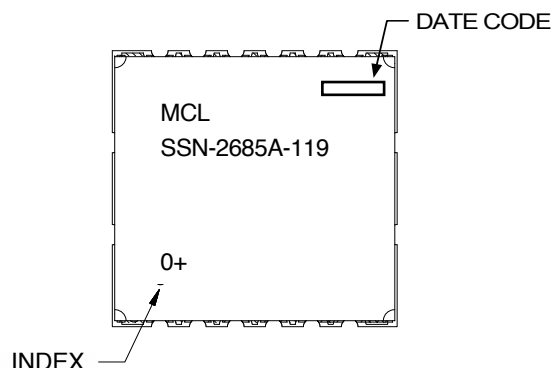**Additional Detailed Technical Information**

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: KJ1367

Tape & Reel: TR-F95

Suggested Layout for PCB Design: PL-317

Evaluation Board: TB-552+

Environment Ratings: ENV03T2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.