



90 Degree SMA Hybrid From 2 GHz to 4 GHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2052

Configuration

Connector 1	SMA Female
Connector 2	SMA Female
Coupled Connectors	SMA Female
Design	90 Degrees Hybrid

Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		4	GHz
Phase Difference		90		Degrees
Impedance		50		Ohms
Isolation	22			dB
Insertion Loss			3.1	dB
Input Power			50	Watts
Input VSWR			1.2:1	
Peak Power			3	KWatts
Flatness		0.8		dB
Coupling Value		3		dB
Coupled Loss			0.1	dB
Frequency Sensitivity		0.4		dB

Mechanical Specifications

Size

Length	1.15 in [29.21 mm]
Width/Dia.	1.25 in [31.75 mm]
Height	0.38 in [9.65 mm]

Connectors

Description	Connector 1	Connector 2	Coupled Connectors
Type	SMA Female	SMA Female	SMA Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [90 Degree SMA Hybrid From 2 GHz to 4 GHz Rated To 50 Watts PE2052](#)



90 Degree SMA Hybrid From 2 GHz to 4 GHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2052

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant
REACH Compliant


06/18/2012

Plotted and Other Data

Notes:

- Values at 25 °C, sea level

Outline Drawing

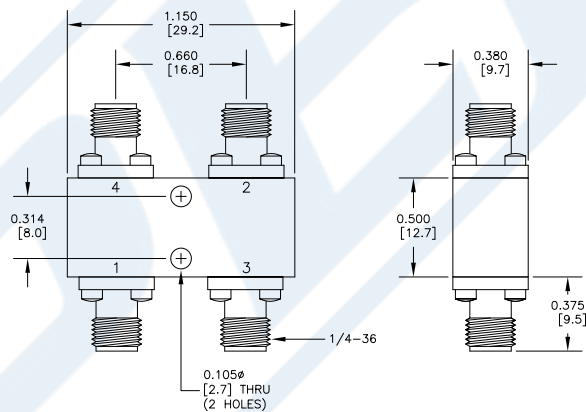

PORT CONFIGURATION				
INPUT	90° OUTPUT	0° OUTPUT	ISOLATED	
1	4	2	3	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [90 Degree SMA Hybrid From 2 GHz to 4 GHz Rated To 50 Watts PE2052](#)



90 Degree SMA Hybrid From 2 GHz to 4 GHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2052

90 Degree SMA Hybrid From 2 GHz to 4 GHz Rated To 50 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [90 Degree SMA Hybrid From 2 GHz to 4 GHz Rated To 50 Watts PE2052](http://www.pasternack.com/hybrid-directional-3-db-sma-coupler-2-4-ghz-50-watts-pe2052-p.aspx)

URL: <http://www.pasternack.com/hybrid-directional-3-db-sma-coupler-2-4-ghz-50-watts-pe2052-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.