


剥线尺寸
stripping dimension

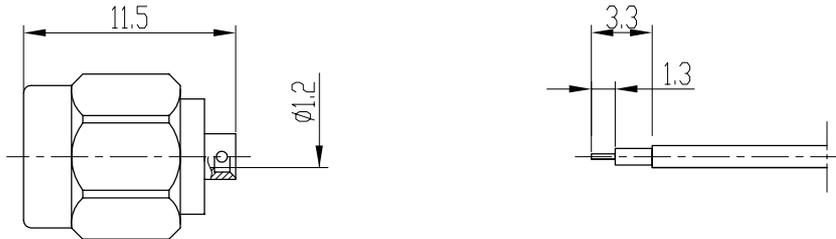

产品型号 type	电缆型号 cable type
SMA-JB1	0.047"

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~6Ghz
3. Contact resistance
Center conductor: ≤4.0 mΩ
Out conductor: ≤2.5 mΩ
4. Insulation resistance: ≥1000MΩ
5. Insulator withstanding: 750V
6. VSWR: ≤1.35
7. Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

1. Center contact :
Male: brass, gold plated
2. Body: brass, gold plated
3. Insulators: PTFE

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~6Ghz
3. 接触电阻:
中心导体: ≤4.0 mΩ
外导体: ≤2.5 mΩ
4. 绝缘电阻: ≥1000MΩ
5. 介质耐压: 750V
6. 电压驻波比: ≤1.35
7. 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

1. 中心接触件:
插针: 黄铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

 	SCALE	SMA-JB1 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	2.5:1		
DRAWN	NAME	DATE	<p style="text-align: center;">西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.</p>
CHECKED			
APPROVED			