


T-1002S01

2 GHz to 6 GHz

Broadband Coaxial ISOLATORS & CIRCULATORS

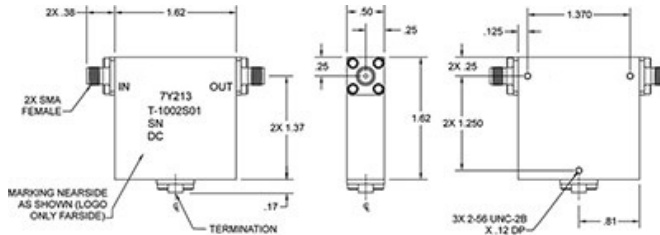

Specifications

RF Frequency	2 GHz to 6 GHz
Isolation	12 dB (min)
Insertion Loss	1 dB (max)
VSWR	1.65:1
Peak Power	100 Watts (max)
Average Power	10 Watts (max)
Package Size	1.62 x 1.62 x 0.50"

Environmental Notes



MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Manteca, CAL | 1-209-825-3977 | rf.mrcy.com
Specifications subject to change without notice

