

TNC PLUG RG214 RG9

SC4259





SPECIFICATIONS

ELECTRICAL
FREQUENCY: 0-11 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.4 MAX

MECHANICAL
MATERIAL BODY: NICKLE PLATED BRASS
MATERIAL CONTACT: BRASS
CONTACT PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON
INTERFACE: MIL-STD-348B
TEMPERATURE: -55° TO +155°C

ROHS COMPLIANT

ASSEMBLY PROCEDURE:
TRIM CABLE AS SHOWN
SLIDE SLEEVE ONTO CABLE
SOLDER CONTACT ONTO CENTER CONDUCTOR
FLARE CUT END OF BRAID SLIGHTLY BY ROTATING DIELECTRIC
PUSH CABLE IN UNTIL DIELECTRIC BOTTOMS IN CONNECTOR
TRIM EXCESS BRAID WIRES EVEN WITH SHOULDER OF BODY
SLIDE CRIMP SLEEVE FORWARD UNTIL FLUSH W BODY
CRIMP

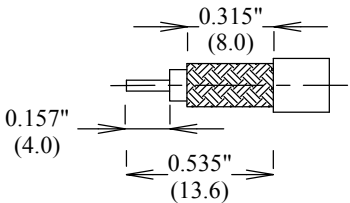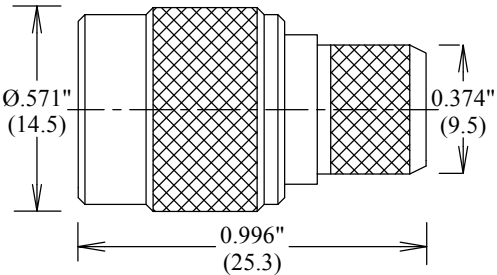

STRIPPING DIMENSION

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TNC PLUG RG214 RG9

SIZE

CAGE CODE

DWG NO

REV

A

3FKR5

SC4259

A

ALL DIMENSIONS IN inches(MM) Typical

SCALE

SHEET