
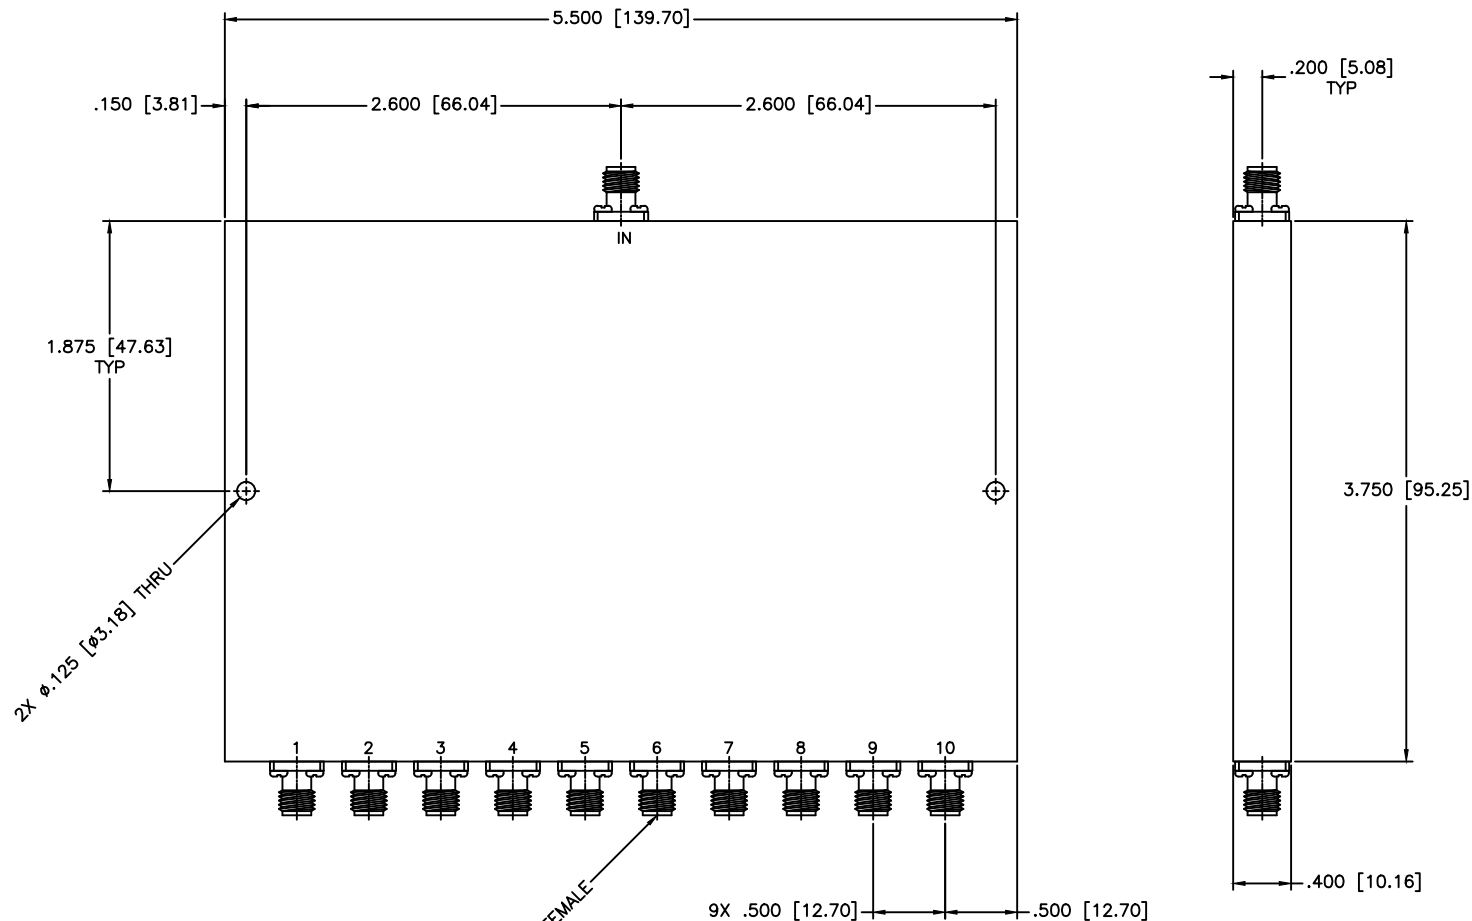


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: 4.2–4.4 GHz
 Insertion Loss: 2.6dB Max.
 Isolation: 14dB Min.
 VSWR Input/Output: 1.60:1 Max.
 Amplitude Balance: ± 1.5 dB Max.
 Input Power: 5 Watts (Load vswr @ 1.2)

MATERIAL:		MCLIMICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 10-WAY POWER DIVIDER	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PS10-16	
				CAGE CODE: OD2L5	
				SIZE: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 10-04-1999		REV: N/A	
APPROVED: T. Nguyen		DATE: 10-04-1999		DWG NO. 81126	
		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	