



- NOTES:
1. FREQUENCY: 1.2-1.9 GHz  
ISOLATION (MIN): 19 dB  
INSERTION LOSS (MAX): 0.35 dB  
VSWR (MAX): 1.30:1  
AMPLITUDE BALANCE: ± 0.30 dB  
PHASE BALANCE: ± 2°  
POWER HANDLING: 50 WATT CONTINUOUS @ 85°C  
OPERATING TEMPERATURE: -55 TO +85°C

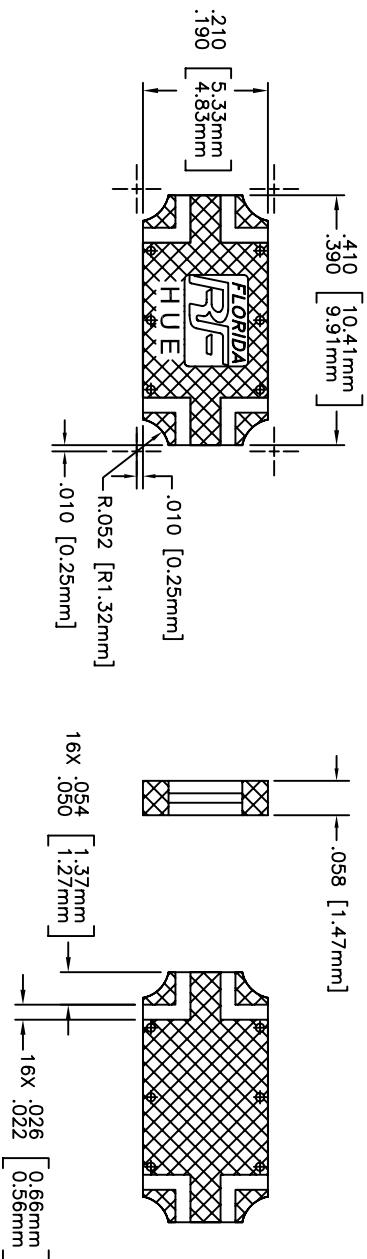

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FLORIDA RF LABS AND SHALL NOT BE DUPLICATED OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF PARTS OR DEVICES WITHOUT PERMISSION.									
 <i>FLA</i> <i>RF</i> <i>Labs</i>				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES FRACT ANG XX ±0.01 XXX ±0.005 XXXX ---			TITLE  COUPLER, HYBRID, 50 WATT		
QAGE CODE 27194				PLOT SCALE 5:1			DRAWING NUMBER HUE		
8851 SW OLD KANSAS AVE STUART, FL 34997				DRAWN BY CRH			CHECKED BY		
VENDOR CODE FRFL				ASSY REF			APPROVED BY		
							-		
							SHEET 1 OF 1		
EN 08-F0264									
D 3/24 2008									
REV DATE				CHANGE DESCRIPTION					
REVISION									