


	Tolerances	Revisions Description/Approved/Date	Approved M.H.	Date 07/02/03
	1-20=+/-0.2		Checked M.H.	Date 07/02/03
	20-30=+/-0.3		Drawn K.R.E.	Date 07/02/03
	30-40=+/-0.4		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750	
40-50=+/-0.5		5. Per MIL-P-19468	6. Per ZZ-R-765	7. Per WW-T-799
50-100=+/-0.75		8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	9. Nickel pl. 100 min. over copper strike	10. Per QQ-P-35
100-300=+/-1.5			11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
Angles=+/-1	Dimensions are in Millimeters			

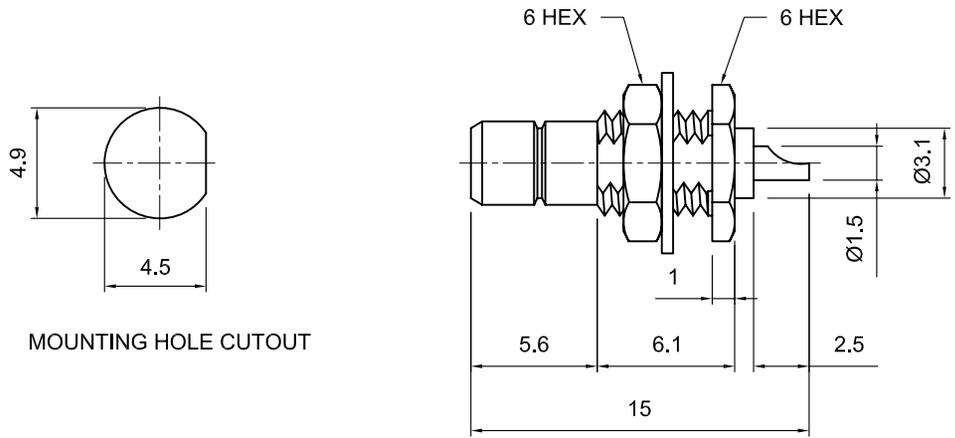

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 5640 Kearny Mesa Rd. Suite N San Diego, California 92111 Part Number: LTI-SBSF43RGT		
Connector Body	Brass, Note 1	Gold, Note 8	Description SMB Bulkhead Jack with solder cup.		
Center Contact: M	Brass, Note 1	Gold, Note 11			
Insulation	Teflon, Note 5	None	Gold plated Brass, Teflon Dielectric.		
Ferrule	--	--			
Gasket	--	--	Scale 1:1	Drawing No. SBSF43RGT	File Name SBSF43RGT
Hex Nut	Brass, Note 1	Same as body			
Lock Washer	Brass, Note 1	Same as body			