

# CONN SMA-M LMR200 CRIMP

SC7029

## SPECIFICATIONS

### ELECTRICAL:



FREQUENCY: 0-6 GHZ  
VSWR 1.21 MAX  
IMPEDANCE: 50 OHMS  
OP. TEMP RANGE: -55°C- +85°C

### MECHANICAL:



MATERIAL BODY: BRASS  
CENTER CONTACT: BRASS  
CONTACT PLATING: Au PER MIL-G-45204  
INSULATOR: TEFLON

TORQUE: 3-5 IN-IBS

ROHS COMPLIANT

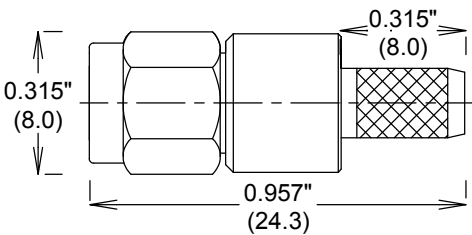

RECOMMENDED CRIMP DIE: .255"



STRIPPING DIMENSIONS

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 [WWW.FAIRVIEWMICROWAVE.COM](http://WWW.FAIRVIEWMICROWAVE.COM)

TITLE

**CONN SMA-M LMR200 CRIMP**

| SIZE     | CAGE CODE    | DWG NO        | REV       |
|----------|--------------|---------------|-----------|
| <b>A</b> | <b>3FKR5</b> | <b>SC7029</b> | <b>--</b> |
| SCALE    |              | SHEET         |           |

ALL DIMENSIONS IN inches(MM) Typical