

# Surface Mount Directional Coupler

75Ω

5 to 2000 MHz

TCD-9-1W-75+

## Maximum Ratings

Operating Temperature -40°C to 85°C



Storage Temperature -55°C to 100°C

\* Case temperature is defined as temperature on ground leads. Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL	6
NOT USED	5

## Outline Drawing

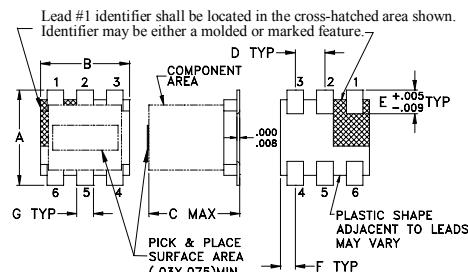

Suggested Layout,  
Tolerance to be within  $\pm 0.02$

## Outline Dimensions (inch/mm)


A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64

G	H	J	K	wt
.028	.065	.190	.030	grams
0.71	1.65	4.83	0.76	0.15

## Demo Board MCL P/N: TB-72

### Suggested PCB Layout (PL-010)

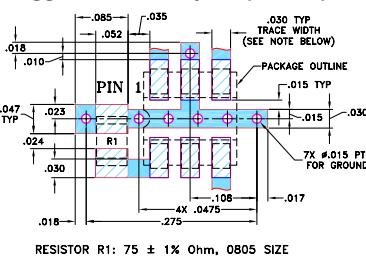

RESISTOR R1: 75 ± 1% Ohm, 0805 SIZE

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

□ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

□ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Features

- wideband, 5 to 2000 MHz
- low mainline loss, 1.3 dB typ. (5-1000 MHz)
- aqueous washable
- leads for excellent solderability
- protected by US Patent 6,140,887



CASE STYLE: DB714

PRICE: \$1.49 ea. QTY (20)

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

	Available Tape and Reel at no extra cost
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

## Electrical Specifications




FREQ. RANGE (MHz)	COUPLING (dB)	MAINLINE LOSS <sup>1</sup> (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W		
		L		M		U		L		M		U					
$f_L-f_U$	Nom.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.			
5-1000	8.9±0.5	±0.6	1.3	2.1	1.3	2.0	1.8	2.4	21	17	15	—	10	—	1.30	0.5	1.0
1000-2000	8.5±0.5	±0.6	—	—	2.5	—	—	—	—	—	10	—	—	—	1.60	—	1.0

L = low range [ $f_L$  to 10  $f_L$ ] M = mid range [10  $f_L$  to  $f_U$ /2] U = upper range [ $f_U$ /2 to  $f_U$ ]


1. Mainline loss includes theoretical power loss at coupled port.

## Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	1.29	8.99	21.24	16.92	25.24	16.42
200.00	1.28	8.94	17.61	17.17	24.67	16.49
600.00	1.46	8.84	11.06	12.00	15.49	12.84
800.00	1.63	8.98	9.49	11.14	14.69	11.57
1000.00	1.87	8.81	8.59	11.05	14.44	10.62
1200.00	2.06	8.50	8.12	11.15	14.53	9.81
1400.00	2.27	8.43	7.88	11.16	14.51	9.22
1600.00	2.50	8.66	7.63	11.20	15.36	8.91
1800.00	2.71	9.00	7.19	11.56	15.46	8.40
2000.00	2.73	8.92	6.49	11.81	14.35	8.53

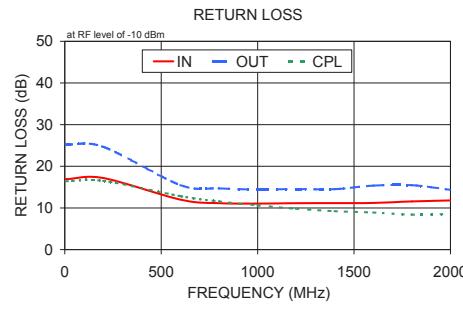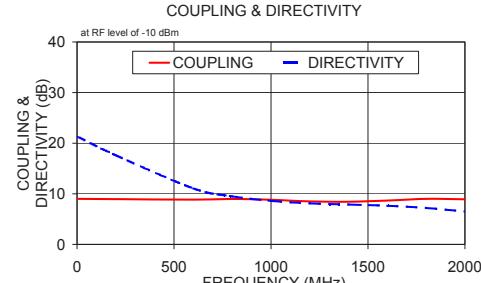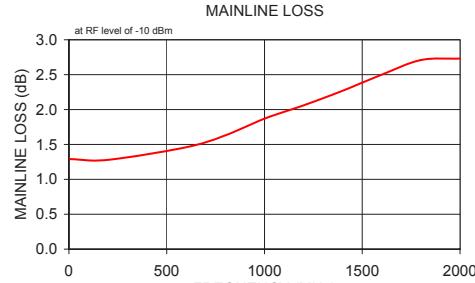

## Electrical Schematic

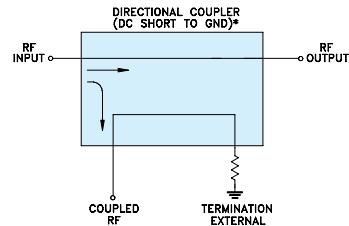

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.