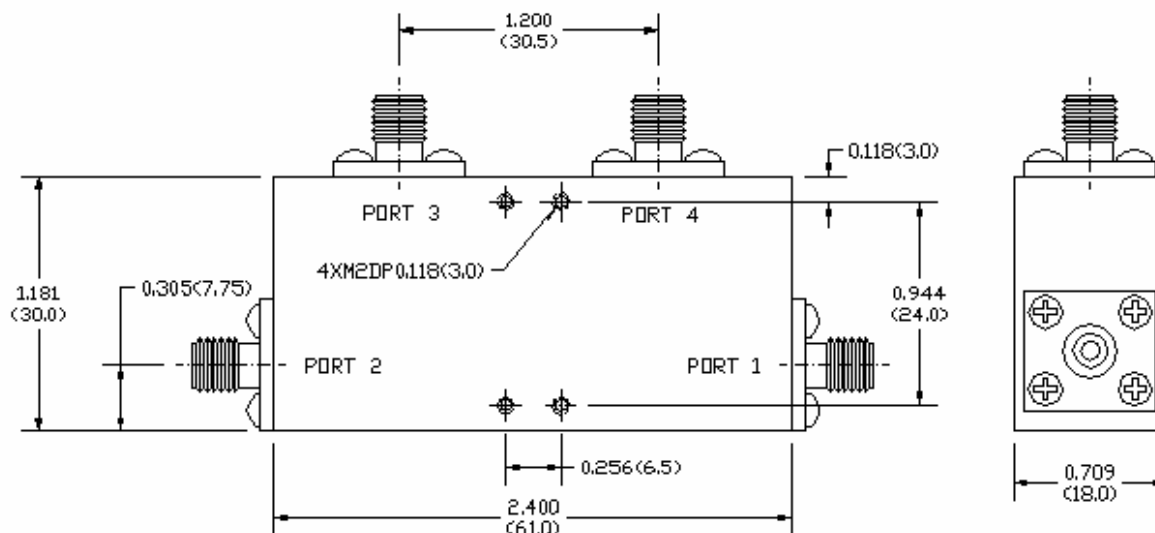


Key Features:

- Center frequency range: 2000~4000MHz full band
- Dual junction for high isolation
- SMA female connectors
- Power handling >+10Watts CW, 500 Watt Pulse
- Operating temperature -30~+60°C

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB 1-2, 3-4	Insertion Loss, dB 2-3, 4-1	Reverse Isolation, dB, 2-1, 4-3	Reverse Isolation, dB, 3-2, 1-4	VSWR	Power, Watts, CW/Pulse	Temp. Range, °C
F2962-0300-67	2.0~4.0	1.0 Max	0.5 Max	≥32	≥16	≤1.4	10/500	-30 ~ +60

Mechanical Structure:

Note: All units in inches(mm)

Ordering Information:

F2962-XXXX-XX
 ↓ ↓
 Frequency XX.XX GHz, Bandwidth, XX%,