




Standards
NF C 96-315
MIL-DTL-39030

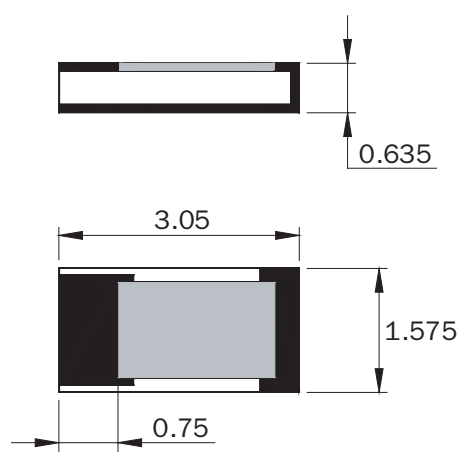

Substrate
Resistive film
Protection film
Contacts finition

AIN
Thick film
Epoxy
Silver over Nickel barrier



Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
45-0006Y	4	20	50	1.20

mm	inch
0.635	0.025
0.75	0.030
1.575	0.062
3.05	0.120



Available on Tap and Reel Packaging