



40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1006

PE15A1006 is a S-band high gain low noise coaxial amplifier operating in the 3.1 to 3.5 GHz frequency range. The amplifier offers 15 dBm of P1dB and high 40 dB typical small signal gain with the gain typical flatness of ± 0.3 dB. This excellent technical performance is achieved through the use of hybrid MIC design and advanced GaAs PHEMT devices. The low noise amplifier requires typically a +15V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -30°C and +60°C.

Features

- 3.1 GHz to 3.5 GHz Frequency Range
- P1dB 15 dBm
- Small Signal Gain: 40 dB
- Gain Flatness: ± 0.3 dB
- Noise Figure: 1.1 dB
- 50 Ohm Input and Output Matched
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Hermetically Sealed Module
- Overvoltage External Protection for Easy Repair

Applications

- S-band Military Radar
- Commercial Air Traffic Control
- Radar & Communication Systems
- High Gain Driver Power Amplifier
- High Gain Output Power Amplifier

Electrical Specifications (TA = +25°C, DC Voltage = 15Volts, DC Current = 150mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	3.1		3.5	GHz
Small Signal Gain		40		dB
Gain Flatness		± 0.3	± 0.5	dB
Output at 1 dB Compression Point	+15	+15		dBm
Noise Figure		1.1	1.2	dB
Input VSWR		1.5:1	1.7:1	
Output VSWR		1.5:1	1.7:1	
Operating DC Voltage	10	15	17	Volts
Operating DC Current		150	170	mA
Operating Temperature Range	-30		+60	°C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA PE15A1006](#)



40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1006

Absolute Maximum Rating

Parameter	Rating	Units
Source Voltage	+15	Volts
RF input Power	+17	dBm
Operating Temperature (base-plate)	-30 to +60	°C
Storage Temperature	-55 to +85	°C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA PE15A1006](#)





40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1006

Power Data

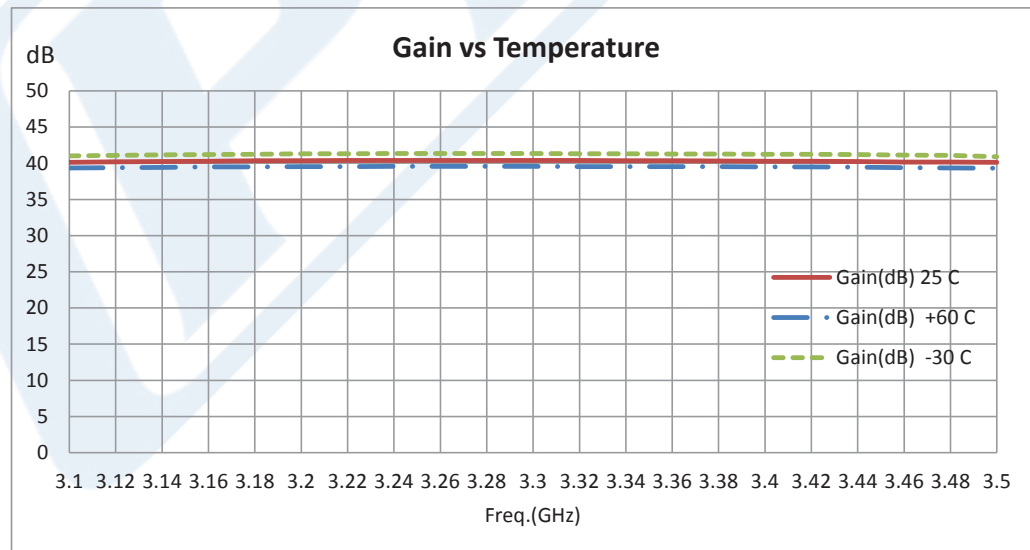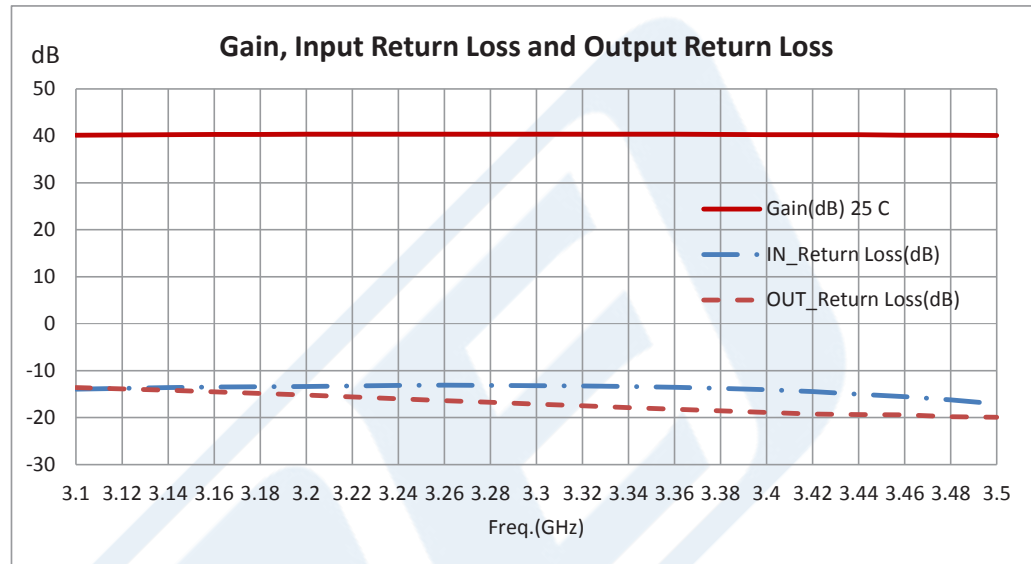



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA PE15A1006](#)



40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1006

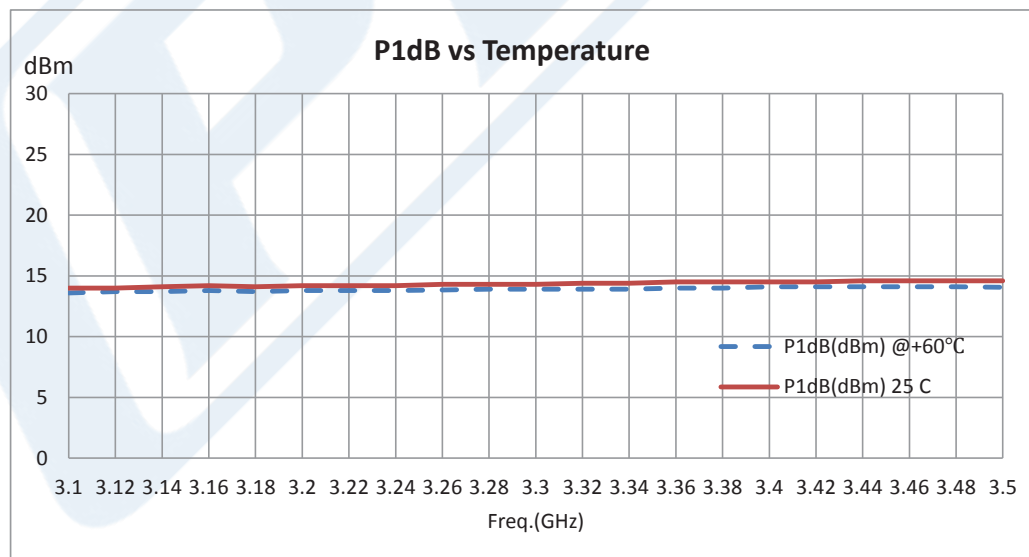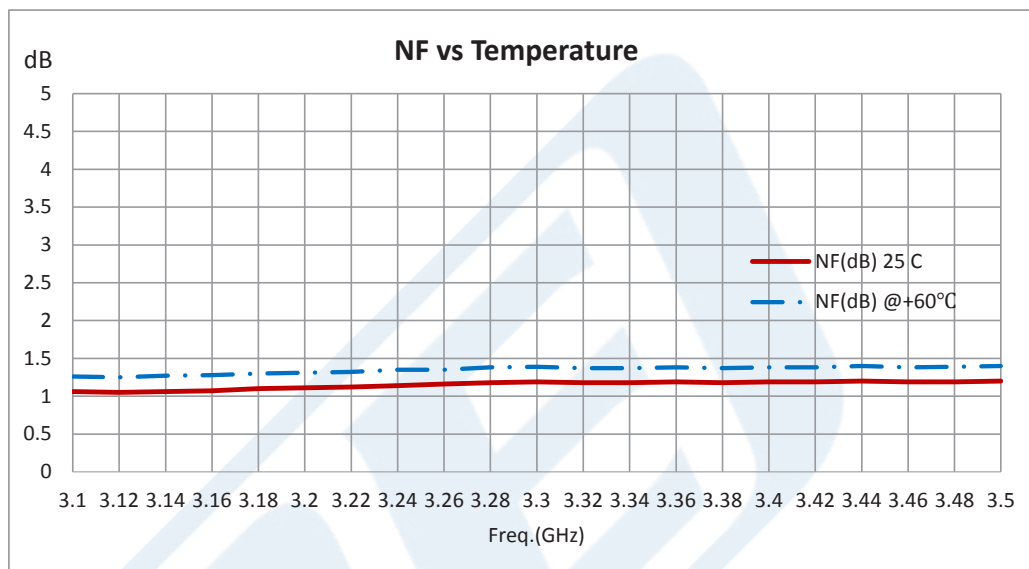

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA PE15A1006](#)



40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA

TECHNICAL DATA SHEET

PE15A1006

40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA PE15A1006](http://www.pasternack.com/40-db-gain-3.5-ghz-low-noise-high-gain-amplifier-sma-pe15a1006-p.aspx)

URL: <http://www.pasternack.com/40-db-gain-3.5-ghz-low-noise-high-gain-amplifier-sma-pe15a1006-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A1006 CAD Drawing

40 dB Gain, 1.1 dB NF, 15 dBm, 3.1 GHz to 3.5 GHz, Low Noise High Gain Amplifier SMA

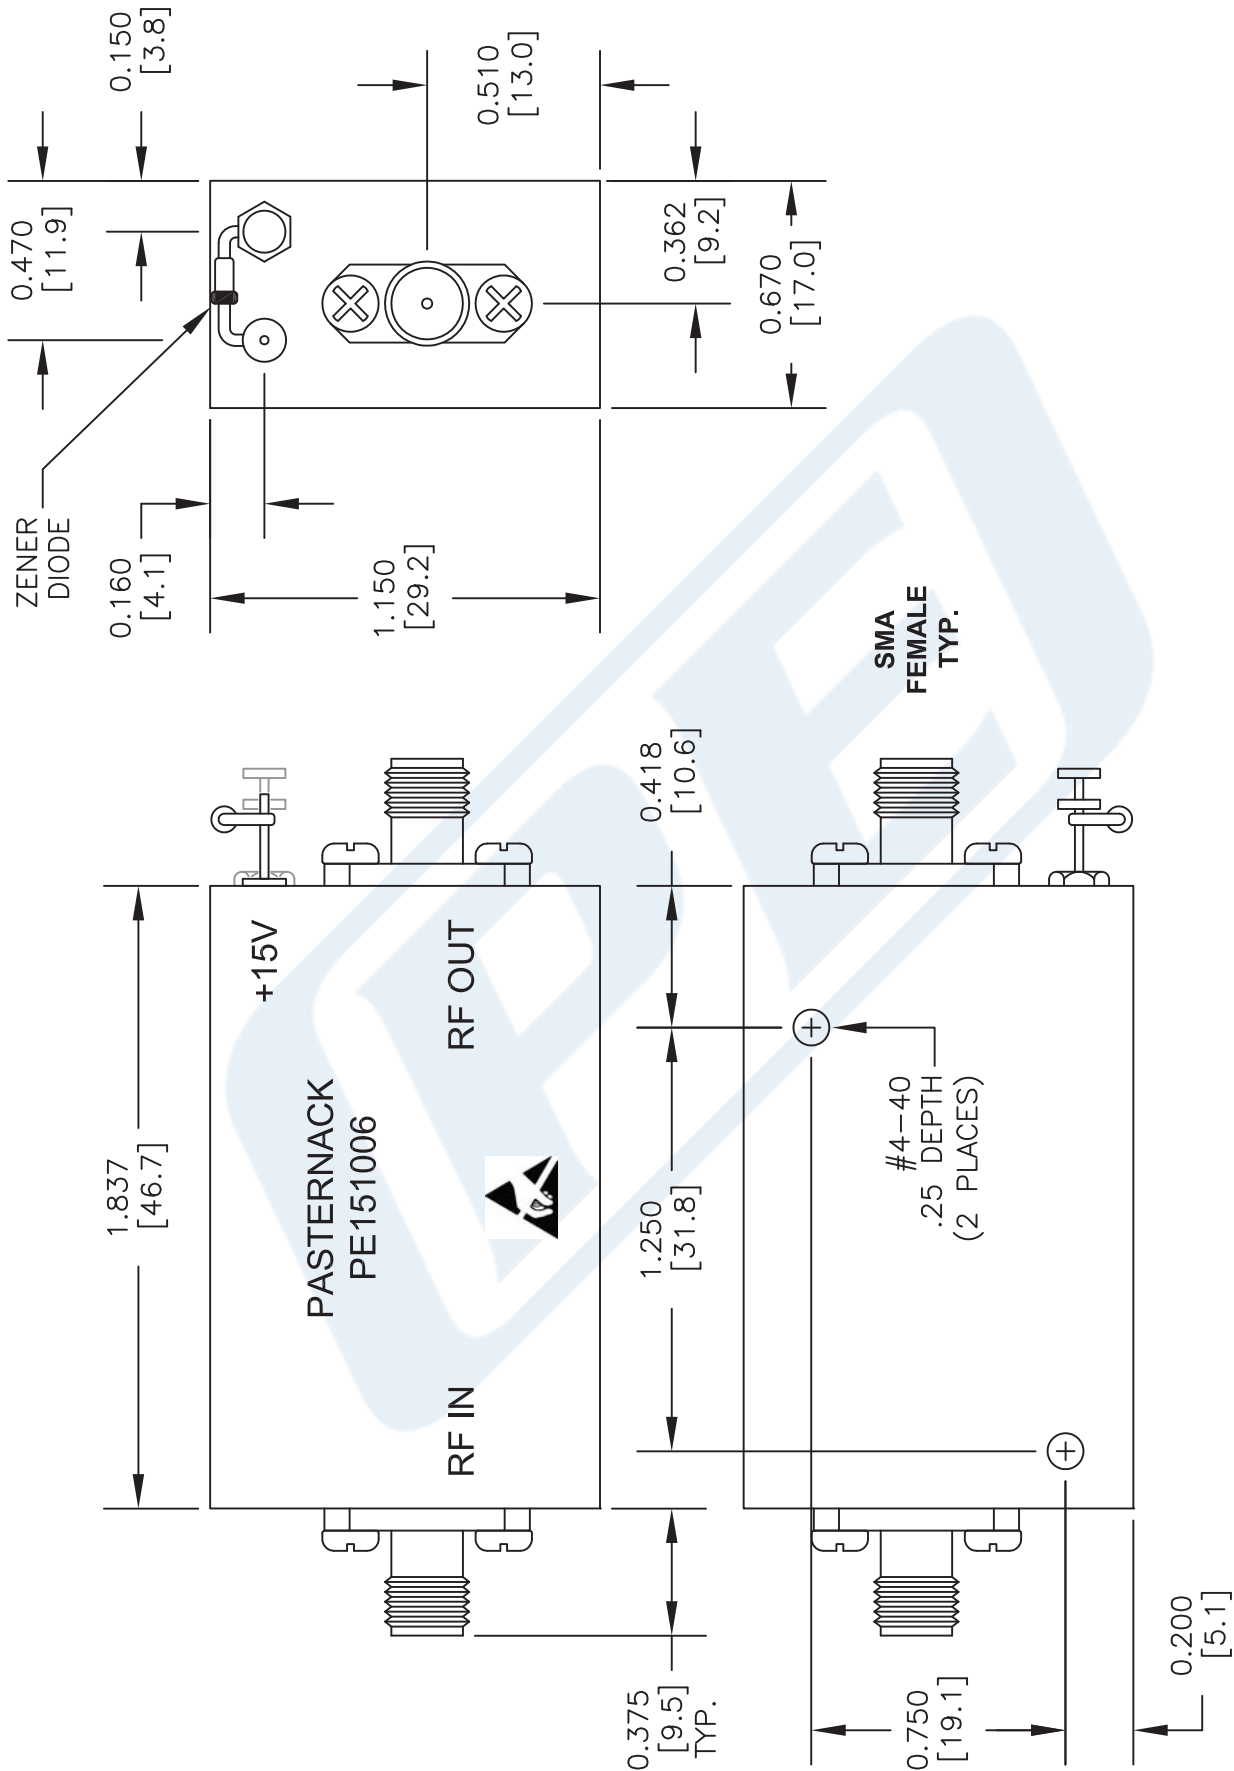

DWG TITLE

PE15A1006

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

2233

SIZE A

SCALE N/A

CAD FILE 040114

PE PASTERNAK
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com