
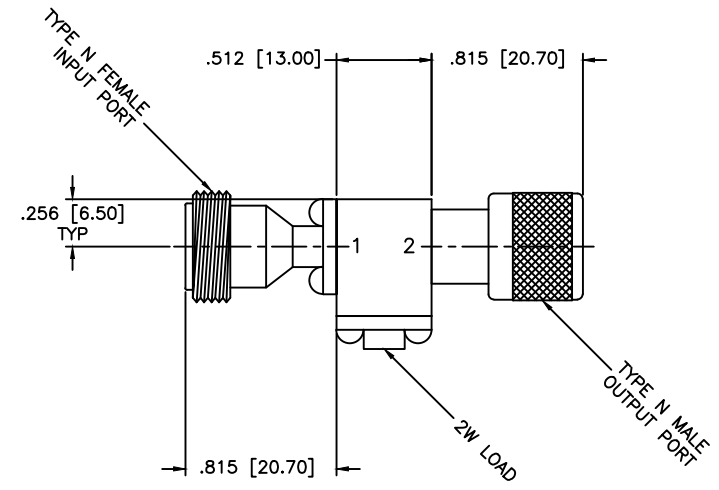


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

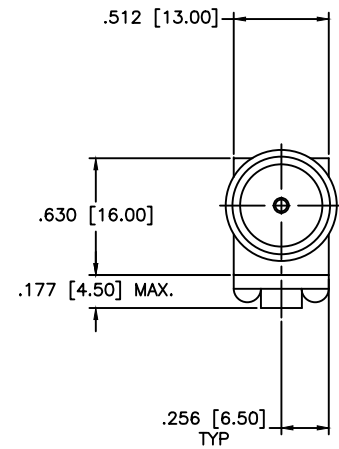

SPECIFICATIONS

Frequency Range: 13.75–14.50 GHz
 Isolation: 18dB Min.
 Insertion loss: 0.50dB Max.
 VSWR: 1.35:1 Max.
 Power: 2W Avg, 20W Peak
 Operating Temperature: –54°C to +85°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 02-09-2007		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	
				COAXIAL ISOLATOR	
APPROVED: T. Nguyen DATE: 02-09-2007		PART NO.: IS-64-2/NFI/NMO		CAGE CODE:	
				OD2L5	
THIRD ANGLE PROJECTION 		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING		DWG. NO. 82769	