


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

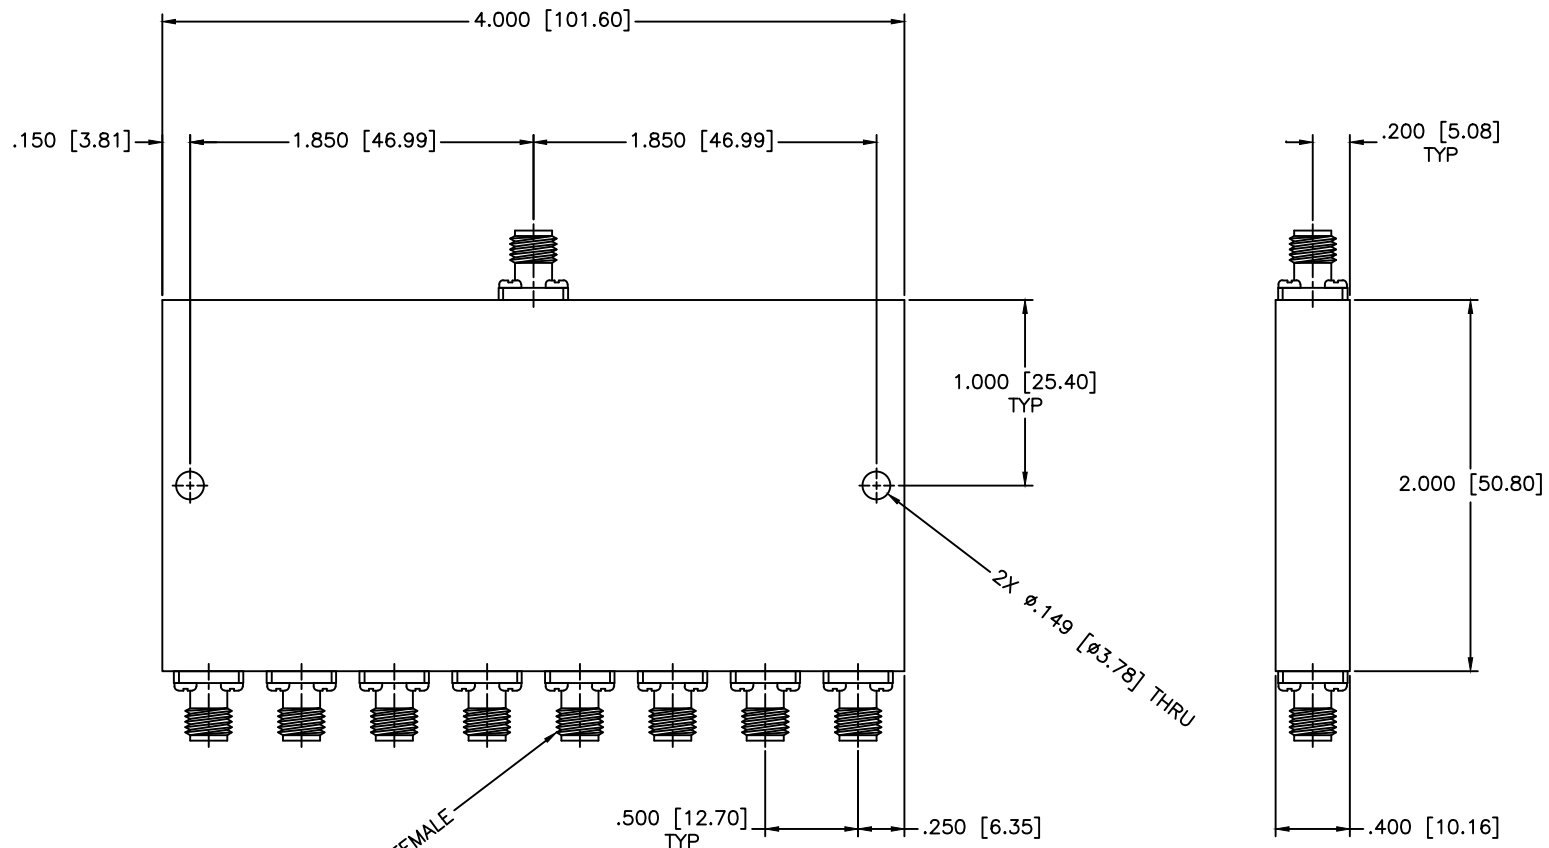

SPECIFICATIONS

Frequency Range: 7–8.5 GHz
 VSWR In/Out: 1.35:1/1.30:1 Max.
 Insertion Loss: 0.6dB Max.
 Isolation: 18dB Min.
 Amplitude Balance: ± 0.5 dB Max.
 Phase Balance: ± 8 Deg.
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 11-01-1997 APPROVED: T. Nguyen DATE: 11-01-1997		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$ PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		DRAWING TITLE: 8-WAY POWER DIVIDER	
				PART NO. PS8-22	
		CAGE CODE: OD2L5		SIZE: A	REV: N/A
				DO NOT SCALE THE DRAWING	
				DWG NO. 80254	