



SMA PIN-PIN Limiter, 100 Watts Peak Power,
18.5 dBm Flat Leakage, 2 GHz to 4 GHz

Limiters Technical Data Sheet

PE8020

Electrical Specifications

Internal DC Return

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		4	GHz
Insertion Loss		0.8		dB
Input VSWR		1.5:1		
Output VSWR		1.5:1		
Leakage (CW) @ 1 Watt CW			+18.5	dBm
Leakage (Peak)			+23	dBm
Recovery Time		20		ns
Input Power (CW)			1	Watt
Input Power (Peak) @1us pulse, 0.1% Duty Cycle Derated to 20% @ +125°C			100	Watt
Limiting Threshold		+12		dBm

Electrical Specification Notes:

Values at 25°C, sea level. Specification @ +25°C and -10 dBm input power.

Mechanical Specifications

Size

Length	1.21 in [30.73 mm]
Width	0.31 in [7.87 mm]
Height	0.31 in [7.87 mm]
Weight	0.2 lbs [90.72 g]
Body Material and Plating	Passivated Stainless Steel

Configuration

Style	PIN-PIN Limiter
Package Style	Connectorized Module
Impedance	50 Ohms
Connector 1	SMA Male
Connector 2	SMA Female

Environmental Specifications

Temperature

Operating Range	-55 to +90 deg C
Storage Range	-65 to +125 deg C

Shock	50 G's, 11 msec
-------	-----------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA PIN-PIN Limiter, 100 Watts Peak Power, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz PE8020](#)



SMA PIN-PIN Limiter, 100 Watts Peak Power,
18.5 dBm Flat Leakage, 2 GHz to 4 GHz

Limiters Technical Data Sheet

PE8020

Vibration

20G, 100 to 2000Hz

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

SMA PIN-PIN Limiter, 100 Watts Peak Power, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA PIN-PIN Limiter, 100 Watts Peak Power, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz PE8020](http://www.pasternack.com/sma-limiter-pin-pin-18.5-dbm-4-ghz-pe8020-p.aspx)

URL: <http://www.pasternack.com/sma-limiter-pin-pin-18.5-dbm-4-ghz-pe8020-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE8020 CAD Drawing

SMA PIN-PIN Limiter, 100 Watts Peak Power, 18.5 dBm Flat Leakage, 2 GHz to 4 GHz

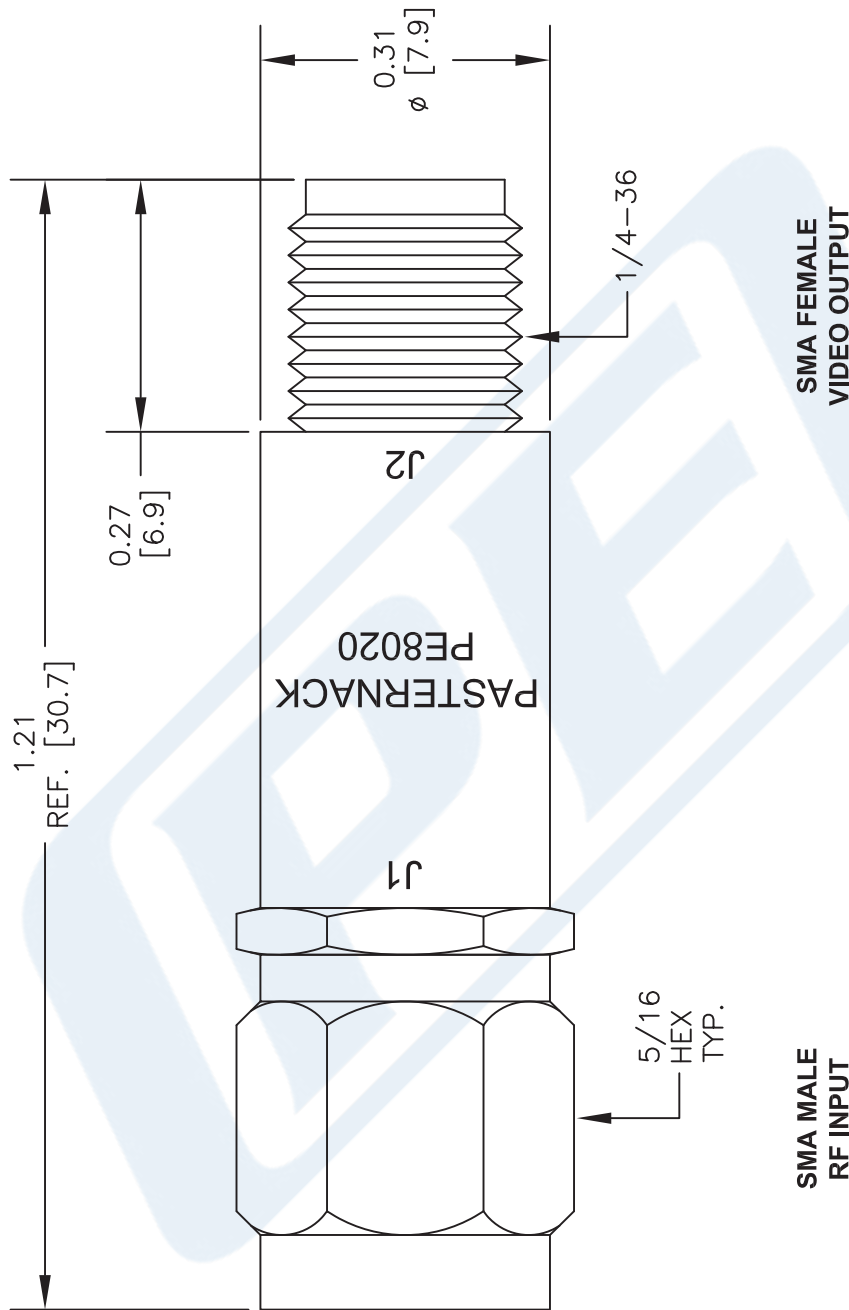

DWG TITLE

PE8020

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].



PASTERNAK®
THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 090313

SCALE N/A

SIZE A

2233