

2.4mm MALE .047 SEMI-RIGID

SMC24-047M


SPECIFICATIONS

ELECTRICAL
50 OHMS
VSWR 1.3:1 MAX @ 50 GHZ
FREQUENCY: DC-50 GHZ

MECHANICAL
500 CYCLES MIN
4.0 INCH-OUNCES MIN CONTACT TORQUE
8-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
-55°C TO +100°C
CORROSION: MIL-STD 202
VIBRATION: MIL-STD 202

MATERIALS PASSIVATED STAINLESS STEEL
BODY: SST ASTM A484 / A582
BeCu ATSM-B-196
PASSIVATED ASTM A380
CENTER CONTACTS Au PLATED
MIL-G-45204

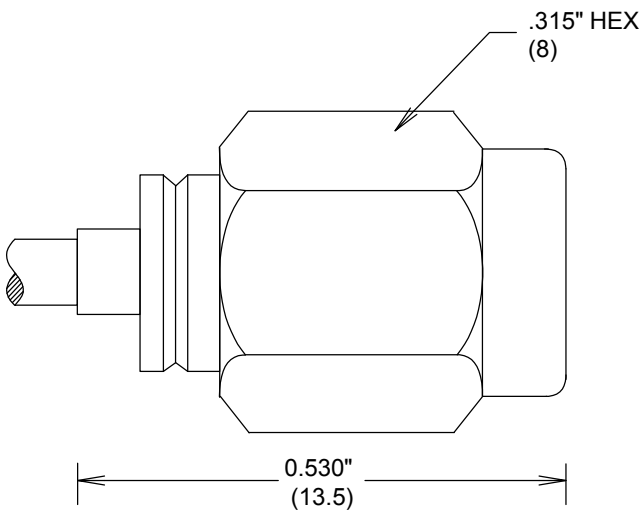

FAIRVIEW MICROWAVE INC.			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE			
2.4mm MALE .047 SEMI-RIGID			
SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SMC24-047M	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical