



RF-LAMBDA

The power beyond expectations

RFLT4W0200M-75


1MHz-200MHz 4-Way 75Ω Power Divider



Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner *
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E-16400
- 10W forward power handling capability
- * 2W maximum input when work as combiner.

Frequency Range (MHz) f _L f _U	Insertion Loss		Isolation			Phase Unbalance			Amplitude Unbalance		
	(dB)		(dB)			(degree)			(dB)		
	L M	U	L	M	U	L	M	U	L	M	U
	TypMax	TypMax	TypMin	TypMin	TypMin	TypMax	TypMax	TypMax	TypMax	TypMax	TypMax
1-200	0.4 0.7	0.7 1.0	30 25	30 25	25 20	3	4	6	0.15	0.2	0.3

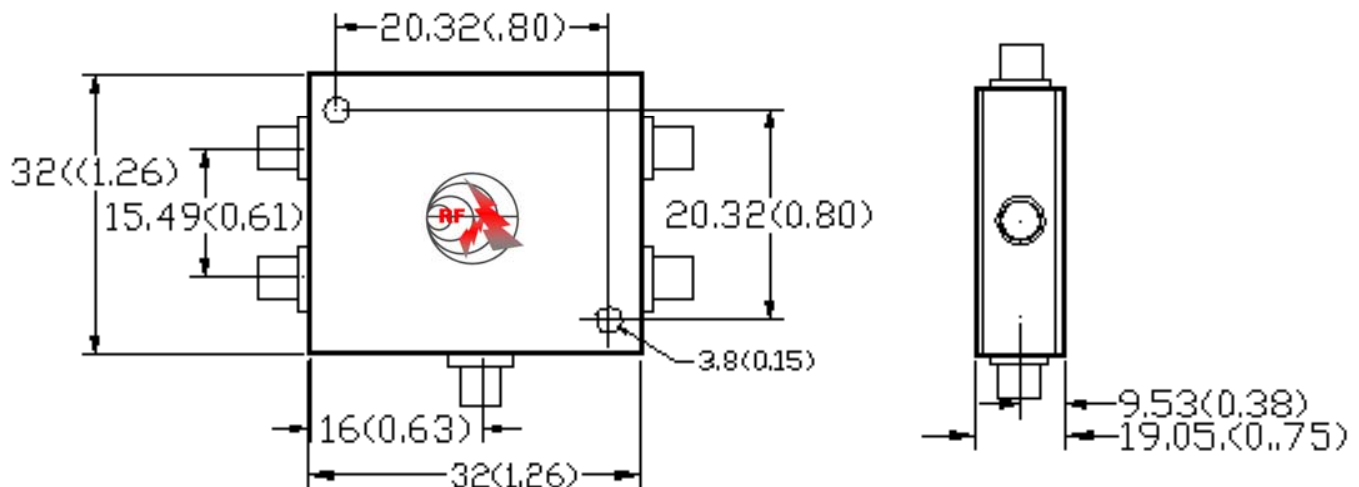

Notes:

1. Case material: Aluminum alloy with Nickel-plating.
2. Connector: N/SMA/BNC/TNC...
3. Temperature -40° C~+85° C

1MHz-200MHz 4-Way Power Divider