




Werlatone®, Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



4-Way *Radial* Combiner/Divider

Model D10119

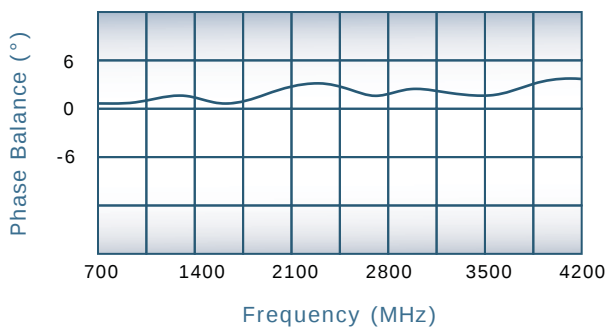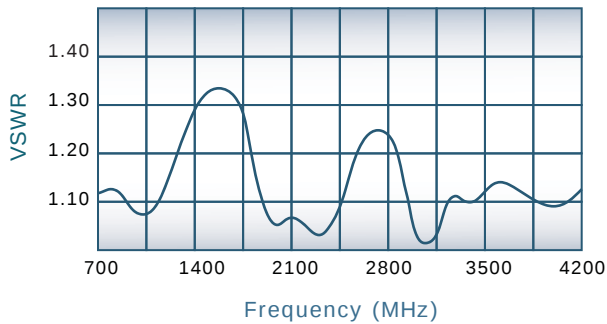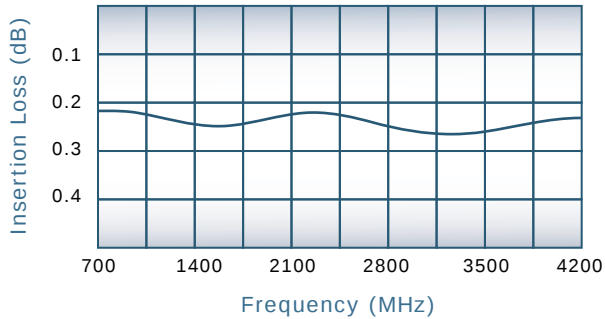



Frequency:	700 - 4200 MHz
Power:	2,000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.35:1 Max.
Phase Balance:	± 6° Max.
Amplitude Balance:	0.3 dB Max.

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -40°C to +70°C
- Outer conductor assy: copper outer conductor and brass flanges (2x)

Connector Configurations

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D10119-20	7/16 Female	N Female
D10119-22	7/16 Female	SMA
D10119-23	7/16 Female	BNC

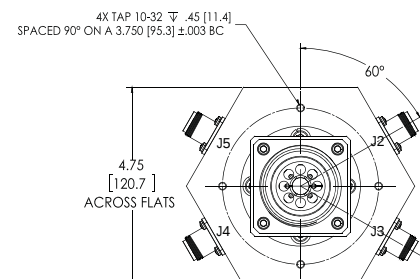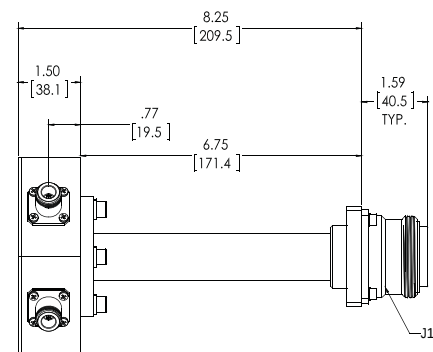

SINCE 1965

