

COUPLER

90° HYBRID 80 WATT

HybriX®



DATA SHEET

PART SERIES: HPP2F

SHEET 1 OF 3
Dwg HPP2F


EN 15-1103
Revision A

FEATURES

- Low Profile Surface Mount Package
- High Power
- Low Insertion Loss
- High Isolation
- High Reliability

APPLICATIONS

- Power Amplifiers
- Modulator
- Demodulator
- Signal Distribution Network
- Antenna Feeds
- Switch Networks

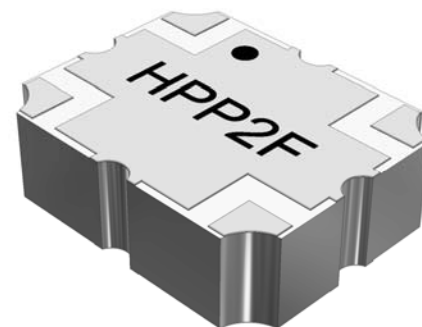

GENERAL DESCRIPTION

EMC Technology offers high performance hybrid couplers in a low profile, surface mount package. These couplers are designed for demanding applications where high power, low loss and excellent isolation are required.

ORDERING INFORMATION

Part Identifier: HPP2F

SPECIFICATIONS

1.0 ELECTRICAL

Frequency	Isolation	Insertion Loss	VSWR	Amplitude Balance	Phase Balance	Power Handling
2000 - 3000 MHz	20 dB Min	0.25 dB Max	1.20:1 Max	± .35 dB Max	90° ± 2°	80 Watts
2300 - 2700 MHz	25 dB Min	0.20 dB Max	1.15:1 Max	± .20 dB Max	90° ± 2°	80 Watts

2.0 ENVIRONMENTAL

Operating Temperature: -55°C to +85°C

3.0 MARKING

Part Number and Pin 1 Indicator

4.0 QUALITY ASSURANCE

Sample Inspect Per MIL-STD-105, Level II, 1.0% AQL.

Visual and Mechanical Examination for Conformance To Outline Drawing Requirements.

Measure Amplitude Balance and VSWR

Test Data Requirements

No Test Data Required

Data Retention – 12 months

5.0 PACKAGING

Standard: Tape And Reel

Note: Specifications are subject to change.

COUPLER

90° HYBRID 80 WATT

HybriX®



DATA SHEET

PART SERIES: HPP2F

SHEET 2 OF 3
Dwg HPP2F


EN 15-1103
Revision A

6.0 MECHANICAL

Substrate:	PTFE
Conductor:	Copper
Plating:	Tin
Application Note:	AN0030 (General Hybrid and Directional Coupler)

PIN CONFIGURATION

Port	J1	J2	J3	J4
J1	-	Iso	-90°	0°
J2	Iso	-	0°	-90°
J3	-90°	0°	-	Iso
J4	0°	-90°	Iso	-

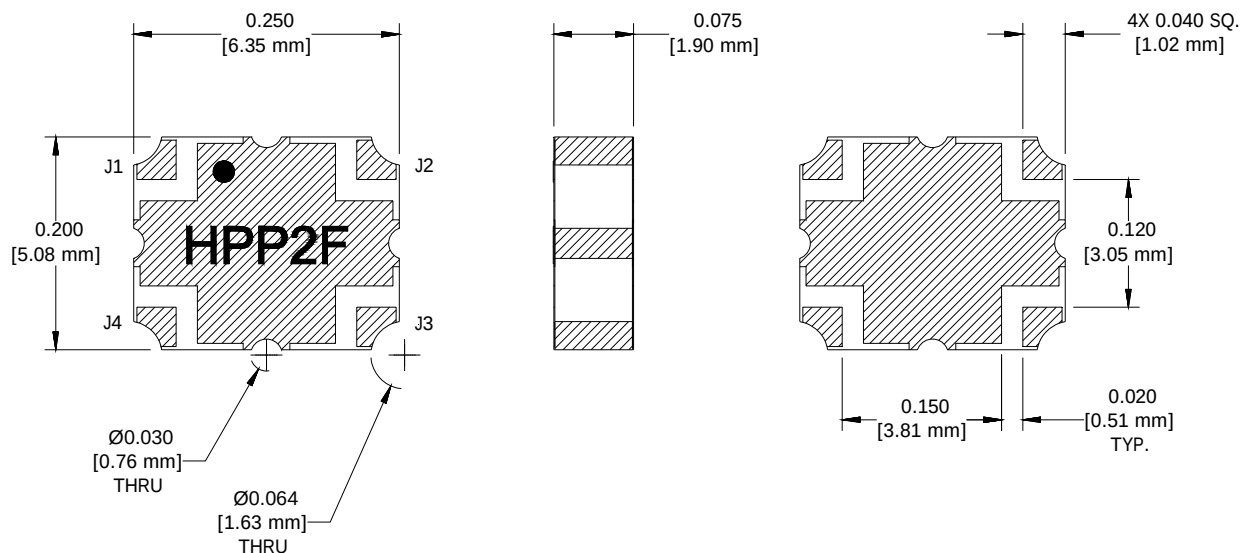

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.01 X.XXX = ± 0.005

Metric dimensions are provided for reference only

Note: Specifications are subject to change.

COUPLER

90° HYBRID 80 WATT

HybriX®








DATA SHEET

PART SERIES: HPP2F

SHEET 3 OF 3
Dwg HPP2F

EN 15-1103
Revision A

7.0 TYPICAL PERFORMANCE AT 25°C

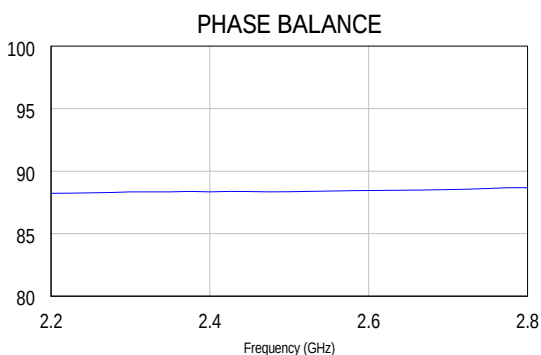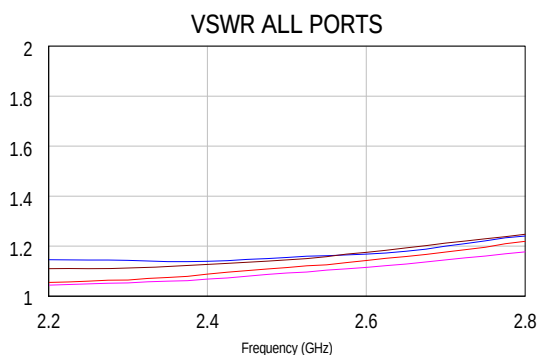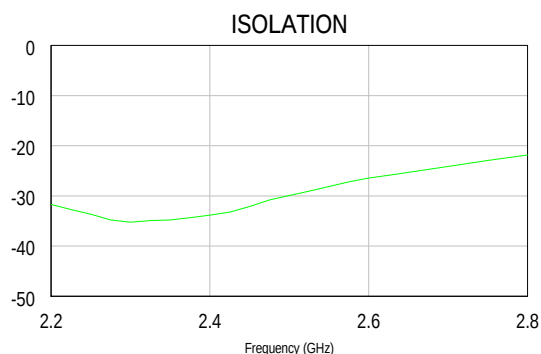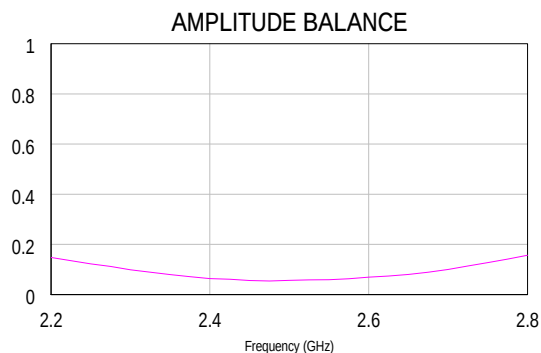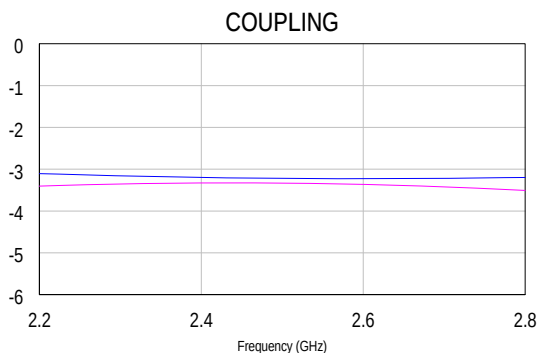

Note: Specifications are subject to change.