

Bandpass Filter

BPF-B48+

50Ω 47 to 49 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.15W Max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	2
GROUND	3, 4, 5, 6


Outline Drawing

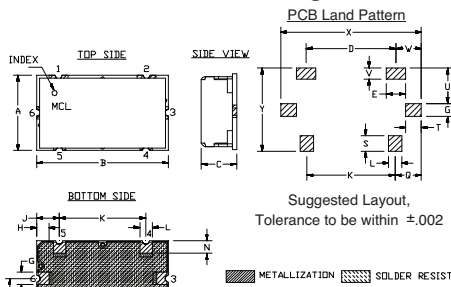




Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M
.472"	.826"	.220"	.551"	.118"	.047"	.078"	.076"	.142"	.543"	.078"	.236"
11.99	20.98	5.59	14.00	3.00	1.19	1.98	1.92	3.61	13.79	1.98	5.99
N	P	Q	S	T	U	V	W	X	Y	wt	
.079"	.138"	.162"	.098"	.096"	.217"	.067"	.157"	.866"	.512"	grams	
2.01	3.51	4.11	2.49	2.44	5.51	1.70	3.99	22.00	13.00	6.0	

Demo Board MCL P/N: TB-400+ Suggested PCB Layout (PL-247)

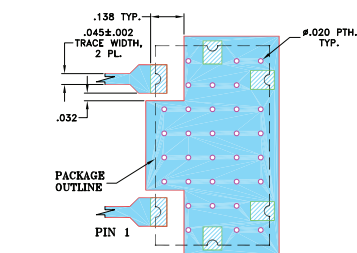

- NOTES:
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-

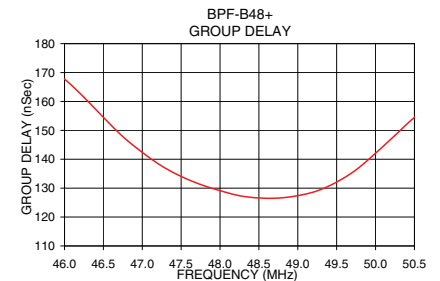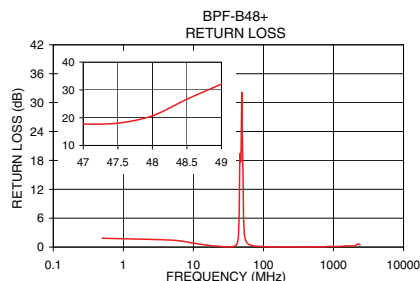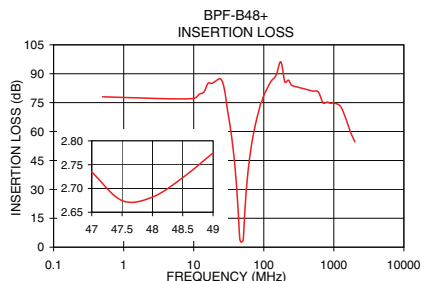

Features

- High rejection
- Good VSWR, 1.2:1 typ @ passband
- Shielded case
- Aqueous washable

Applications

- Military
- Lab
- Harmonic rejection
- Transmitters/receivers



CASE STYLE: HZ1198
PRICE: \$29.95 ea. QTY (1-9)


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 4dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 40dB		Passband		Stopband
F _c	F ₁ - F ₂	F ₃	F ₄	F ₅	F ₆	Typ.	Max.	Typ.
48	47 - 49	41	56	37	64 - 2400	1.2	1.5	20

Typical Frequency Response

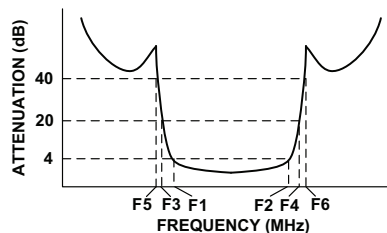

Functional Schematic

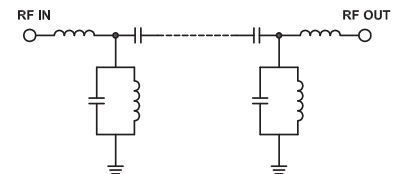

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ			
0.5	78.03	4.46	1.85	46.00	167.71
37.0	49.10	0.39	0.12	46.25	161.42
41.0	30.99	0.52	0.47	46.50	154.52
44.0	12.42	0.63	2.64	47.00	142.38
45.0	6.45	0.44	6.93	47.25	137.66
46.0	3.43	0.15	19.20	47.50	134.06
47.0	2.73	0.03	17.62	47.75	131.25
47.5	2.67	0.02	18.05	48.00	129.14
48.0	2.68	0.02	20.70	48.25	127.37
48.5	2.72	0.03	26.66	48.50	126.62
49.0	2.77	0.03	32.10	48.75	126.57
51.0	4.54	0.37	15.56	49.00	127.40
52.0	9.10	0.73	6.47	49.25	129.07
53.0	14.81	0.76	3.42	49.50	132.10
56.0	28.44	0.55	1.32	49.75	136.34
64.0	48.44	0.36	0.45	50.00	142.10
500.0	80.99	2.23	0.03	50.25	148.26
2400.0	47.70	0.53	0.47	50.50	154.45

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M119635
EDR-9508U
BPF-B48+
URJ/RAV
121011
Page 1 of 1