Power Divider / Combiner

Model: MPD8-100400

Microot Microwave co., Ltd.

8-Way Power Divider

Elec. Spec. "50Ω"

Inquiry

Freq. Range (GHz)	10-40
Input VSWR Max	1.7
Output VSWR Max	1.7
Insertion Loss (dB) Max	3.4
Amp. Bal. (dB) Max	±0.5
Pha. Bal. (deg) Max	±5
Isolation (dB) Min	16
CW Power (W) Max	20
Peak Power (KW) Max	3
Connector	2.92mm-F
Operating Temp. (°C)	-35~+105
Storage Temp. (°C)	-55~+125

Features

1.Theortical Insertion Loss not included in the Insertion Loss Parameter.
2. Multi-Octave bandwith of working frequency range.
3. Superior phase balance and amplitude balance between any 2 ports.
4. Low VSWR and high Output Isoliation.

Outline Drawing Unit: mm

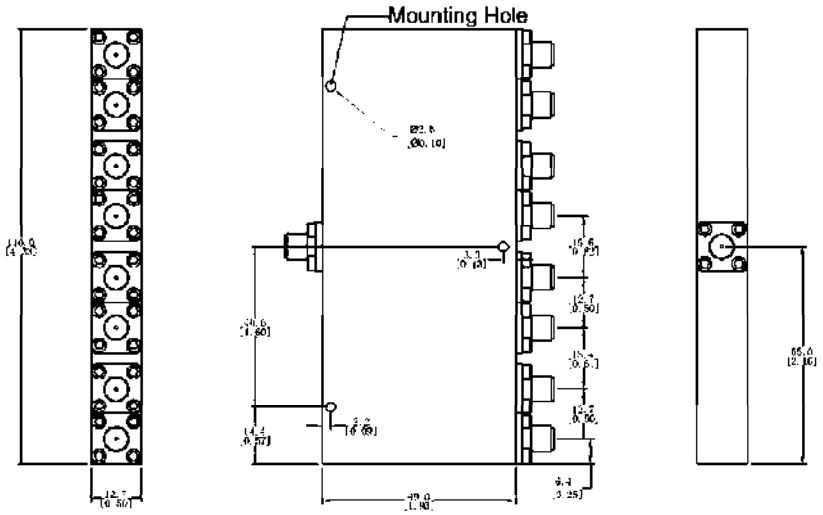

Add: #D505,Dahecang, No.511,Xingshi Rd,Western Section 1,3rd Ringroad, Chengdu,CHINA
Tel: 86-28-85542308, Fax: 86-28-85007280, E-mail: info@mic-root.com,Website: www.mic-root.com