


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

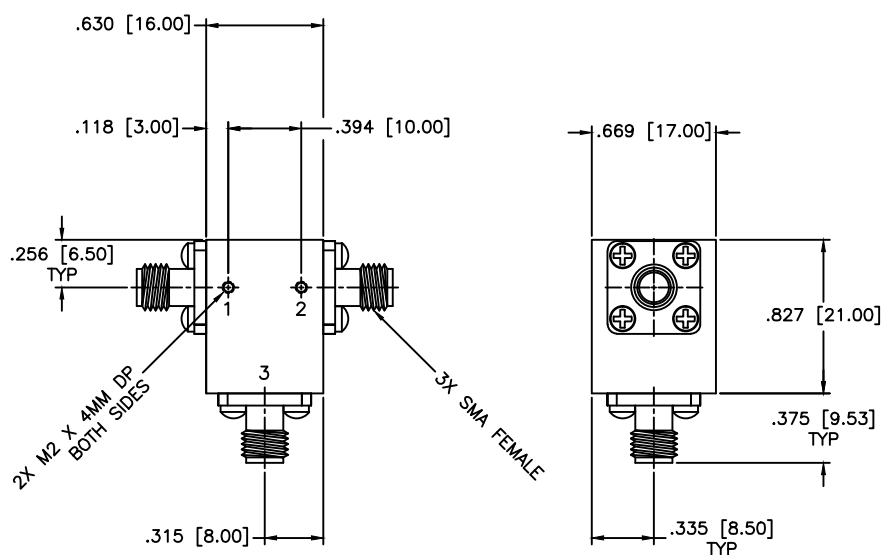

SPECIFICATIONS

Frequency Range: 8–12 GHz
Isolation: 20dB Min.
Insertion loss: 0.5dB Max.
VSWR: 1.25:1 Max.
Operating Temperature: –54°C to +85°C
Power: 20W Avg, 250W Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 5-23-2006		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR	
				PART NO. CS-58-20	
APPROVED: T. Nguyen DATE: 5-23-2006		CAGE CODE: OD2L5		SIZE: A REV: A DO NOT SCALE THE DRAWING	DWG NO. 82557