

75 Ohm F Female to RCA Plug Adapter



TECHNICAL DATA SHEET

PE9163

75 Ohm F Female to RCA Plug Adapter

Configuration

Connector 1	F Female
Impedance 1	75 Ohms
Connector 2	RCA Plug
Impedance 2	75 Ohms
Adapter Design	Standard
Body Style	Straight

Mechanical Specifications

Size

Length, in [mm]	1.232 [31.29]
Width/Dia., in [mm]	0.412 [10.46]

Connector 1

Type	F Female
Inner Conductor Material and Plating	Brass, Tin
Body Material and Plating	Brass, Nickel
Dielectric Type	ABS

Connector 2

Type	RCA Plug
Inner Conductor Material and Plating	Brass, Nickel
Body Material and Plating	Brass, Nickel
Dielectric Type	ABS

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data


Notes:	Values at 25 °C, sea level
--------	----------------------------

URL: <http://www.pasternack.com/f-female-rca-plug-straight-adapter-pe9163-p.aspx>

75 Ohm F Female to RCA Plug Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE9163 CAD Drawing
75 Ohm F Female to RCA Plug Adapter

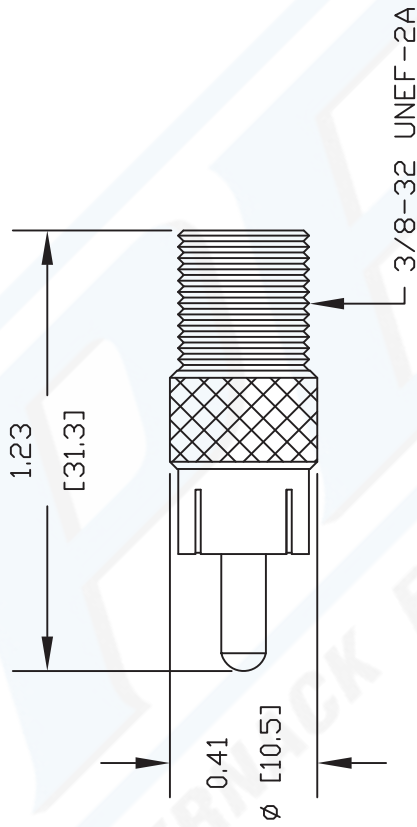

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE9163

REV. A

FSCM NO. 53919

CAD FILE 121407

SCALE N/A

SIZE A

127



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com