



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5303117

2.0-6.0 GHz

5 WATTS

LINEAR POWER RF AMPLIFIER


Solid State Broadband High Power RF Amplifier

The 5303117 is a 5 Watt broadband amplifier that covers the 2.0-6.0 GHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5303117 comes with an extended multiyear warranty.

	Parameter	Specification @ 25° C
<u>Electrical</u>		
1	Frequency Range	2.0-6.0 GHz
2	Saturated Output Power	5 Watts Min
3	Power at P1dB Compression	2 Watts Min
3	Small Signal Gain	+40 dB min
4	Gain Flatness	± 3.0 dB max
5	IP ₃	+46 dBm typical
6	Input VSWR	2:1 max
7	Harmonics	-20 dBc typical @ 5 Watts
8	Spurious Signals	< -60 dBc typical @ 5 Watts
9	Input/Output Impedance	50 Ohms nominal
10	DC Input Current	8 Amps max
11	DC Input	28 VDC nominal
12	RF Input	+0 dBm max
13	RF Input Signal Format	CW/AM/FM/PM/Pulse
14	Class of Operation	A/AB
15	On/Off	On = 5V Off = 0V
<u>Mechanical</u>		
16	Dimensions	5.0" x 2.0" x 1.0"
17	Weight	2 lb. max
18	Connectors	SMA female
19	Grounding	Chassis
20	Cooling	Adequate Heatsink Required
<u>Environmental</u>		
21	Baseplate Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice

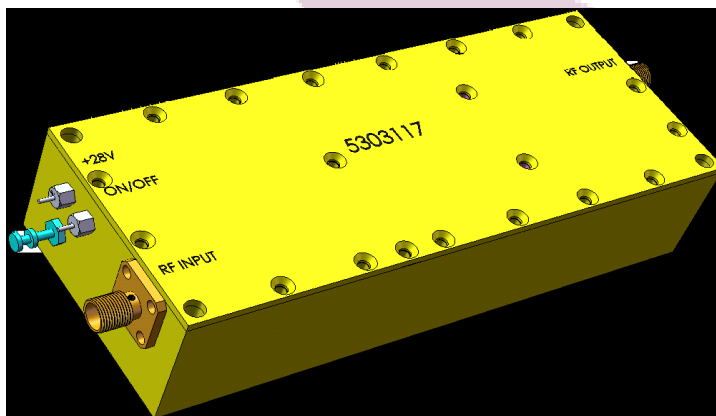




5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5303117

2.0-6.0 GHz
5 WATTS
LINEAR POWER RF AMPLIFIER

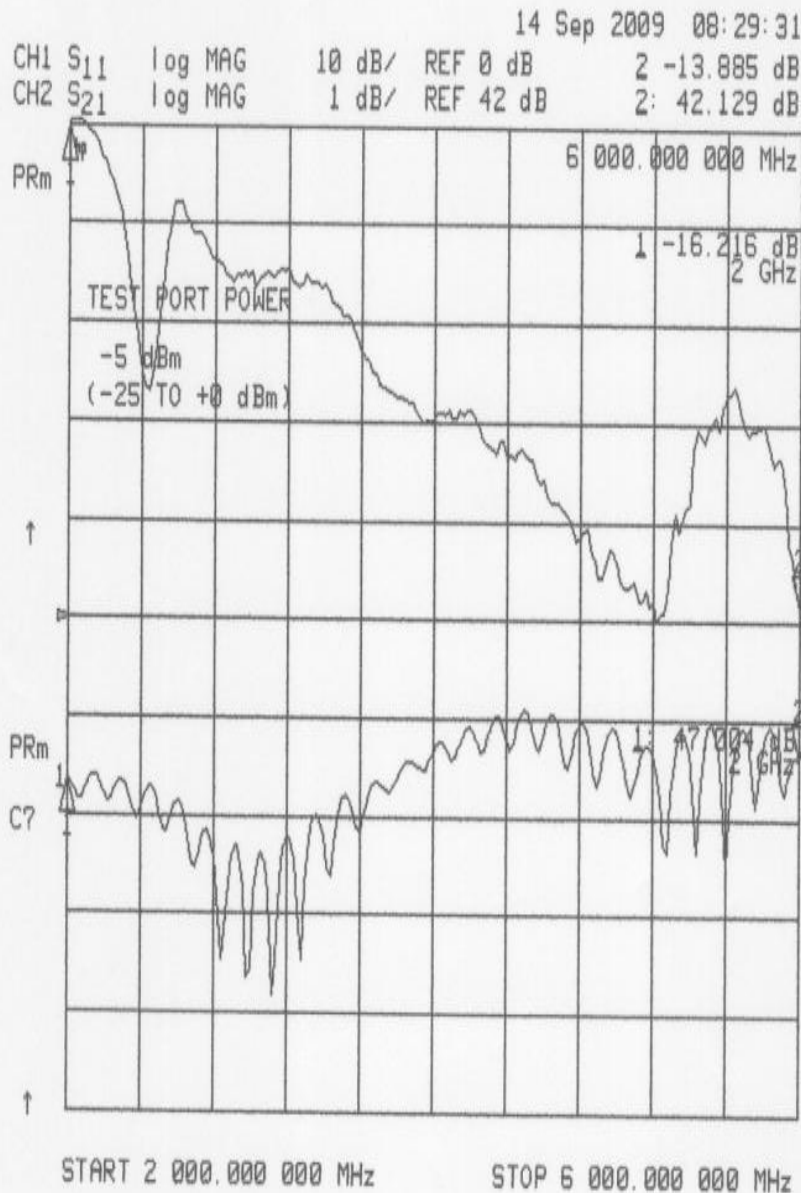

Ophir RF Model 5303117,
5 Watts minimum Psat.
2 Watts minimum P1dB.