



(BNC Attenuator)
1 Watt BNC(M) to BNC(F)

PART #	Attenuation	Frequency	Impedance	VSWR	Power
ATU 2000-BMF1-01	1±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-02	2±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-03	3±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-04	4±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-05	5±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-06	6±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-07	7±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-08	8±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-09	9±0.3	DC - 2GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-BMF1-10	10±0.5	DC - 2GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-BMF1-15	15±0.5	DC - 2GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-BMF1-20	20±1.0	DC - 2GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-BMF1-30	30±1.0	DC - 2GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-BMF1-40	40±1.5	DC - 2GHz	50 ohm±5	1.2 (Max)	1 Watt

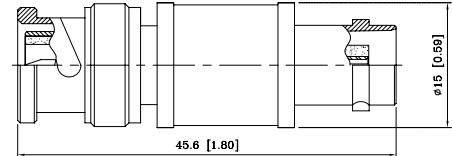


(N Attenuator)
1 Watt N(M) to N(F)

PART #	Attenuation	Frequency	Impedance	VSWR	Power
ATU 2000-NMF1-01	1±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-02	2±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-03	3±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-04	4±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-05	5±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-06	6±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-07	7±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-08	8±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-09	9±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-NMF1-10	10±0.5	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-NMF1-15	15±0.5	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-NMF1-20	20±1.0	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-NMF1-30	30±1.0	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-NMF1-40	40±1.0	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt

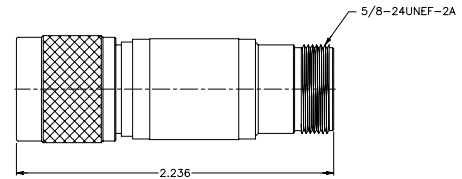

(SMA Attenuator)
1 Watt SMA(M) to SMA(F)


PART #	Attenuation	Frequency	Impedance	VSWR	Power
ATU 2000-SMF1-01	1±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-02	2±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-03	3±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-04	4±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-05	5±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-06	6±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-07	7±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-08	8±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-09	9±0.3	DC - 3GHz	50 ohm±3	1.2 (Max)	1 Watt
ATU 2000-SMF1-10	10±0.3	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-SMF1-15	15±0.5	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-SMF1-20	20±1.0	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-SMF1-30	30±1.0	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-SMF1-40	40±1.0	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt





(TNC Attenuator)
1 Watt TNC(M) to TNC(F)

PART #	Attenuation	Frequency	Impedance	VSWR	Power
ATU 2000-TMF1-01	1±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-02	2±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-03	3±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-04	4±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-05	5±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-06	6±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-07	7±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-08	8±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-09	9±0.3	DC - 3GHz	50 ohm±3	1.15 (Max)	1 Watt
ATU 2000-TMF1-10	10±0.5	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-TMF1-15	15±0.5	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-TMF1-20	20±1.0	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt
ATU 2000-TMF1-30	30±1.0	DC - 3GHz	50 ohm±5	1.2 (Max)	1 Watt

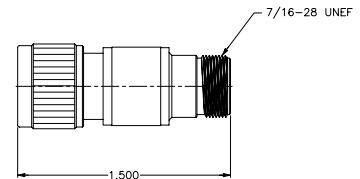

(UHF Attenuator)
1 Watt UHF(M) to UHF(F)

PART #	Attenuation	Frequency	Impedance	VSWR	Power
ATU 2000-UMF1-01	1±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-02	2±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-03	3±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-04	4±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-05	5±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-06	6±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-07	7±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-08	8±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-09	9±0.3	DC - 660MHz	50 ohm±3	1.25 (Max)	1 Watt
ATU 2000-UMF1-10	10±0.5	DC - 660MHz	50 ohm±5	1.25 (Max)	1 Watt
ATU 2000-UMF1-15	15±0.5	DC - 660MHz	50 ohm±5	1.25 (Max)	1 Watt
ATU 2000-UMF1-20	20±1.0	DC - 660MHz	50 ohm±5	1.25 (Max)	1 Watt
ATU 2000-UMF1-30	30±1.0	DC - 660MHz	50 ohm±5	1.25 (Max)	1 Watt

