



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Filters and Products



608 MHz Bandpass Filter

Part Number: AE608B9621

Specifications:

Center Frequency: 608 MHz

Insertion Loss @ Fc : <1dB


Passband 578-638 MHz Flatness <3dB

Return Loss >14dB 590-665 MHz

Rejection >50dB @ 0-508 MHz

□ >50dB @ 708-2000 MHz

Response Plot:

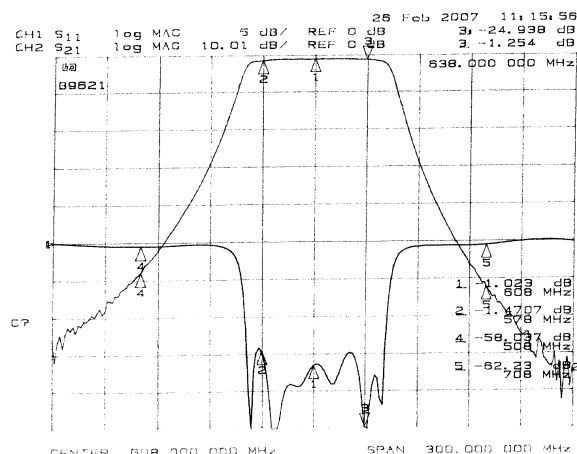

Outline Drawing:

