

# **Jacket Adapter**

## **ADP-24 Series**

#### **Features**

- Convenient, easy-grip jacket for effortless loosening
- 2.40 mm to 2.40 mm adapter (Male and/or Female)
- Specified DC to 50 GHz
- Low Insertion Loss
- Excellent broadband VSWR




## **Electrical Specifications**

Parameter	Frequency Range	Min	Тур	Max
Insertion Loss (dB)	DC-40.0 GHz		0.2	0.5
	40-50 GHz		0.5	.75
	50-65 GHz		0.65	
VSWR	DC-40.0 GHz		1.12	1.22
	40-50 GHz		1.35	1.5
	50-65 GHz		1.4	

## **Part Number Options**

Model Number	Description	
ADPM24F24	Male 2.40 mm/Female 2.40 mm Adapter	
ADPF24F24	Female 2.40 mm/Female 2.40 mm Adapter	
ADPM24M24	Male 2.40 mm/Male 2.40 mm Adapter	

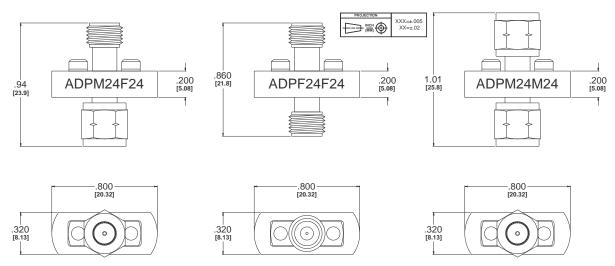

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.