Reconfigurable PXI RF Switching Modules

12K3S - Series

DC-26.5 GHz

High Density - Reconfigurable Switching Modules

12K3S-3/D	3 Dual SPDT (High Density Changeover)
12K3S-3/X	3 DPDT (High Density Transfer)
12K3S-3/3	3 SP3T (High Density 3 Channel Mux)
12K3S-3/6	3 SP6T (High Density 6 Channel Mux)

Description

The 12K3S-Series modules are designed to provide solutions to complex broadband signal routing and switching applications. Each module uses non-terminated normally open electromechanical switches that operate with less than 1 dB insertion loss up to 26.5 Ghz and extended switching life up to 2 million cycles.

The module occupies 2 slots of a 3U PXI chassis and is composed in one assembly with up to 3 individual switches (Dual SPDT-Changeover, DPDT-Transfer, SP3T or SP6T). Given that all four types of switches use the same dimensional platform each module can be reconfigured to have SPDT, DPDT, SP3T, and SP6T on the same module.

This reconfigurable platform is well suited for wide selection of switching applications for inserting and removing components in signal paths. In addition, since only the first left slot in a chassis requires electrical connection, the unit can also be used in a low cost version with extension slots.

RF Characteristics

Impedance: Operating Frequency: Switching Speed: Operating Life: 50 Ohms DC – 26.5 GHz 20 ms (max) 2,000,000 cycles (Cold Switching)

Voltage Standing Wave Ratio (VSWR)

Frequency (GHz)				
DC-4	4-8	8-12	12-18	18-26.5
1.25:1	1.35:1	1.40:1	1.50:1	1.80:1

Insertion Loss (dB)

Frequency (GHz)				
DC-4	4-8	8-12	12-18	18-26.5
0.2	0.3	0.4	0.5	0.8

Open Channel Isolation (dB)

Frequency (GHz)				
DC-4	4-8	8-12	12-18	18-26.5
70	65	60	60	50

RF CW Power (W)

	Fre	quency (GH	łz)	
DC-4	4-8	8-12	12-18	18-26.5
100 W	70 W	60 W	45 W	30 W

Power Consumption Backplane Supply

+12 VDC	+5 VDC	+3.3 VDC	-12 VDC
1 A	0.15 A	0.1 A	0 A



Command and Control

Software

The Dow-Key PXI card is supplied with an IVI compliant driver providing complete functionality for the matrix module. The driver supports the following Windows platforms: 98/2000/XP.

PXI Interface

The Dow-Key PXI Card complies with the PXI Specification 2.1. Trigger Bus, Star Trigger, Interrupts, and Local Bus are not implemented.

Recommended Software

LabVIEW LabWindows Visual Basic C/C++

Physical

Relay Type: Contact Material: I/O Connectors: Dimensions:

Shock and Vibration

Operational Shock: Random Vibration: >> Operating

>> Nonoperating

Environment

Operating Temperature: Storage Temperature: Relative Humidity: Operating Altitude: Storage Altitude: Electromechanical Beryllium copper, gold-plated SMA Female 2-slot, 3U, PXI/PCI module

30 g peak, half-sine, 11 ms pulse

5 to 500 Hz, 0.3 grms 5 to 500 Hz, 2.4 grms

0 °C to +55 °C -20 °C to +70 °C 5% to 85% (non-condensing) 5,000 m 15,000 m



Integrated Microwave Solutions

4822 McGrath Street, Ventura, CA 93003 Tel: (805) 650-0260 Fax: (805) 650-1734 Visit us at www.dowkey.com

Reconfigurable Solutions


Switching Combinations

- Direct Access to 12 internal ports
- 4x4 RF Matrix

Individual switch contols* :


- 2 SP4T
- 2 SP4T with terminations
- 2 SP4T with terminations + 2 SPDT
- 3 SPDT + DPDT
- DPDT + SPDT with terminations + SPDT

* For exact Part Numbers - consult with the Headquarter.

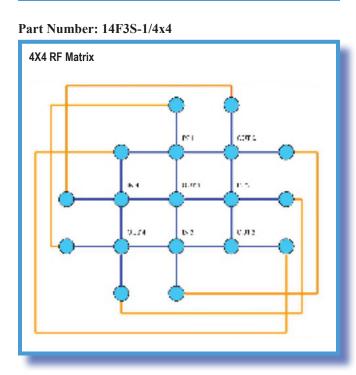


RECONFIGURED FOR 3 SWITCH SOLUTIONS

- 1 DPDT (Transfer)
- 1 Terminated SPDT
- 1 Standard SPDT



RECONFIGURED FOR 3 INDEPENDENT SWITCH SOLUTIONS

- 1- Terminated SP4T with terminations
- 2 Standard SP2T





Integrated Microwave Solutions

4822 McGrath Street, Ventura, CA 93003 Tel: (805) 650-0260 Fax: (805) 650-1734 Visit us at www.dowkey.com

* For custom reconfigurations - consult with the Main Office