
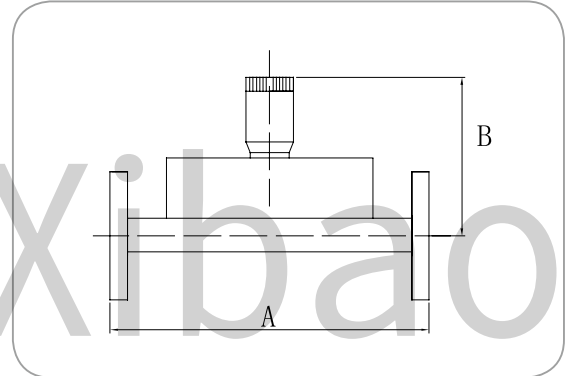


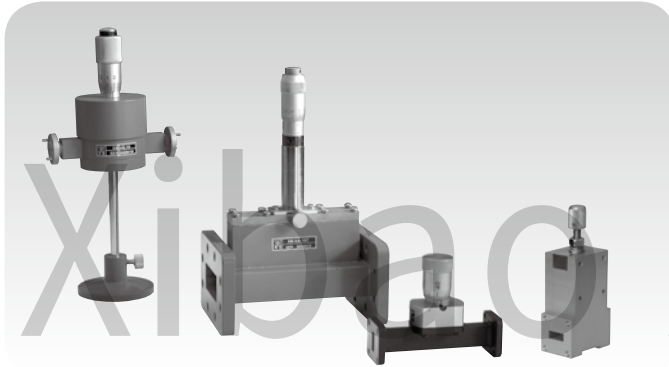

※ 型号描述 How to Order

XB-VPS-□□□

国际电工波导标准型号 EIA Model No.

可变移相器 Variable Phase Shifter

“西宝”缩写 The Abbreviation for Xibao

※ 型号及指标 Model & Specifications

型号 Model	频率范围 Freq (GHz)	法兰 Flange	相移 Phase Shift	驻波 VSWR
XB-VPS284	2.60~3.95	FDP/FDM	$\geq 180^\circ$	≤ 1.20
XB-VPS229	3.22~4.90	FDP/FDM	$\geq 180^\circ$	≤ 1.20
XB-VPS187	3.94~5.99	FDP/FDM	$\geq 180^\circ$	≤ 1.20
XB-VPS159	4.64~7.05	FDP/FDM	$\geq 180^\circ$	≤ 1.20
XB-VPS137	5.38~8.17	FDP/FDM	$\geq 180^\circ$	≤ 1.20
XB-VPS112	6.57~9.99	FBP/FBM/FBE	$\geq 180^\circ$	≤ 1.20
XB-VPS90	8.20~12.40	FBP/FBM/FBE	$\geq 180^\circ$	≤ 1.20
XB-VPS75	9.84~15.0	FBP/FBM/FBE	$\geq 180^\circ$	≤ 1.20
XB-VPS62	11.9~18.0	FBP/FBM/FBE	$\geq 180^\circ$	≤ 1.20
XB-VPS51	14.5~22.0	FBP/FBM/FBE	$\geq 180^\circ$	≤ 1.20
XB-VPS42	18.0~26.5	FBP/FBM/FBE	$\geq 180^\circ$	≤ 1.20
XB-VPS34	21.7~33.0	FBP/FBM/FBE	$\geq 180^\circ$	≤ 1.20
XB-VPS28	26.5~40.0	FBP/FBM/FBE	$\geq 180^\circ$	≤ 1.20
XB-VPS22	33.0~50.0	UG383/U	$\geq 180^\circ$	≤ 1.25
XB-VPS19	39.2~59.6	UG383/U-Mod	$\geq 180^\circ$	≤ 1.25
XB-VPS15	50.0~75.0	UG-385/U-Mod	$\geq 180^\circ$	≤ 1.25
XB-VPS12	60.5~91.9	UG-387/U-Mod	$\geq 180^\circ$	≤ 1.25
XB-VPS10	75.0~110	UG-387/U-Mod	$\geq 180^\circ$	≤ 1.25

※ 以上只是常规产品，其它品种的频率覆盖范围可从 1.45~110GHz，波导型号可从 WR510 (BJ18) ~WR10 (BJ900)

※ Other Products: F=1.45~110GHz, Waveguide WR510 (BJ18)~WR10 (BJ900)