


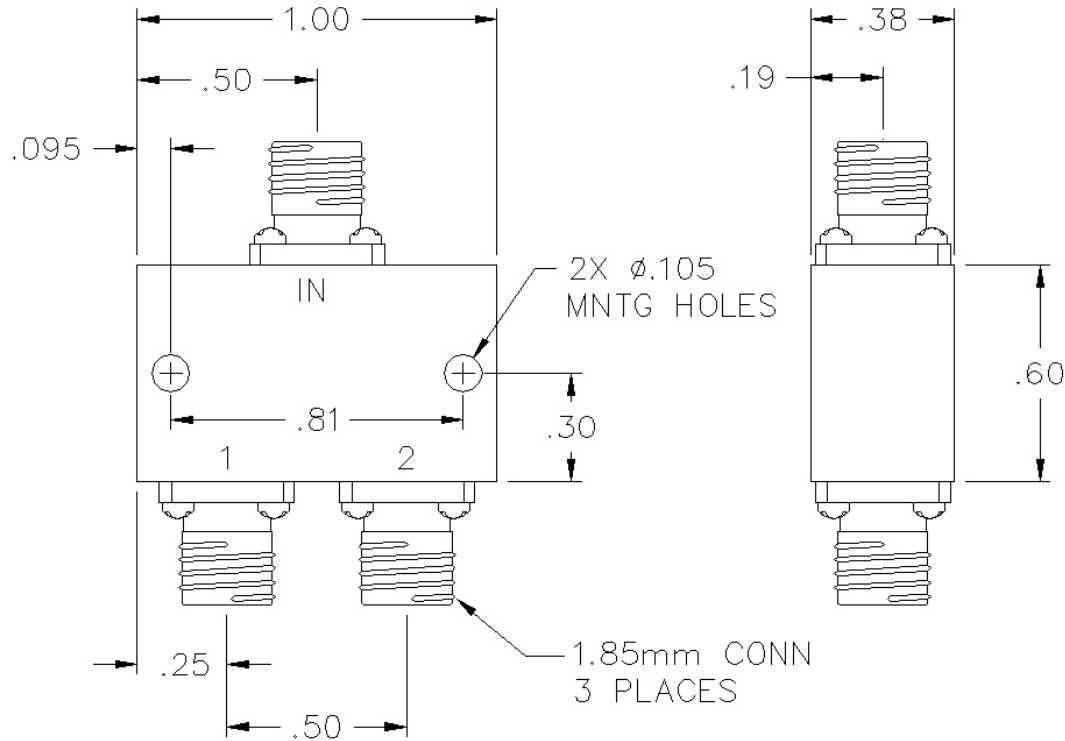

SPECIFICATIONS

Frequency Range: 8.0 - 60.0 GHz
 Insertion Loss: 2.0 dB Max
 Isolation: 10 dB Min
 Amplitude Balance: 1.0 dB Max
 Phase Balance: 15.0° Max
 VSWR: 2.50:1 Typical
 Input Power¹: 10 Watts Max

Notes:

1. Power rating is for load VSWR better than 1.20:1

1.85 mm connectors are used on this model

PULSAR MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION
 48 INDUSTRIAL WEST, CLIFTON NJ 07012
 TEL: 973-779-6262 FAX: 973-779-2727
 WWW.PULSARMICROWAVE.COM

DESCRIPTION :

2-Way Power Divider - 0°

MODEL NO. :

PS2-56-450/15S

DIMENSIONS ARE IN INCHES
 DECIMAL TOLERANCE:
 2 PLACE ± .02
 3 PLACE ± .010

SIZE
 A

CAGE CODE :
 0HR85

REV CODE :
 160308

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO
 CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1