

MHV Female to SHV Jack Adapter



TECHNICAL DATA SHEET

PE9339

MHV Female to SHV Jack Adapter

Configuration

Connector 1	MHV Female
Impedance 1	50 Ohms
Connector 2	SHV Jack
Impedance 2	50 Ohms
Adapter Design	Standard
Body Style	Straight

Mechanical Specifications

Size

Length, in [mm]	1.59 [40.39]
Width/Dia., in [mm]	0.44 [11.18]

Connector 1

Type	MHV Female
Inner Conductor Material and Plating	Silver
Body Material and Plating	Brass, Nickel

Connector 2

Type	SHV Jack
Inner Conductor Material and Plating	Silver
Body Material and Plating	Brass, Nickel

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------


URL: <http://www.pasternack.com/mhv-female-shv-jack-straight-adapter-pe9339-p.aspx>

MHV Female to SHV Jack Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE9339 CAD Drawing

MHV Female to SHV Jack Adapter

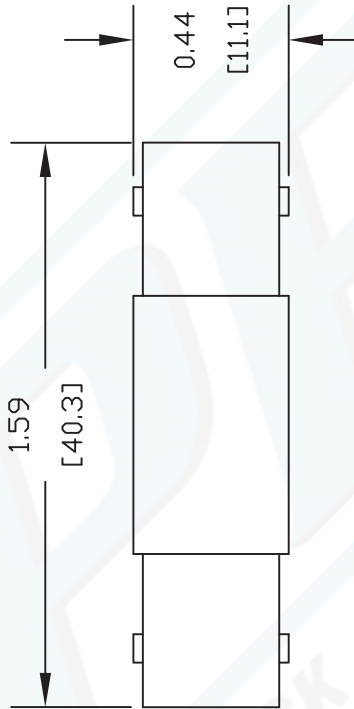

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE		FSCM NO. 53919		CAD FILE	091702	SCALE	N/A	SIZE	A	127
PE9339		REV. -								



PASTERNAK ENTERPRISES, INC.
 P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS
 ESTABLISHED 1972