



LO BUFFER-AMPLIFIER

A-1844



Features

- Frequency Range 18.0 to 44.0 GHz
- 0 to +5 dBm Typical Input Power
- +16 dBm Typical Saturated Output Power

Electrical Specifications - Specifications guaranteed from -30 to +70°C, measured in a 50-Ohm system.

Parameter	Frequency (GHz)	Min	Typ	Max
Input (dBm)	18.0-44.0		0 to +5	
Saturated Output Power (dBm)	18.0-44.0	+10	See Plot	
Small Signal Gain (dB)	18.0-44.0		See Plot	
Noise Figure (dB)	18.0-44.0		6	
Bias Requirements (mA) ¹				
+3.5 Volts DC			320	400
-5.0 Volts DC			< 5	20

¹It is required that the negative bias be applied before or concurrent with the positive bias.

Model Number	Description	Package Style
A-1844	18.0 to 44.0 GHz Amplifier (2.92 mm connectors)	ESP

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com









LO BUFFER-AMPLIFIER

Page 2

A-1844

Frequency 18.0 to 44.0 GHz

Typical Performance

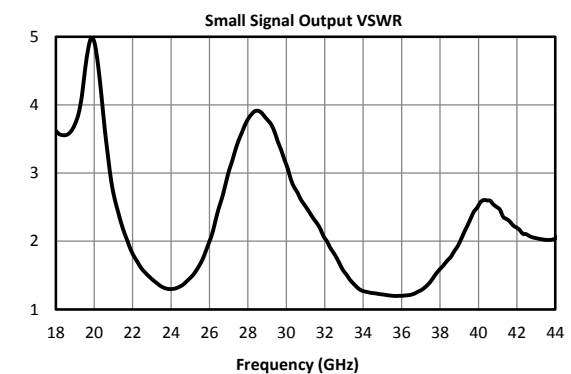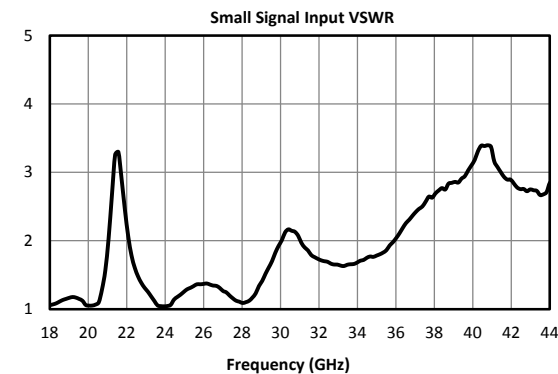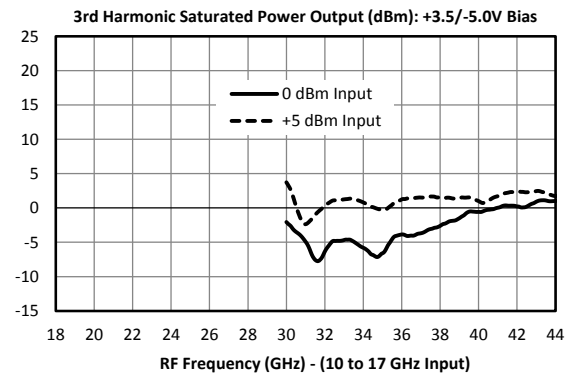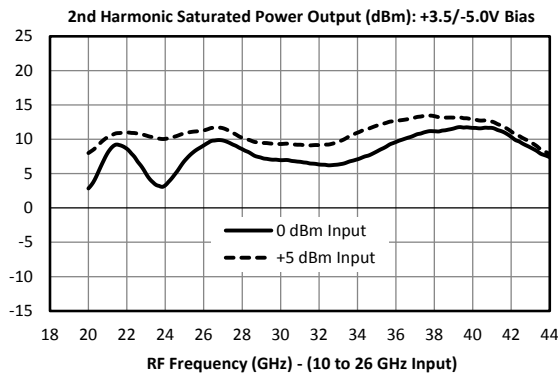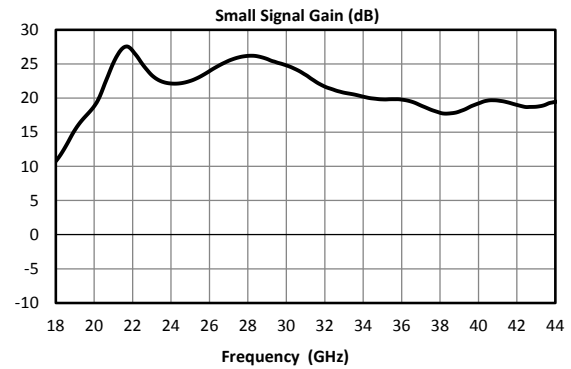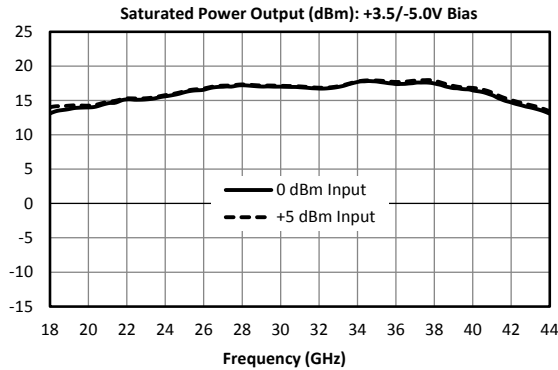

DATA SHEET NOTES:

1. Maximum input power without damage is +18 dBm at +70°C.
2. A heat sink is required for long term operation.
3. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com

11/27/13