



## 50 Ohm BNC Male to 75 Ohm F Female Adapter

### TECHNICAL DATA SHEET

**PE9150**

#### 50 Ohm BNC Male to 75 Ohm F Female Adapter

##### Configuration

Connector 1	BNC Male
Impedance 1	50 Ohms
Connector Specification 1	30μ in. minimum
Connector 2	F Female
Impedance 2	75 Ohms
Adapter Design	Standard
Body Style	Straight

##### Electrical Specifications

Frequency Range, MHz	DC to 300
Maximum VSWR	1.5:1
Maximum Operating Voltage, Volts	500

##### Mechanical Specifications

###### Temperature

Operating Range, deg C	-40 to +60
------------------------	------------

###### Size

Length, in [mm]	1.213 [30.81]
Width/Dia., in [mm]	0.571 [14.5]

##### Connector 1

Type	BNC Male
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	30μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel
Coupling Nut Plating Specification	100μ in. minimum
Body Material and Plating	Brass, Nickel
Body Plating Specification	100μ in. minimum
Dielectric Type	Teflon

##### Connector 2

Type	F Female
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	30μ in. minimum
Body Material and Plating	Brass, Nickel
Body Plating Specification	100μ in. minimum
Dielectric Type	Teflon

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm BNC Male to 75 Ohm F Female Adapter PE9150](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



## 50 Ohm BNC Male to 75 Ohm F Female Adapter

### TECHNICAL DATA SHEET

**PE9150**

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

Yes

REACH Compliant

06/18/2012

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level


50 Ohm BNC Male to 75 Ohm F Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm BNC Male to 75 Ohm F Female Adapter PE9150](#)

URL: <http://www.pasternack.com/f-female-bnc-male-straight-adapter-pe9150-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE9150 CAD Drawing  
50 Ohm BNC Male to 75 Ohm F Female Adapter

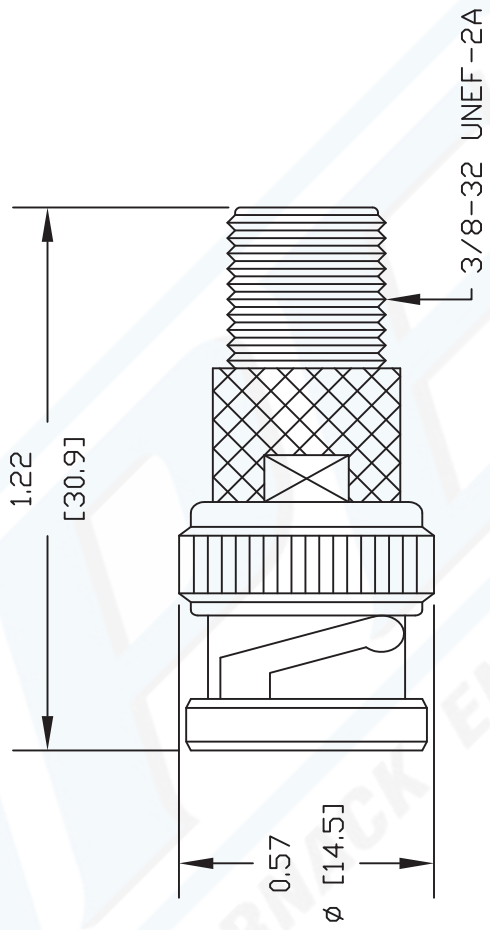

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE9150**



**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

REV. -	FSCM NO. 53919	CAD FILE 082802	SCALE N/A	SIZE A	127
--------	----------------	-----------------	-----------	--------	-----