#### VI TELEFILTER Filter specification **TFS 360K** 1/5

**Measurement condition** 

Ambient temperature: 22 °C Input power level: dBm 0

Terminating impedance: \*

118 Ω || -10.1 pF Input: 150 Ω || - 9.9 pF Output:

#### Characteristics

#### Remark:

The reference level for the relative attenuation  $a_{rel}$  of the TFS 360K is the minimum of the pass band attenuation  $a_{min}$ . The minimum of the pass band attenuation  $a_{min}$  is defined as the insertion loss  $a_e$ . The centre frequency  $f_c$  is the arithmetic mean value of the upper and lower frequencies at the 1 dB filter attenuation level relative to the insertion loss  $a_e$ . The nominal frequency  $f_N$  is fixed at 360 MHz without any tolerance. The given values for both the relative attenuation  $a_{rel}$  and the group delay ripple have to be achieved at the frequencies given below even if the centre frequency  $f_C$  is shifted due to the temperature coefficient of frequency  $TC_f$  in the operating temperature range and due to a production tolerance for the centre frequency  $f_C$ .

Data		typ.	value	to	lerance / I	limit
Insertion loss (reference level)	a <sub>e</sub>	6.5	dB	max.	10,0	dB
Nominal frequency	$f_N$				360	MHz
Pass band	PB	36,7	dB	$f_N$	± 15	MHz
Amplitude ripple	р-р	0,3	dB	max.	1	dB
Amplitude ripple **	p-p	0,3	dB			
Relative attenuation	a <sub>rel</sub>					
f <sub>N</sub> - 15 MHz f <sub>N</sub> + 15	MHz	0,3	dB	max.	1	dB
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	MHz MHz MHz MHz	55 34 35 50	dB dB dB dB	min. min. min. min.	40 25 25 40	dB dB dB dB
Group delay ripple in PB	р-р	14	ns	max.	50	ns
Group delay variation **	р-р	2	ns	max.	30	ns
VSWR **		1,5		min.	2	
Input power level ***				max.	20	dBm
Operating temperature range	OTR			-40 °C + 85 °C		
Storage temperature range				-45 °C + 85 °C		
Temperature coefficient of frequency	TC <sub>f</sub> *****	-90	ppm/K		-	

<sup>\*)</sup> The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

Generated:	
Checked / Approved:	

**Tele Filter GmbH** Potsdamer Straße 18 D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

<sup>\*\*)</sup> Applies over any 10MHz in PB

\*\*\*) This power level is allowed for short term operation (10% of life time) only, the max. input power for continuous operation is 10 dBm.

<sup>\*\*\*\*)</sup>  $\Delta f_{C}(Hz) = TC_{f}(ppm/K) \times (T - T_{o}) \times f_{To} (MHz).$ 


**VI TELEFILTER** 


# Filter specification

**TFS 360K** 

2/5


### Filter characteristic





## Construction and pin connection


(All dimensions in mm)



1	Input
2	Input RF Return
3	Ground
4	Ground
5	Output
6	Output RF Return
7	Ground
8	Ground

Date code: Year + week T 2005 U 2006 V 2007

### 50 Ohm Test circuit



Tele Filter GmbH Potsdamer Straße 18 D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

# **VI TELEFILTER**

# Filter specification

**TFS 360K** 

3/5

#### Stability characteristics

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;

DIN IEC 68 T2 - 27

2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;

DIN IEC 68 T2 - 6

3. Change of

temperature: -55 °C to 125 °C / 30 min. each / 10 cycles

DIN IEC 68 part 2 - 14 Test N

4. Resistance to

solder heat (reflow): reflow possible: twice max.;

for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

### **Packing**

Tape & Reel: IEC 286 – 3, with exeption of value for N and minimum bending radius;


tape type II, embossed carrier tape with top cover tape on the upper side;

max. pieces of filters peer reel:
reel of empty components at start:
reel of empty components at start including leader:
min. 300 mm
trailer:
min. 500 mm
min. 300 mm

Pull Off Direction -

#### Tape (all dimensions in mm)


W	:	12,00	$\pm 0.3$
Po	:	4,00	± 0,1
Do	:	1,50	+0,1/-0
E	:	1,75	± 0,1
F	:	5,50	$\pm 0,05$
G(min)	:	0,75	
P2	:	2,00	$\pm 0,05$
P1	:	8,00	± 0,1
D1(min)	:	1,50	
Ao	:	5,30	± 0,1
Во	:	5,30	± 0,1
Ct	:	9,5	± 0,1

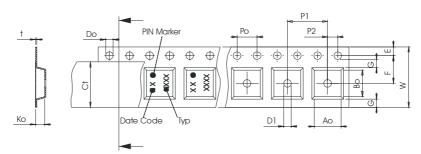

#### Reel (all dimensions in mm)

A :330 W1 : 12,4 +2/-0 W2(max) : 18,4 N(min) : 50

C : 13,0 +0,5/-0,2



The minimum bending radius is 45 mm.

Tele Filter GmbH Potsdamer Straße 18 D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

VI TELEFILTER

# Filter specification


**TFS 360K** 

4/5

### Air reflow temperature conditions

<u>Conditions</u>	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

### Chip-mount air reflow profile

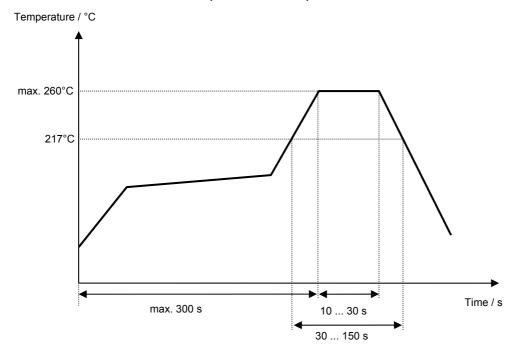

Tele Filter GmbH Potsdamer Straße 18 D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

# VI TELEFILTER Filter specification TFS 360K 5/5

## History

Version	Reason of Changes	Name	Date
1.0	- generated specification according to customer requirement	Chilla	02.02.2005
1.1	<ul><li>changed insertion loss</li><li>changed max. amplitude ripple over any 10MHz to typical value</li></ul>	Chilla	13.05.2005
1.1	<ul> <li>created filter specification</li> <li>added terminating impedance</li> <li>added typical values</li> <li>added filter characteristic</li> <li>changed date code</li> </ul>	Chilla	05.09.2005

Tele Filter GmbH Potsdamer Straße 18 D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30